

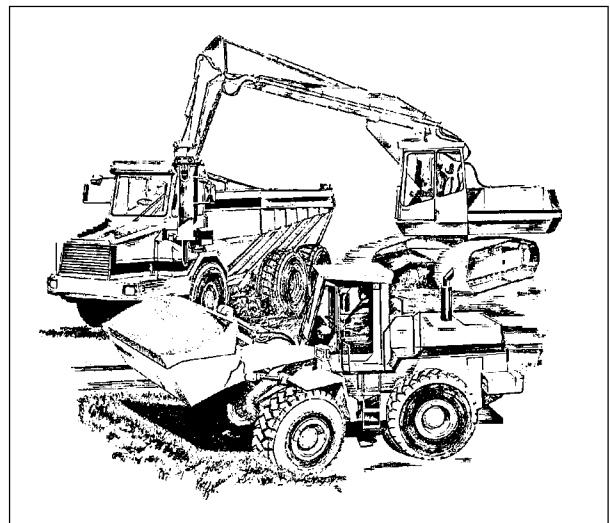


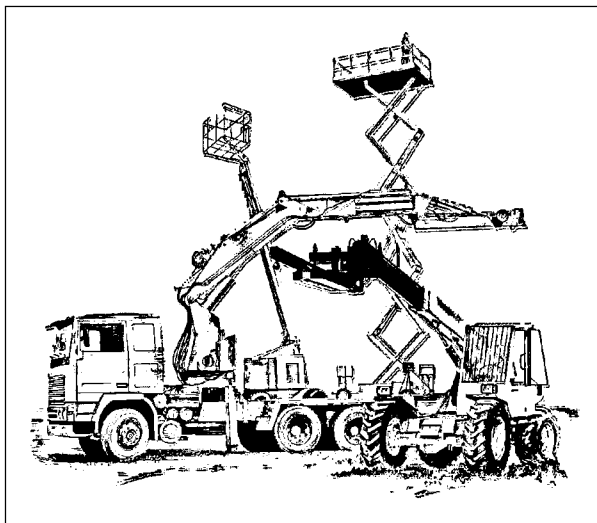

Hydraulic orbit motors & Accessories

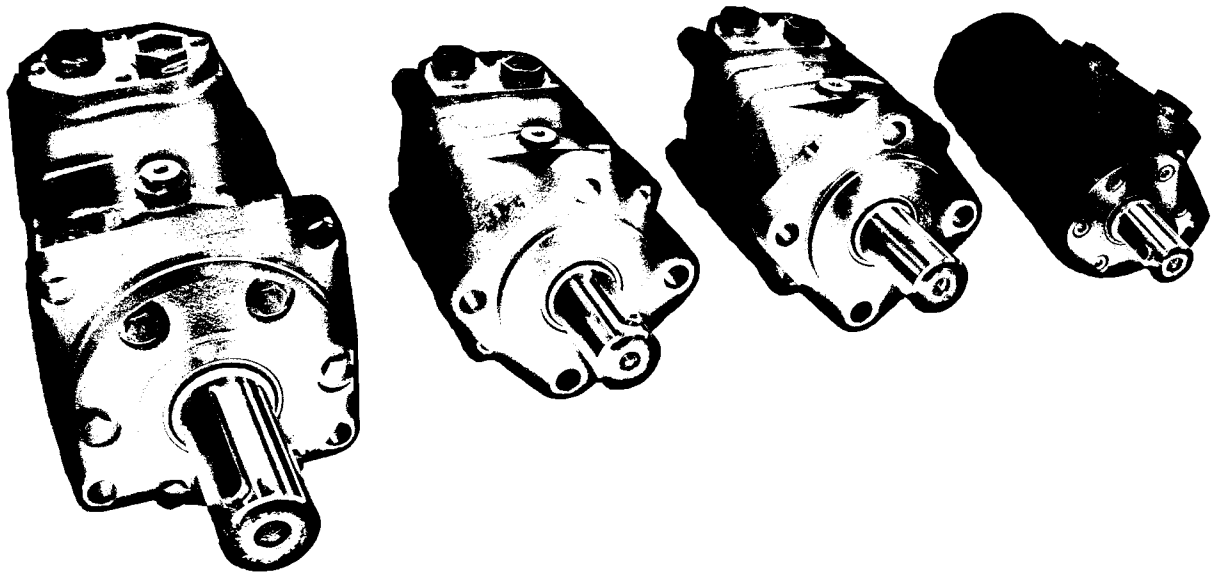

HYDRAULIC MOTORS

INDEX

➤ HYDRAULIC MOTORS

• MOTOR TYPE OM	OM-01 – OM-10
• MOTOR TYPE OP	OP-01 – OP-10
• MOTOR TYPE OP..NA	OP..NA-01 – OP..NA-03
• MOTOR TYPE OZ	OZ-01 – OZ-02
• MOTOR TYPE OR	OR-01 – OR-17
• MOTOR TYPE OK	OK-01 – OK-02
• MOTOR TYPE OPL	OPL-01 – OPL-05
• MOTOR TYPE ORL	ORL-01 – ORL-05
• MOTOR TYPE ORS	ORS-01 – ORS-02
• MOTOR TYPE OH	OH-01 – OH-07
• MOTOR TYPE OS	OS-01 – OS-22
• MOTOR TYPE OSY	OSY-01 – OSY-08
• MOTOR TYPE OT	OT-01 – OT-13
• MOTOR TYPE OTM	OTM-01 – OTM-09
• MOTOR TYPE OV	OV-01 – OV-11
• MOTOR TYPE ORB	ORB-01 – ORB-02
• MOTOR TYPE ORBR	ORBR-01 – ORBR-05

➤ APPLICATION SPECIFICATION AND GENERAL INFORMATION

General-01 – General-02



HYDRAULIC MOTORS

The operating principle of the motors is based on an internal gear design, consisting of a stator and rotor through which the output torque and speed are transmitted. The distributor valve is driven synchronously by the rotor through a cardan shaft ensuring that each one of the chambers of the motor are filled and emptied precisely.

SPOOL VALVE -The distributor valve has been integrated with the output shaft. The valve has hydrodynamic bearings, and has infinite life when load ratings are not exceeded. OM, OP, OPL, OR, ORL and OH motors have a Spool Valve.

DISC VALVE 's function is to distribute fluid to the Roller Gear Set. The pressure balanced sealing surface on the valve face and the separately driven maintains minimal leakage and mechanical losses. These gives the motors high efficiency - even at high pressures, and good starting characteristics.

GEAR SET- There are two forms of stator, hence and of gear set:

OM, OP and OPL have plain teeth. These types motors are suitable for long operating periods at moderate pressures - or short operating periods at high pressures.

OR, ORL and OH have teeth fitted with rollers. The rollers reduce local stress and the tangential reaction forces on the rotor reducing friction to a minimum. This gives long operating life and better efficiency even at continuous high pressures. Roller Gear Sets are recommended for operation with thin oil and for applications having continually reversing loads.

OS, OT and OV are suitable for continuous operation under rough operating conditions - high pressures, thin oil, or frequent reversals. The Tapered roller bearings permit high radial loads.

Standard Motor The standard motor mounting flange is located as close to the output shaft as possible. This type of mounting supports the motor close to the shaft load. This mounting flange is also compatible with many standard gear boxes.

Wheel Motor This type mounting flange makes the motor possible to fit a wheel hub or a winch drum so that the radial load acts midway between the two motor bearings. This gives the best utilization of the bearing capacity and is a very compact solution.

Needle Bearing OP and OR have an output shaft supported in needle bearing. These types motors are suitable for absorbing static and dynamic radial loads.


Short Motor This motor is assembled without the output shaft, bearings and bearing housing and has the same drive components as the standard and wheel motors. The short motor is especially suited for applications such as gear boxes, winch, reel and roll drives. Short motor applications must be designed with a bearing supported internal spline to mate with the bearing less motor drive. Product designs using these hydraulic motors provide considerable cost savings.

Low Leakage LL Series hydraulic motors have been designed to operate at the whole standard range of working conditions (pressure drop and frequency of rotation) , but with considerable decreased volumetric losses in the drainage ports. Their main purpose is to operate as series-connected motors in hydraulic systems. For this version is permissible decreasing of the maximal torque with up to 5% (at middle speed) and up to 10 % (at high speed) in comparison to the standard versions of motors.

Low Speed Valve LSV Series hydraulic motors have been designed to operate with normal pressure drop and to ensure smooth run at low speed (up to 200 min⁻¹), as the best security for operation is guaranteed at frequency of rotation 20 ÷ 50 min⁻¹. They have an increased starting pressure drop and are not recommended for using at pressure less than 40 bar.


Free Running FR Series hydraulic motors have been designed to operate with high frequencies of rotation (over than 300 min⁻¹) and low pressure drop. These motors are produced with increased clearance at all friction parts. Additional advantages of "FR" version are prolonging of the life of the hydraulic motors at high frequencies of rotation, as well as the possibility to use them in systems with big variation of the loading. Volumetric efficiency can be affected.

HYDRAULIC MOTORS OM



APPLICATION

- » Conveyors;
- » Textile machines;
- » Mining machinery;
- » Machine tools;
- » Ventilators;
- » Construction plant equipment and access platforms etc.



CONTENTS

- Specification dataOM-02
- Function diagrams OM-03+05
- Dimensions and mounting ... OM-06
- Shaft extensions OM-07
- Permissible shaft loadsOM-07
- Order codeOM-10


OPTIONS

- » Model - Spool valve, gerotor;
- » With or without flange;
- » Side and rear ports;
- » Series with pressure valve(s)
- » Shafts - straight and splined;
- » Metric and BSPP ports;
- » Other special features.


GENERAL

Displacement, [cm ³ /rev.]	8,2 ÷ 50
Max. Speed, [RPM]	1950 ÷ 400
Max. Torque, [daNm]	1,1 ÷ 4,5
Max. Output, [kW]	1,8 ÷ 2,4
Max. Pressure Drop, [bar]	100 ÷ 70
Max. Oil Flow, [l/min]	16 ÷ 20
Min. Speed, [RPM]	50 ÷ 20
Pressure fluid	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range, [°C]	-30 ÷ 90
Optimal Viscosity range, [mm ² /s]	20 ÷ 75
Filtration	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)


OMP Series with Integrated Internal Crossover Relief Valve
A → B, Δp = 100 bar (50 bar)




OMP Series with Integrated Internal Crossover Relief Valve
B → A, Δp = 100 bar (50 bar)



Pressure Losses

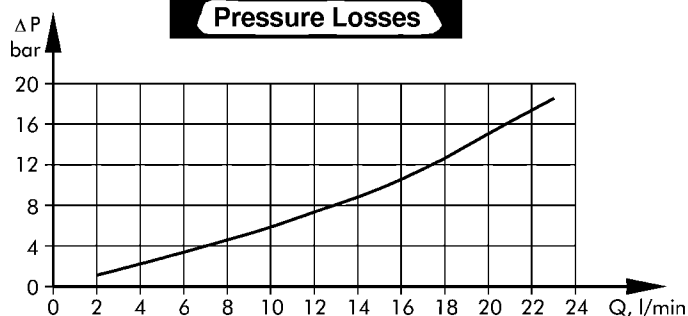

OMD Series with Integrated Internal Crossover Relief Valves
A ↔ B, Δp = 100 bar (50 bar)

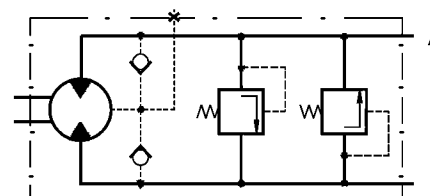



SPECIFICATION DATA

Type	OM 8	OM 12,5	OM 20	OM 32	OM 40	OM 50
Displacement [cm ³ /rev.]	8,2	12,9	20	31,8	40	50
Max. Speed, [RPM]	cont.	1950	1550	1000	630	500
	int.*	2440	1940	1250	790	625
Max. Torque [daNm]	cont.	1,1	1,6	2,5	4	4,1
	int.*	1,5	2,3	3,5	5,7	5,7
	peak**	2,1	3,3	5,1	6,4	6,6
Max. Output [kW]	cont.	1,8	2,4	2,4	2,4	1,8
	int.*	2,6	3,2	3,2	3,2	3,0
Max. Pressure Drop [bar]	cont.	100	100	100	100	80
	int.*	140	140	140	140	110
	peak**	200	200	200	200	140
Max. Oil Flow [l/min]	cont.	16	20	20	20	20
	int.*	20	25	25	25	25
Max. Inlet Pressure, [bar]	cont.	140	140	140	140	140
	int.*	175	175	175	175	175
	peak**	225	225	225	225	225
Max. Return Pressure w/o Drain Line or	cont. 0-100 RPM	140	140	140	140	140
	cont. 100-400 RPM	100	100	100	100	100
Max. Pressure in Drain Line, [bar]	cont. 400-800 RPM	50	50	50	50	-
	cont. >800 RPM	20	20	20	-	-
	int.* 0-max. RPM	140	140	140	140	140
Max. Return Pressure with Drain Line [bar]	cont.	140	140	140	140	140
	int.*	175	175	175	175	175
	peak**	225	225	225	225	225
Max. Starting Pressure with Unloaded Shift, [bar]	4	4	4	4	4	4
Min. Starting Torque [daNm]	at max. press. drop cont.	0,7	1,2	2,1	3,4	3,3
	at max. press. drop int.*	1,0	1,7	2,9	4,8	4,6
Min. Speed***, [RPM]	50	40	30	30	25	20
Weight, avg. [kg]	OM	1,9	2	2,1	2,2	2,3
	OMF(S)	2,3	2,4	2,5	2,6	2,7
	OMFS	2,7	2,8	2,9	3,0	3,1
	OMP	2,5	2,6	2,7	2,8	2,9
	OMPF	2,7	2,8	2,9	3,0	3,1
	OMD	2,6	2,7	2,8	2,9	3,0
	OMDF	2,8	2,9	3,0	3,1	3,2

* Intermittent operation: the permissible values may occur for max. 10% of every minute.


** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 30 RPM or lower, consult factory or your regional manager.


1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 13 mm²/s at operating temperature 50°C.
5. Recommended maximum system operating temperature is 82°C.
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 15-30 min.

FUNCTION DIAGRAMS

OM8

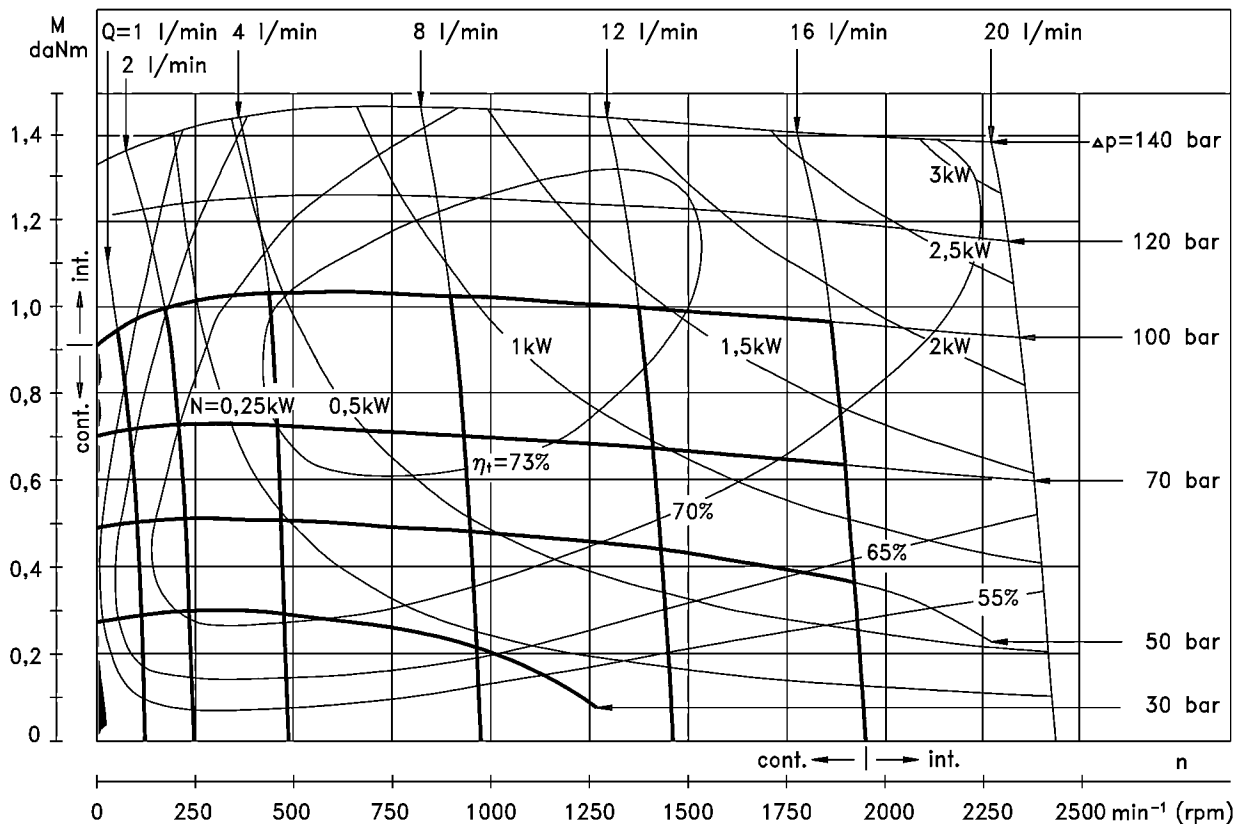


OM12,5

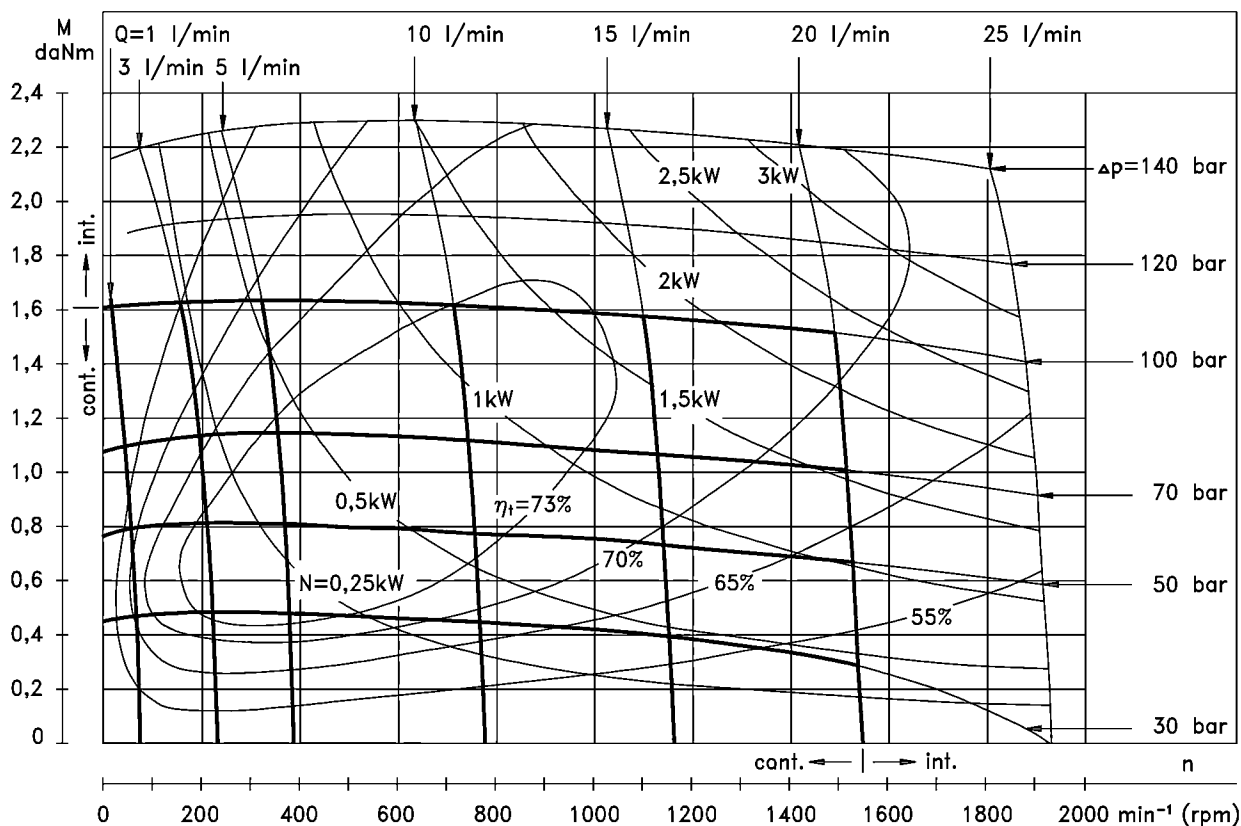


The function diagrams data was collected at back pressure 5÷10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OM 20

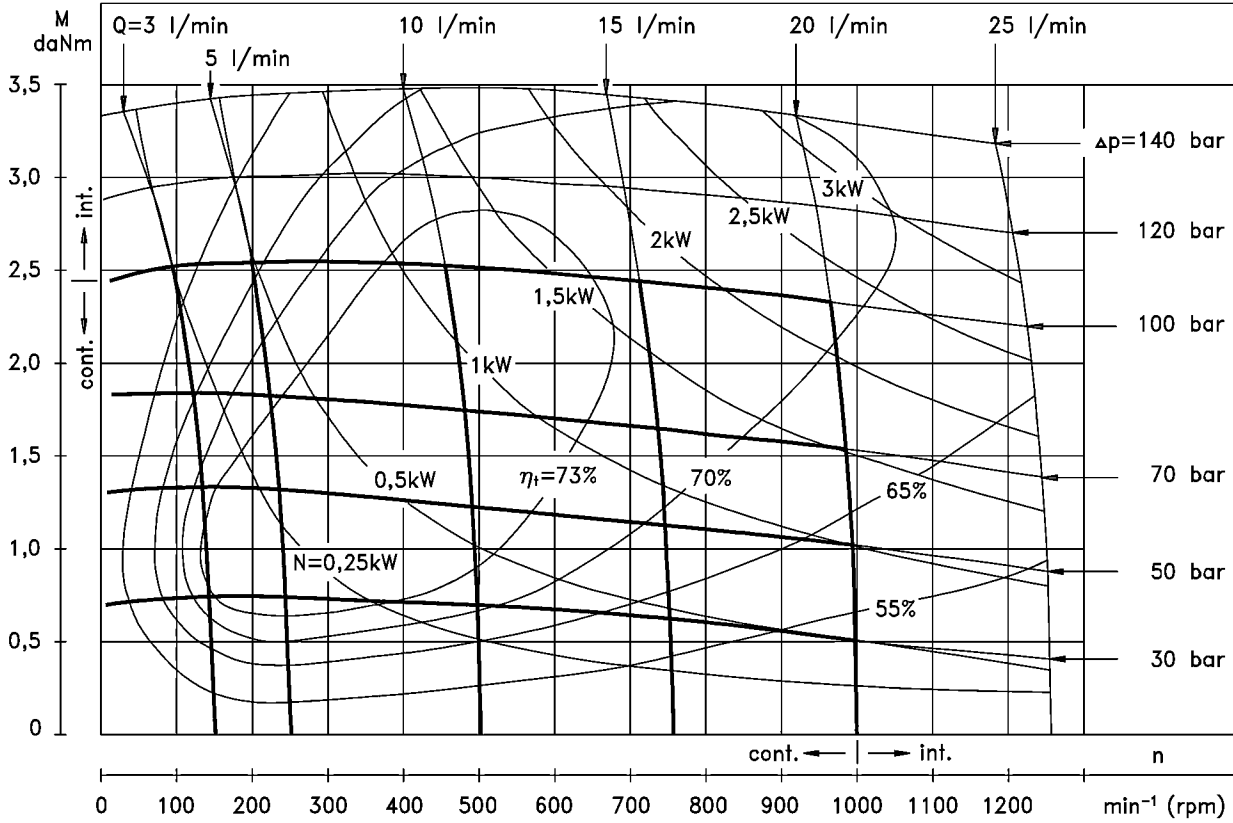


OM 32

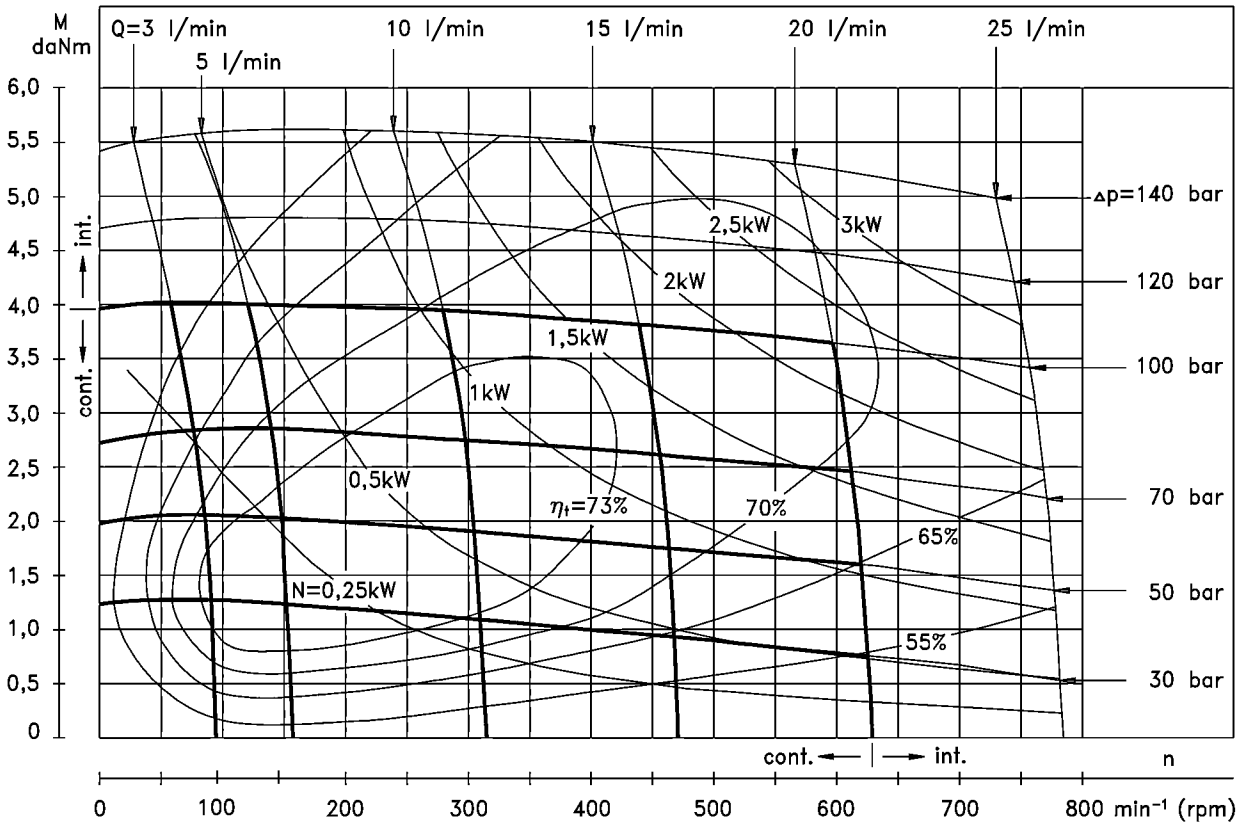


The function diagrams data was collected at back pressure 5 ± 10 bar and oil with viscosity of $32 \text{ mm}^2/\text{s}$ at 50°C .

FUNCTION DIAGRAMS

OM 40

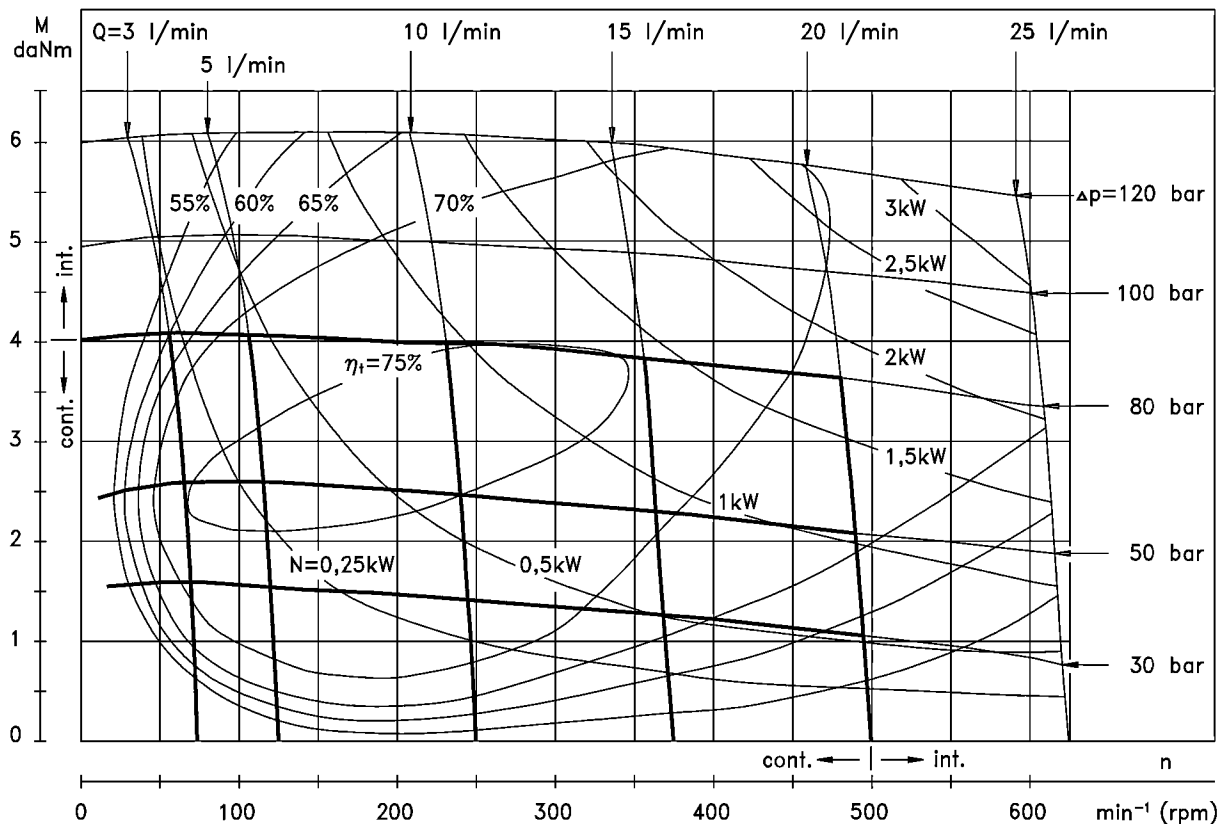


OM 50

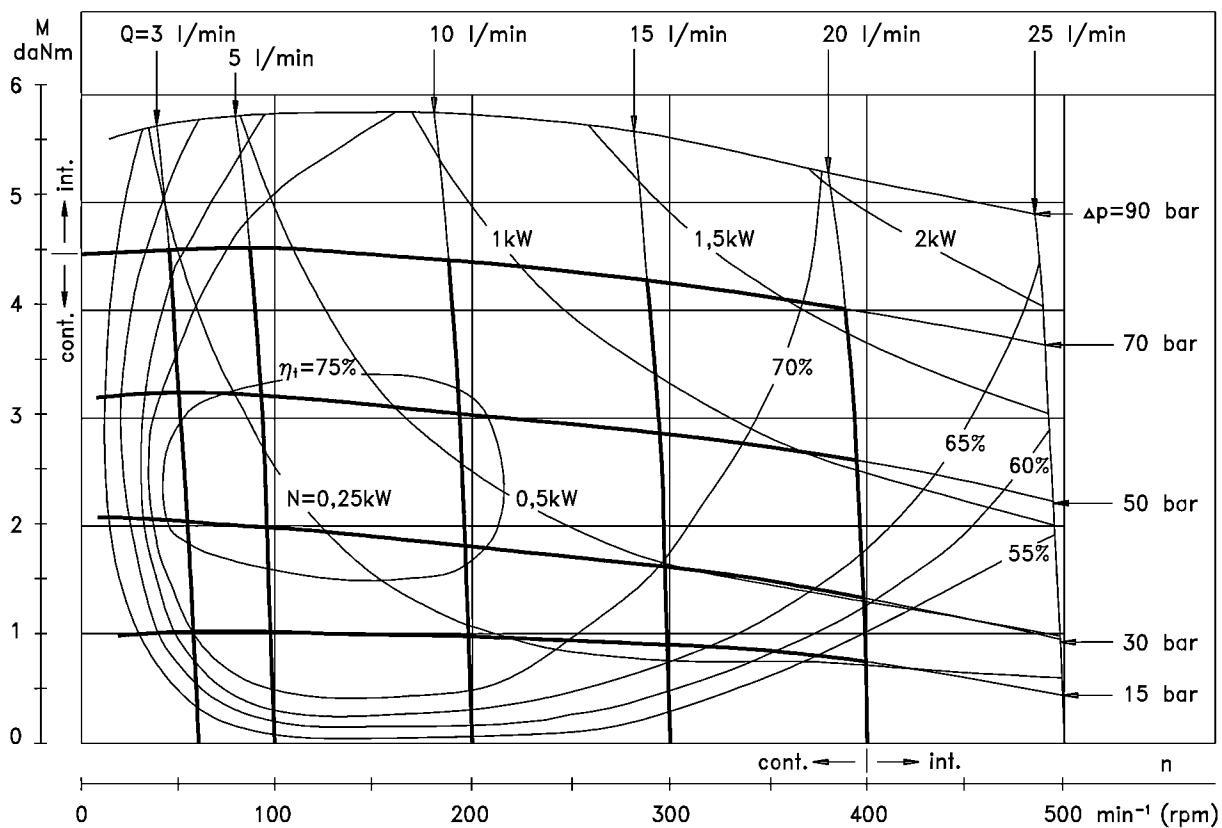

The function diagrams data was collected at back pressure 5 ± 10 bar and oil with viscosity of $32 \text{ mm}^2/\text{s}$ at 50°C .


DIMENSIONS AND MOUNTING DATA

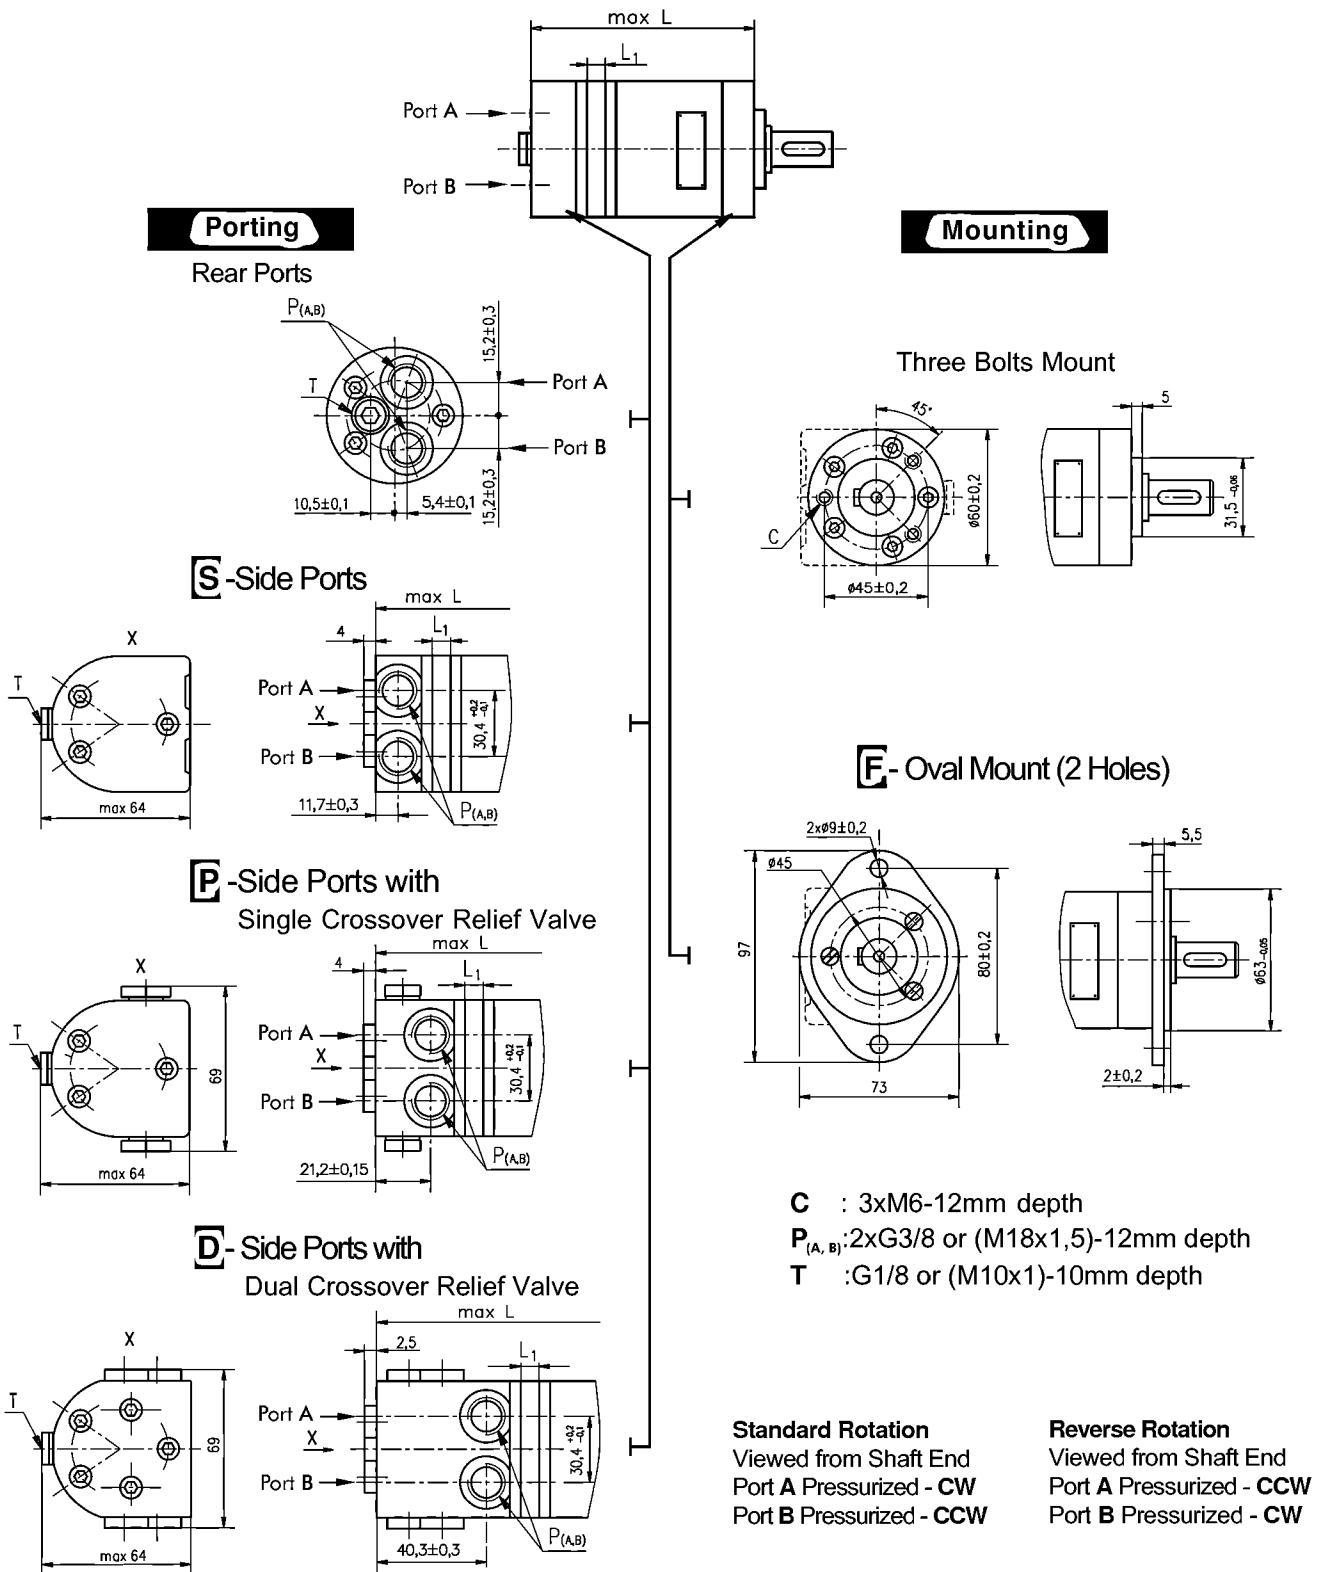


Type	L, mm	Type	L, mm	Type	L, mm	Type	L, mm	L ₁ , mm
OM 8	104	OMS 8	105	OMP 8	115	OMD 8	134	3,5
OM 12,5	106	OMS 12,5	107	OMP 12,5	117	OMD 12,5	136	5,5
OM 20	109	OMS 20	110	OMP 20	120	OMD 20	139	8,5
OM 32	114	OMS 32	115	OMP 32	125	OMD 32	144	13,5
OM 40	117,5	OMS 40	118,5	OMP 40	128,5	OMD 40	147,5	17
OM 50	121,5	OMS 50	122,5	OMP 50	132,5	OMD 50	151,5	21

SHAFT EXTENSIONS


C - $\varnothing 16$ straight, Parallel key 5x5x16 DIN 6885
Max. Torque 3,9 daNm

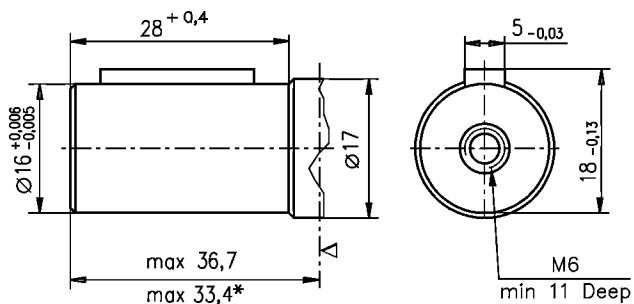

CK - $\varnothing 14$ Straight, Parallelkey 5x5x16 DIN 6885
Max. Torque 3 daNm

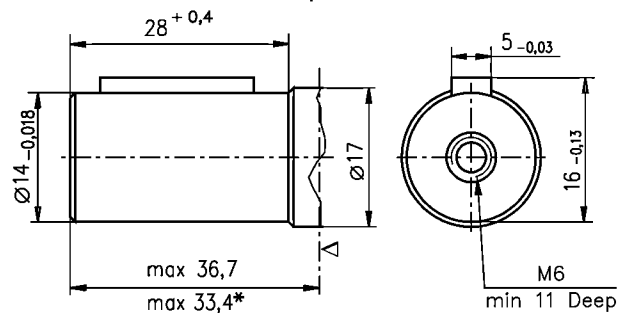


SH - $\varnothing 16,5$ Splined, B17x14 DIN 5482
Max. Torque 4,4 daNm

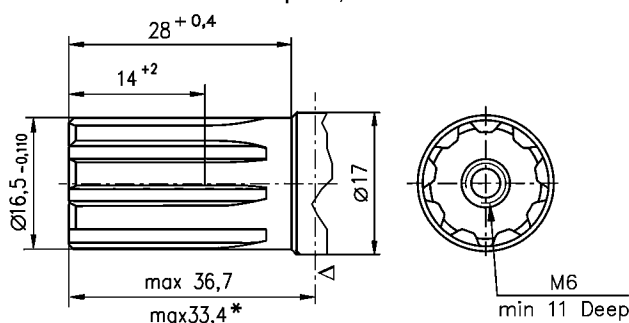

▽ - Motor Mounting Surface
* For F Mounting

PERMISSIBLE SHAFT LOAD

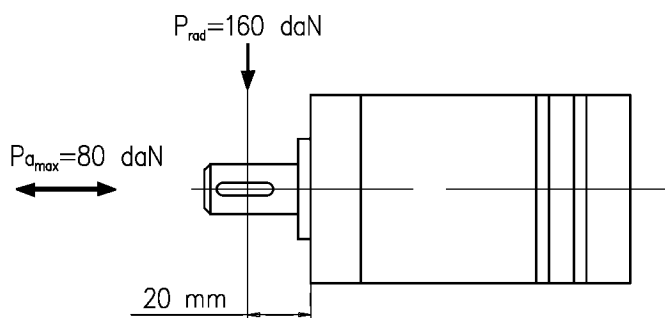


The permissible radial shaft load [Prad] is calculated from the distance [L] between the point of load application and the mounting surface:

$$P_{rad} = \frac{13040}{(61,5+L)}, \text{ [daN]}$$

[L in mm; L ≤ 80]

The drawing shows the permissible radial load when L=20 mm.


If the calculated shaft load exceeds the permissible, a flexible coupling must be used.

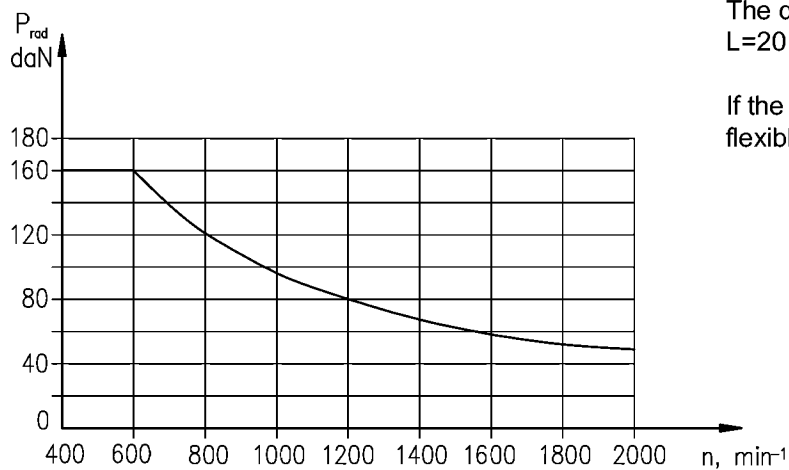

Hydraulic motors with speed sensor type OM...RS

Meta Hydraulic is introducing hydraulic motor with a new generation of speed sensor. The electric output signal is a standard voltage signal that can be used for regulating the speed of a motor.

The speed is measured by a sensor in accordance with the Hall principle. Signal processing and amplification are performed in the sensor housing. A connection is provided in the housing by a Plug connector M12 Series.

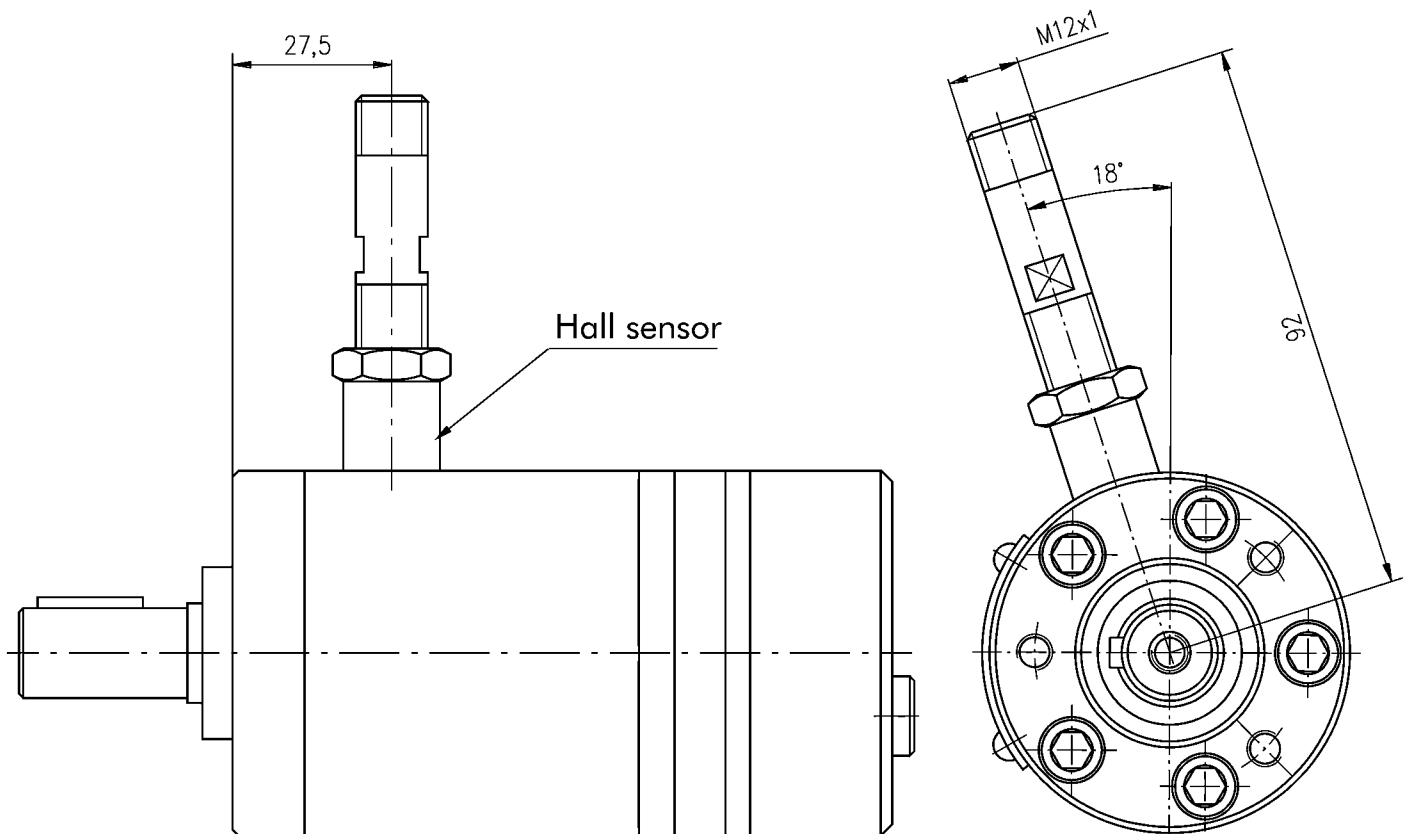


This performance is applicable for all motors of OM series. The main technical features correspond to the standard motors series OM.

DIFFERENTIAL HALL SENSOR

Technical data

Frequency range	3...20 000 Hz
Output	PNP
Power supply	10...36 VDC
Current input	20 mA (@24 VDC)
Current load	500 mA (@24 VDC; 24°C)
Ambient Temperature	minus 40... plus 125°C
Protection	IP 67
Plug connector	M12-Series
Mounting principle	ISO 6149
Pulses per revolution	30

Output signal

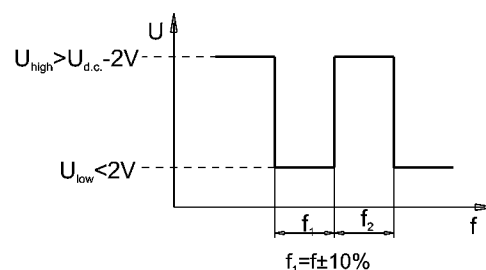


Load max.: $I_{high} = I_{low} < 50\text{mA}$


No load current, max: 20 mA

Wiring diagram


PNP

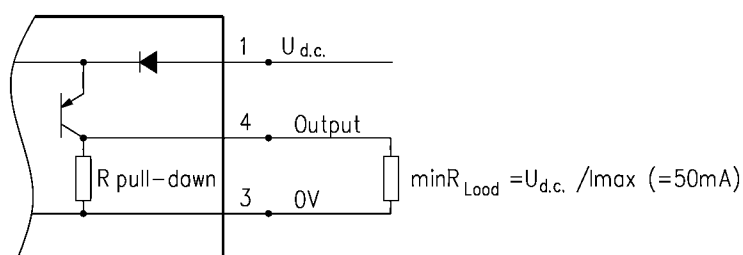

NPN

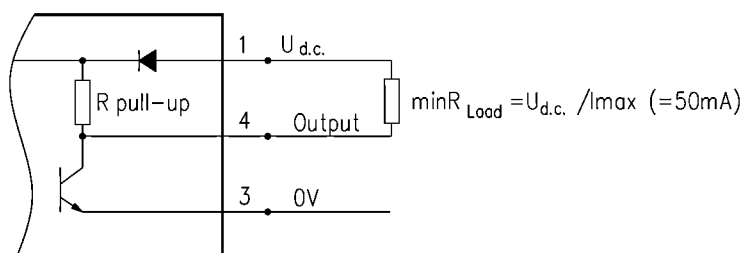

Stik type



Terminal No.	Connection
1	$U_{d.c.}$
2	No connection
3	0V
4	Output signal



ORDER CODE

	1	2	3	4	5	6	7	8	9	10	11	12
OM												▼

Pos.1- **Adjustment Option**

omit - without valve

P - Side ports with single crossover relief valve

D - Side ports with dual crossover relief valve

Pos.2- **Mounting Flange**

omit - Three bolts mount

F -Oval mount, two holes

Pos.3- **Port type** (not valid for **P** and **D** version)

omit - Rear ports

S - Side ports

Pos.4- **Displacement code**

8 - 8,2 [cm³/rev]

12,5 - 12,9 [cm³/rev]

20 - 20,0[cm³/rev]

32 - 31,8[cm³/rev]

40 - 40,0[cm³/rev]

50 - 50,0[cm³/rev]

Pos. 5- **Shaft Extensions***

C - ø16 straight Parallel key 5x5x16 DIN 6885

VC - ø16 straight Parallel key 5x5x16 DIN 6885 with corrosion resistant bushing

CK - ø14 straight, Parallel key 5x5x16 DIN 6885

SH - ø16,5 splined, B17x14 DIN 5482

Pos.6- **Ports**

omit - BSPP (ISO 228)

M - Metric (ISO 262)

Pos.7- **Line to controlled**** (see page OM - 01)

L - B→A (left running)

R - A→B (right running)

Pos.8- **Valve Rated Pressure*****

/50 - Δp=50 bar

/100 - Δp=100 bar

Pos. 9- **SpeedMonitoring**

omit - none

RS-P - with speed sensor (PNP pull-down resistor)

RS-N - with speed sensor (NPN pull-up resistor)

Pos.10- **Rotation**

omit - Standard Rotation

R - Reverse Rotation

Pos.11- **Option (Paint)******

omit - no paint

P - Painted

PC - Corrosion Protected Paint

Pos.12- **Design Series**

omit - Factory specified

NOTES:

* The permissible output torque for shafts must be not exceeded!

** For "P" option useful only.

*** For "P" and "D" option useful only.

**** Color at customer's request.


The hydraulic motors are mangano-phosphatized as standard.

HYDRAULIC MOTORS OP



APPLICATION

- » Conveyors;
- » Feeding mechanism of robots and manipulators;
- » Metal working machines;
- » Textile machines;
- » Machines for agriculture;
- » Food industries;
- » Grass cutting machinery etc.



CONTENTS

Specification dataOP-02+04
 Function diagramsOP-05+09
 Dimensions and mounting OP-10
 Wheel motor OP-11
 Shaft extensions OP-12
 Permissible shaft loads OP-13
 Order code OP-17

OPTIONS

- » Model- Spool valve, gerotor;
- » Flange and wheel mount;
- » Motor with needle bearing
- » Side and rear ports;
- » Shafts- straight, splined and tapered;
- » Shaft seal for high and low pressure;
- » Metric and BSPP ports;
- » Other special features.


GENERAL

Displacement,	[cm ³ /rev.]	25 ÷ 623,6
Max. Speed,	[RPM]	1 600 ÷ 95
Max. Torque,	[daNm]	3,3 ÷ 50
Max. Output,	[kW]	3,3 ÷ 10,5
Max. Pressure Drop,	[bar]	140 ÷ 55
Max. Oil Flow,	[l/min]	40 ÷ 60
Min. Speed,	[RPM]	10
Pressure fluid	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)	
Temperature range,	[°C]	-30 ÷ 90
Optimal Viscosity range,	[mm ² /s]	20 ÷ 75
Filtration	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)	

Oil flow in drain line

Pressure drop (bar)	Viscosity (mm ² /s)	Oil flow in drain line (l/min)
100	20	2,5
	35	1,8
140	20	3,5
	35	2,8

Pressure Losses

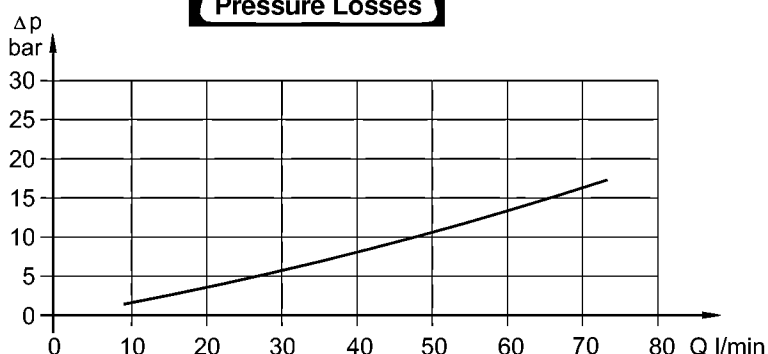



SPECIFICATION DATA

Type	OP 25	OP 32	OP 40	OP(W) 50	OP 50...B...	OP(W) 80	OP 80...B...	OP(W) 100	OP 100...B...
Displacement [cm³/rev.]	25	32,0	40,0	49,5	49,5	79,2	79,2	99	99
Max. Speed, [RPM]	cont. 1600	1560	1500	1210	1210	755	755	605	605
	int.* 1800	1720	1750	1515	1515	945	945	755	755
Max. Torque, [daNm]	cont. 3,3	4,3	6,2	9,4	9,4	15,1	15,1	19,3	19,3
	int.* 4,7	6,1	8,2	11,9	11,9	19,5	19,5	23,7	23,7
	peak** 6,7	8,6	10,7	14,3	14,3	22,4	22,4	27,5	27,5
Max. Output, [kW]	cont. 4,5	5,8	8,4	10,1	10,1	10,2	10,2	10,5	10,5
	int.* 6,1	7,8	11,6	12,2	12,2	12,5	12,5	12,8	12,8
Max. Pressure Drop, [bar]	cont. 100	100	120	140	140	140	140	140	140
	int.* 140	140	155	175	175	175	175	175	175
	peak** 225	225	225	225	225	225	225	225	225
Max. Oil Flow, [lpm]	cont. 40	50	60	60	60	60	60	60	60
	int.* 45	55	70	75	75	75	75	75	75
Max. Inlet Pressure, [bar]	cont. 175	175	175	175	175	175	175	175	175
	int.* 200	200	200	200	200	200	200	200	200
	peak** 225	225	225	225	225	225	225	225	225
Max. Return Pressure w/o Drain Line or Max. Pressure in Drain Line, [bar]	cont. 0-100 RPM 150	150	150	150	100	150	100	150	100
	cont. 100-300 RPM 75	75	75	75	30	75	30	75	30
	cont. 300-600 RPM 50	50	50	50	15	50	15	50	15
	cont. >600 RPM 20	20	20	20	-	20	-	20	-
	int.* 0-max RPM 150	150	150	150	100	150	100	150	100
Max. Return Pressure with Drain Line, [bar]	cont. 175	175	175	175	175	175	175	175	175
	int.* 200	200	200	200	200	200	200	200	200
	peak** 225	225	225	225	225	225	225	225	225
Max. Starting Pressure with Unloaded Shaft [bar]	10	10	10	10	10	10	10	10	10
Min. Starting Torque [daNm]	at max. press. drop cont. 3	4	5,4	7,8	7,8	13,2	13,2	16,6	16,6
	at max. press. drop int.* 4,2	5,6	6,9	10	10	16,8	16,8	21	21
Min. Speed [RPM]	20	15	10	10	10	10	10	10	10
Weight [kg]	OPF 5,6	5,6	5,7	5,8		5,9		6,1	
	OP(F)(E)...B...				5,9 (6,4)		6 (6,5)		6,2 (6,7)
	OPQ(N)			5,2		5,3		5,5	
	OP(F)(N)E			6,3		6,4		6,6	
	OPW(N)			5,5		5,6		5,8	
	OPQ(N)E			5,7		5,8		6,0	

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 10 RPM or lower, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommended using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 13 mm²/s at operating temperatures.
5. Recommended maximum system operating temperature is 82°C.
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

SPECIFICATION DATA (continued)

Type		OP 125 OPW 125	OP 125...B...	OP 160 OPW 160	OP 160...B...	OP 200 OPW 200	OP 200...B...
Displacement, [cm ³ /rev.]		123,8	123,8	158,4	158,4	198	198
Max. Speed, [RPM]	cont.	486	486	378	378	303	303
	int.*	605	605	472	472	378	378
Max. Torque [daNm]	cont.	23,7	23,7	31,3	31,3	36,6	36,6
	int.*	29,8	29,8	37,8	37,8	45,6	45,6
	peak**	36,5	36,5	43,8	43,8	55	55
Max. Output, [kW]	cont.	10	10	10,1	10,1	10	10
	int.*	12	12	12,1	12,1	12	12
Max. Pressure Drop [bar]	cont.	140	140	140	140	140	140
	int.*	175	175	175	175	175	175
	peak**	225	225	225	225	225	225
Max. Oil Flow [l/min]	cont.	60	60	60	60	60	60
	int.*	75	75	75	75	75	75
Max. Inlet Pressure [bar]	cont.	175	175	175	175	175	175
	int.*	200	200	200	200	200	200
	peak**	225	225	225	225	225	225
Max. Return Pressure w/o Drain Line or	cont. 0-100 RPM	150	100	150	100	150	100
	cont. 100-300 RPM	75	30	75	30	75	30
Max. Pressure in Drain Line, [bar]	cont. 300-600 RPM	50	15	50	15	50	15
	cont. >600 RPM	-	-	-	-	-	-
	int.* 0-max. RPM	150	100	150	100	150	100
Max. Return Pressure with Drain Line [bar]	cont.	175	175	175	175	175	175
	int.*	200	200	200	200	200	200
	peak**	225	225	225	225	225	225
Max. Starting Pressure with Unloaded Shaft, [bar]		9	9	8	8	7	7
Min. Starting Torque [daNm]	at max. press drop cont.	20,7	20,7	28,2	28,2	33,5	33,5
	at max. press. drop int.*	26,6	26,6	35,5	35,5	42,6	42,6
Min. Speed***, [RPM]		10	10	10	10	10	10
Weight, avg. [kg]	OPF	6,2		6,4		6,6	
	OP(F)(E)... B...		6,3(6,8)		6,5(6,9)		6,7(7,2)
	OPQ(N)	5,6		5,8		6,0	
	OP(F)(N)E	6,7		6,9		7,1	
	OPW(N)	5,9		6,1		6,3	
	OPQ(N)E	6,1		6,3		6,5	

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 10 RPM or lower, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure drop must not occur simultaneously.

2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.

3. Recommended using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.

4. Recommended minimum oil viscosity 13 mm²/s at operating temperatures.

5. Recommended maximum system operating temperature is 82°C.

6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.



SPECIFICATION DATA (continued)

Type		OP(W) 250	OP 250...B...	OP(W) 315	OP 315...B...	OP(W) 400	OP 400...B...	OP 500	OP 630
Displacement, [cm³/rev.]		247,5	247,5	316,8	316,8	396	396	495	623,6
Max. Speed, [RPM]	cont.	242	242	190	190	150	150	120	95
	int.*	303	303	236	236	189	189	150	120
Max. Torque [daNm]	cont.	38	47	38	48,6	36	50	39	44
	int.*	58,3	58,3	56	56	59	59	57	64
	peak**	68,5	68,5	85	85	85,4	85,4	78	82
Max. Output, [kW]	cont.	7,5	9,5	5,7	7,6	4,6	6,2	3,5	3,3
	int.*	12	12	9	9	7,8	7,8	7,2	5,6
Max. Pressure Drop [bar]	cont.	110	140	90	120	70	95	60	55
	int.*	175	175	140	140	115	115	90	80
	peak**	225	225	225	225	180	180	130	110
Max. Oil Flow [l/min]	cont.	60	60	60	60	60	60	60	60
	int.*	75	75	75	75	75	75	75	75
Max. Inlet Pressure [bar]	cont.	175	175	175	175	175	175	140	140
	int.*	200	200	200	200	200	200	175	175
	peak**	225	225	225	225	225	225	225	225
Max. Return Pressure w/o Drain Line or Max. Pressure in Drain Line, [bar]	cont. 0-100 RPM	150	100	150	100	150	100	150	150
	cont. 100-300 RPM	75	30	75	30	75	30	75	-
Max. Return Pressure with Drain Line [bar]	cont. 300-600 RPM	-	-	-	-	-	-	-	-
	cont. >600 RPM	-	-	-	-	-	-	-	-
	int.* 0-max. RPM	150	100	150	100	150	100	150	150
Max. Starting Pressure with Unloaded Shaft, [bar]	cont.	175	175	175	175	175	175	140	140
	int.*	200	200	200	200	200	200	175	175
	peak**	225	225	225	225	225	225	225	225
Min. Starting Torque [daNm]	at max. press drop cont.	33,6	42,8	34,4	45,8	34,5	46,8	36	41,5
	at max. press. drop int.*	54,2	54,2	61,9	61,9	60,8	60,8	54	62
Min. Speed***, [RPM]		10	10	10	10	10	10	10	10
Weight, avg. [kg]	OPF	6,8		7,1		7,6		8,9	9,5
	OP(F)(E)... B...		6,9(7,4)		7,2(7,7)		7,7(8,2)		
	OPQ(N)	6,2		6,5		6,8		8,3	9,0
	OP(F)(N)E	7,3		7,6		8,1		9,3	10
	OPW(N)	6,5		6,8		7,2			
	OPQ(N)E	6,7		7,0		7,3		8,8	8,5

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 10 RPM or lower, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure drop must not occur simultaneously.

2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.

3. Recommended using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.

4. Recommended minimum oil viscosity 13 mm²/s at operating temperatures.

5. Recommended maximum system operating temperature is 82°C.

6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

SPECIFICATION DATA for OP...LSV

Low Speed Valve (LSV) "LSV" Series hydraulic motors have been designed to operate with normal pressure drop and to ensure smooth run at low speed (up to 200 RPM), as the best security for operation is guaranteed at frequency of rotation $20 \div 50$ RPM . They have an increased starting pressure drop and are not recommended for using at pressure less than 40 bar.

Look at specification data for hydraulic motors standard version. The modification concerns only the following parameters: maximum speed, maximum output, maximum Oil flow and maximum starting pressure.

Type		OP 25	OP 32	OP 40	OP 50	OP 80	OP 100	OP 125	OP 160	OP 200	OP 250	OP 315	OP 400	OP 500	OP 630
Max. Speed [RPM]	Cont.	200	200	200	200	200	200	200	200	200	200	190	150	80	64
	Int.*	250	250	250	250	250	250	250	250	250	250	236	190	101	80
Max. Output [kW]	Cont.	0,7	0,9	1,2	2,0	3	3,8	4,9	6,1	7,0	5,2	4,2	3,4	2,9	2,6
	Int.*	1,2	1,5	2,0	3,2	5	6,0	7,2	9,5	9,8	9,1	7,2	6,0	5,0	4,2
Max. Oil Flow [lpm]	Cont.	9,0	11,0	11	15	22	24	30	34	40	40	40	40	40	40
	Int.*	13,5	16,5	14	20	29	33	38	46	50	50	50	50	50	50
Max. Starting Pressure with unloaded Shaft, [bar]		25	25	25	20	20	20	20	15	15	15	12	12	10	10

SPECIFICATION DATA for OP...LL

Low Leakage (LL) "LL" Series hydraulic motors have been designed to operate at the whole standard range of working conditions (pressure drop and frequency of rotation) , but with considerable decreased volumetric losses in the drainage ports. Their main purpose is to operate as series-connected motors in hydraulic systems.

For this version is permissible decreasing of the maximal torque with up to 5% (at middle speed) and up to 10% (at high speed) in comparison to the standard versions of motors.

Look at specification data for hydraulic motors series OP standard version. The modification concerns only the parameters: maximum torque, maximum output, minimum starting torque.

Type		OP 25	OP 32	OP 40	OP 50	OP 80	OP 100	OP 125	OP 160	OP 200	OP 250	OP 315	OP 400	OP 500	OP 630
Max. Torque [daNm]	Cont.	3,1	4,1	5,8	9,0	14,4	18,4	22,5	29,8	34,8	44,6	46,2	47,5	38	42,8
	Int.*	4,3	5,8	7,8	11,3	18,5	22,5	28,3	36,0	43,3	55,4	53,2	56,0	55	62,0
Max. Output [kW]	Cont.	4,3	5,6	8,2	10	10,1	10,4	9,9	10	9,9	9,4	7,5	6,1	3,4	3,2
	Int.*	6,0	7,7	11,5	12	12,3	12,6	11,8	12	11,8	11,8	8,9	7,7	7,1	5,5
Max. Pressure Drop [bar]	Cont.	100	100	120	140	140	140	140	140	140	140	120	95	60	55
	Int.*	140	140	155	175	175	175	175	175	175	175	140	115	90	80
Min. Starting Torque [daNm]	Cont.	4,5	5,7	6,8	7,4	12,5	15,8	19,6	26,8	31,8	40,7	43,5	44,5	46	50
	Int.*	6,0	7,0	8,0	9,5	16,0	20,0	25,2	33,7	40,5	51,5	58,8	57,8	52	60

SPECIFICATION DATA for OP...FR

Free Running version "FR" these are the hydraulic motors with reduced mechanical losses , for which at disengaged condition (unconnected with driving mechanism) the rotation of the shaft could be realized by means of small torque. This advantage is especially useful at operating with high frequencies of rotation (over than 300 min^{-1}) and low pressure drop, which is intended for types with displacements of up to 200 cm³. It is normal for these for the different condition of operation to have high torque, as well as high volume losses: the values of the volumetric efficiency are lower (up to 5 % for middle and up to 10 % for high values of the pressure drop), than these of the normal versions. That's why the recommended operating for "FR" version is for applications with pressure drop up to 100 bar.


Additional advantages of "FR" version are prolonging of the life of the hydraulic motors at high frequencies of rotation, as well as the possibility to use them in systems with big variation of the loading.

Look at specification data for hydraulic motors series OP standard version. Only the parameter Starting Pressure is modified.


Type	OP 25	OP 32	OP 40	OP 50	OP 80	OP 100	OP 125	OP 160	OP 200
Max. Starting Pressure with Unloaded Shaft, [bar]	8	8	8	8	8	8	7,5	6,5	5,5

FUNCTION DIAGRAMS

OP 25

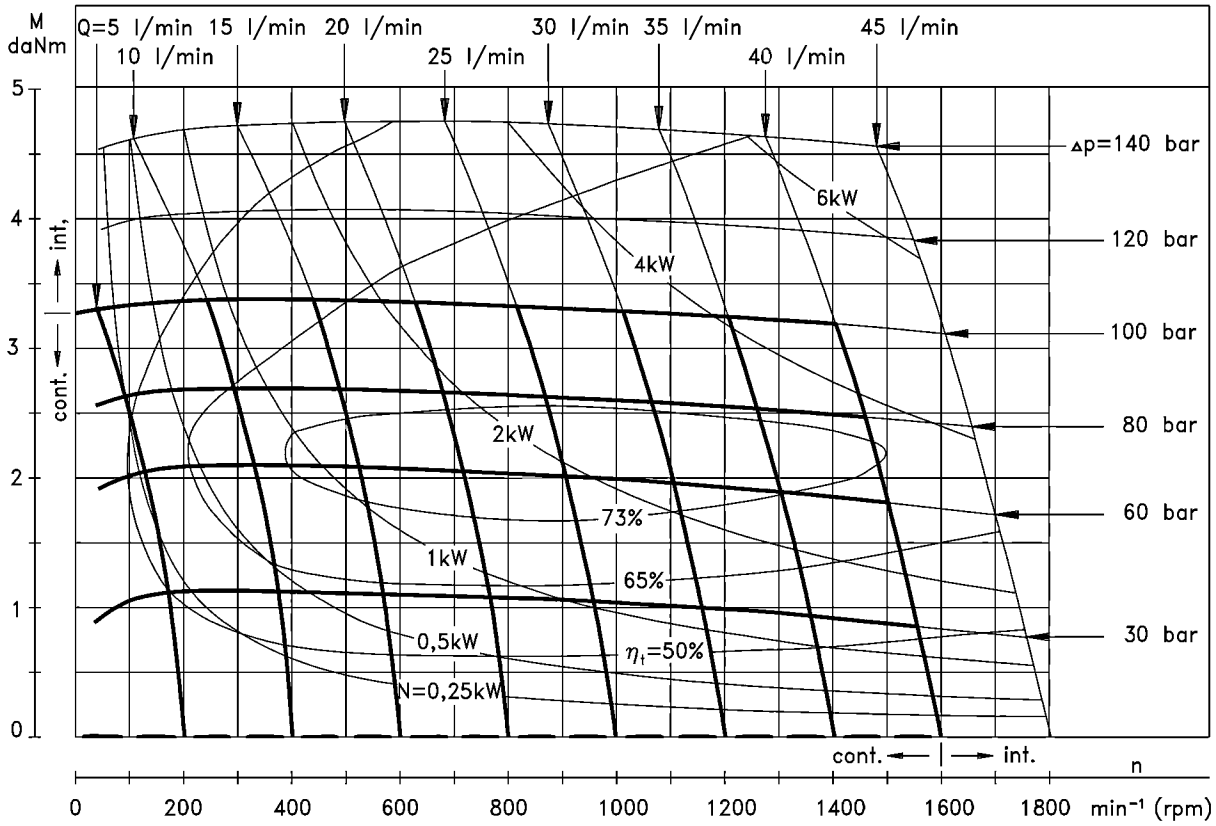


OP 32

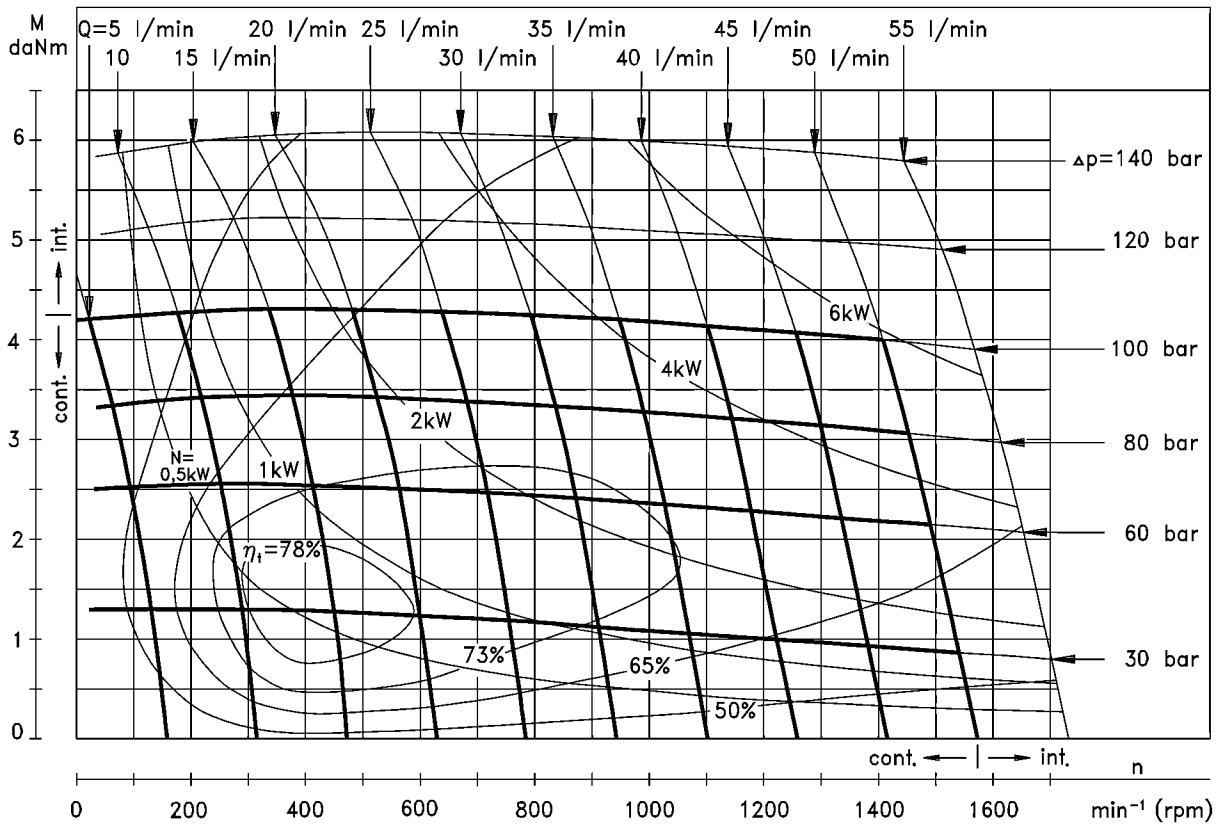


The function diagrams data was collected at back pressure 5÷10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OP 40

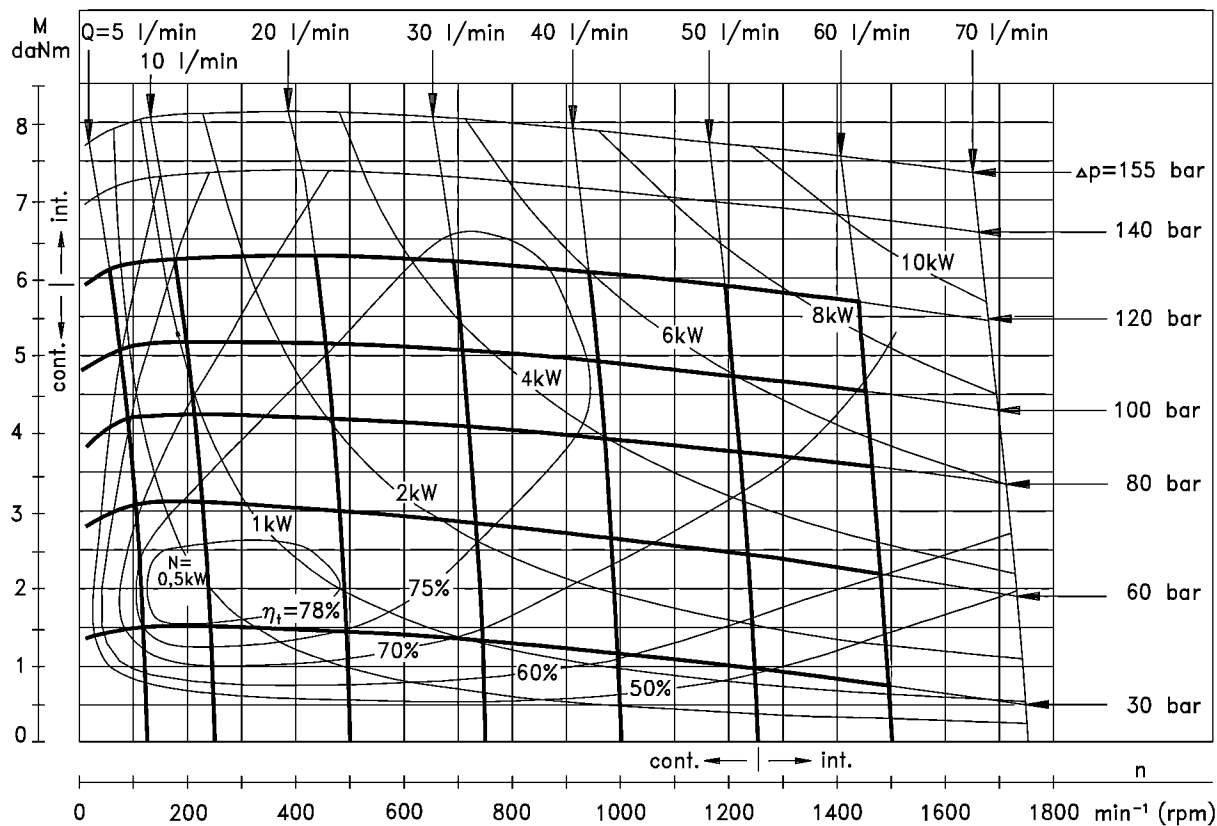


OP 50

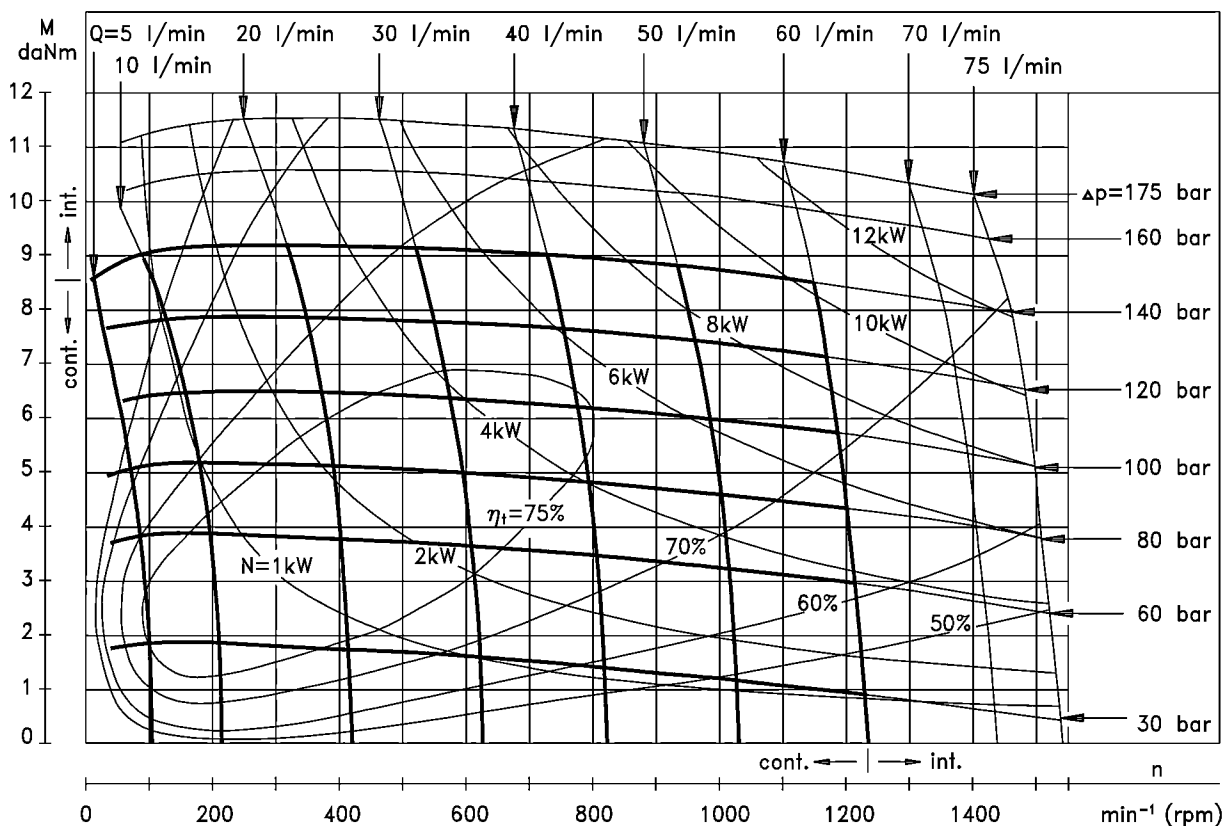


The function diagrams data was collected at back pressure 5÷10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OP 80

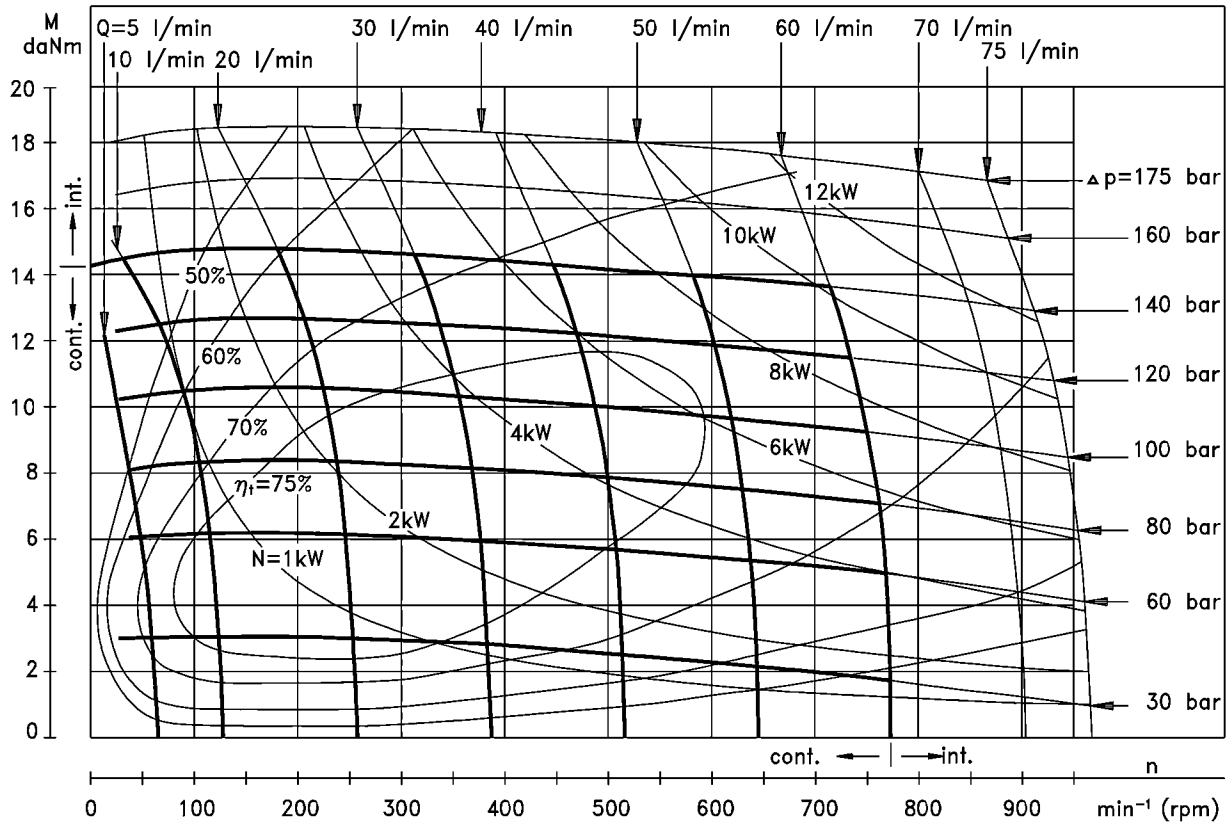


OP 100

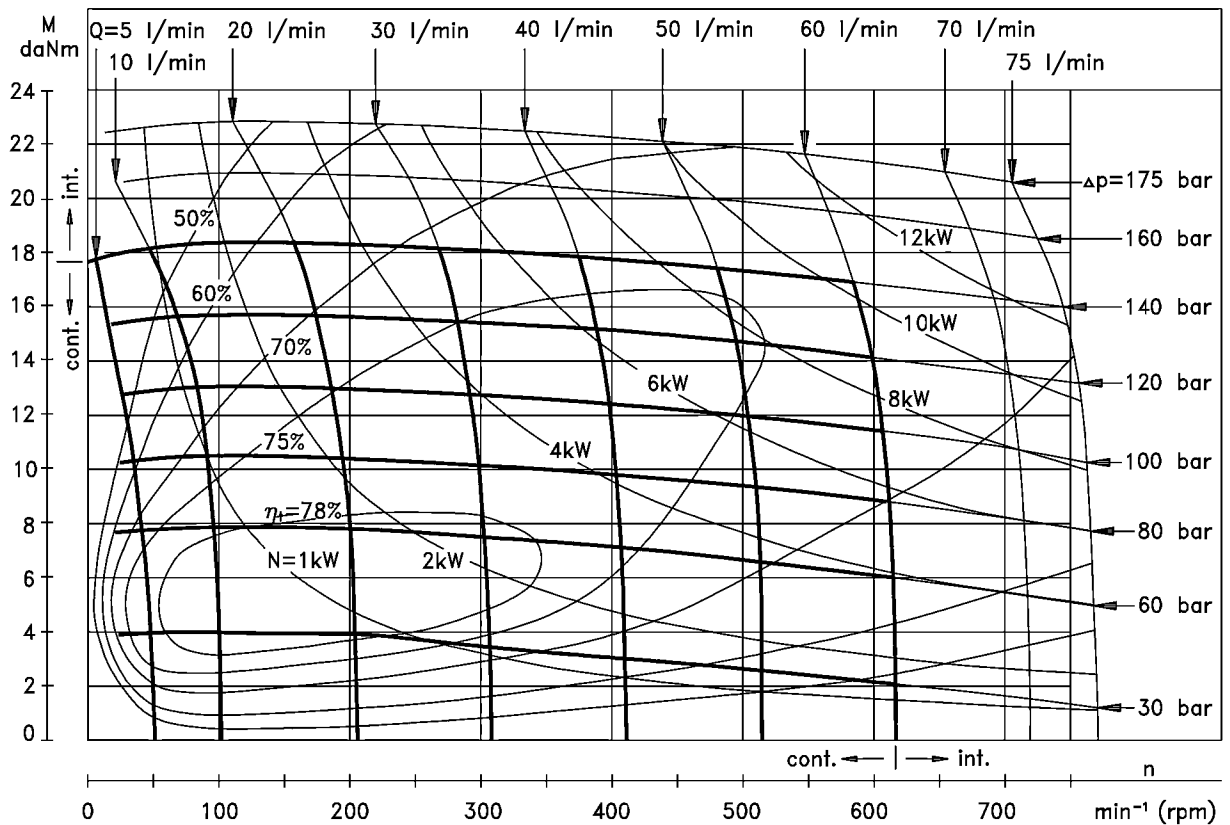


The function diagrams data was collected at back pressure 5+10 bar and oil with viscosity of 32 mm^2/s at 50° C.

FUNCTION DIAGRAMS

OP 125

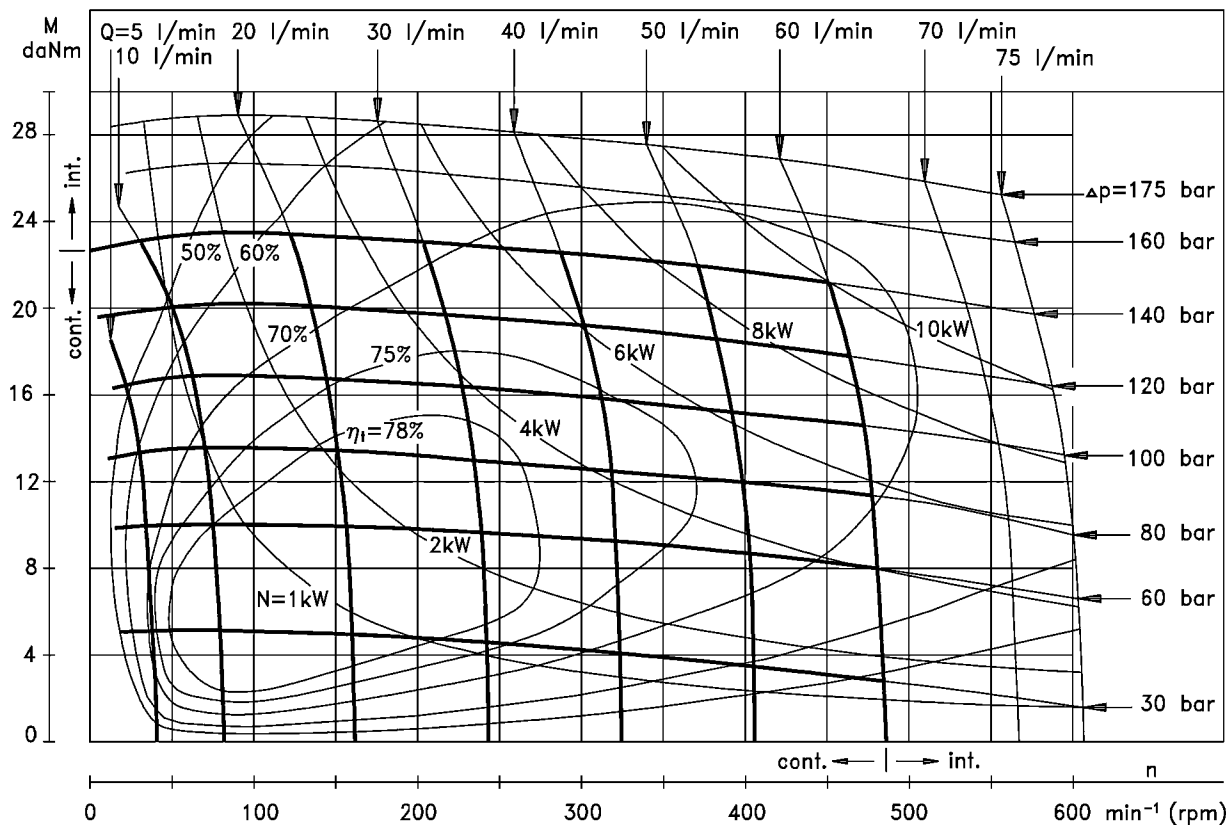


OP 160

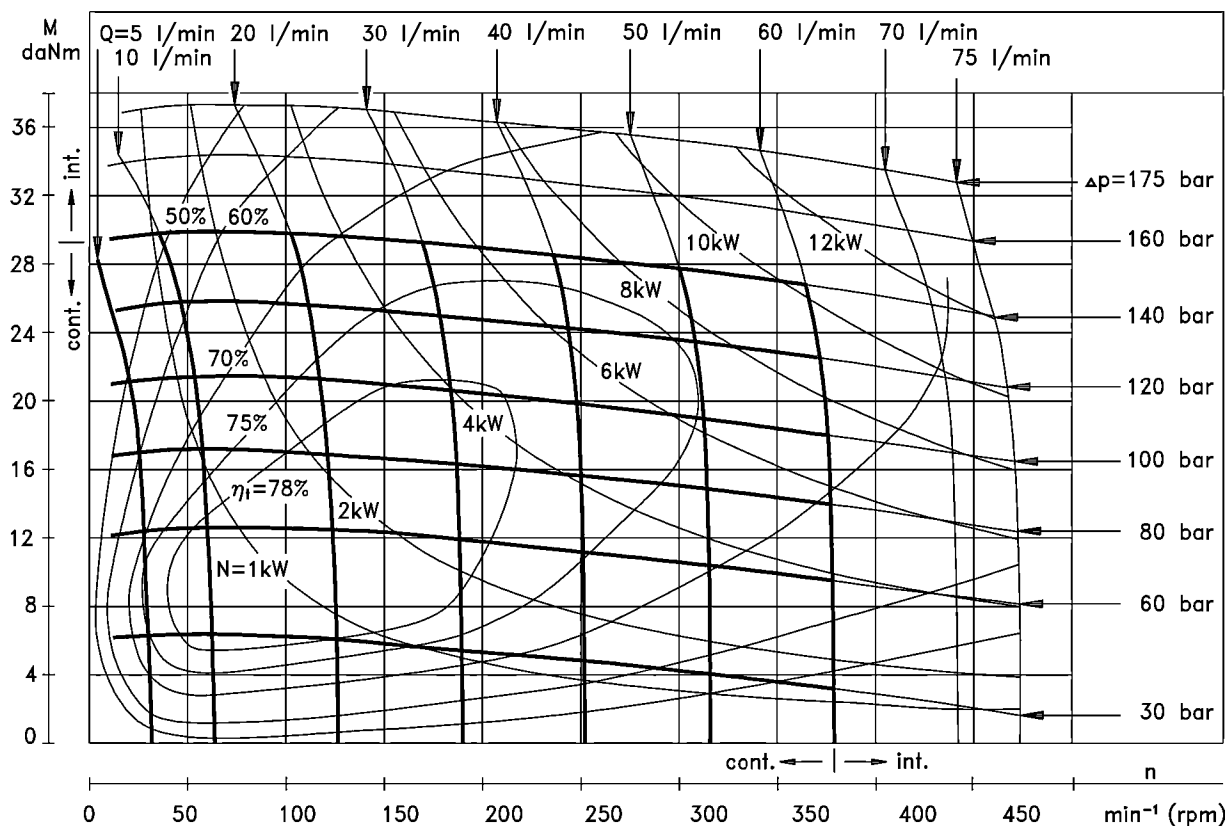


The function diagrams data was collected at back pressure 5÷10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OP 200

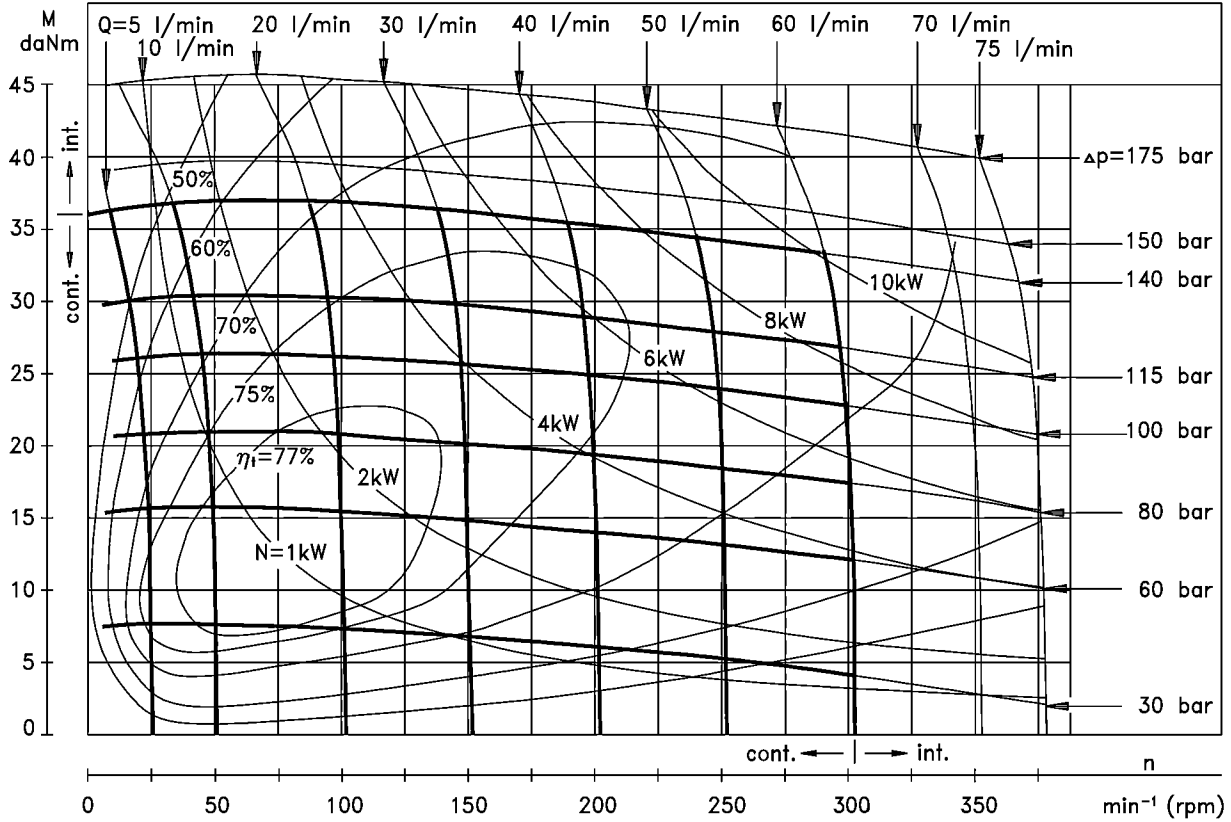


OP 250

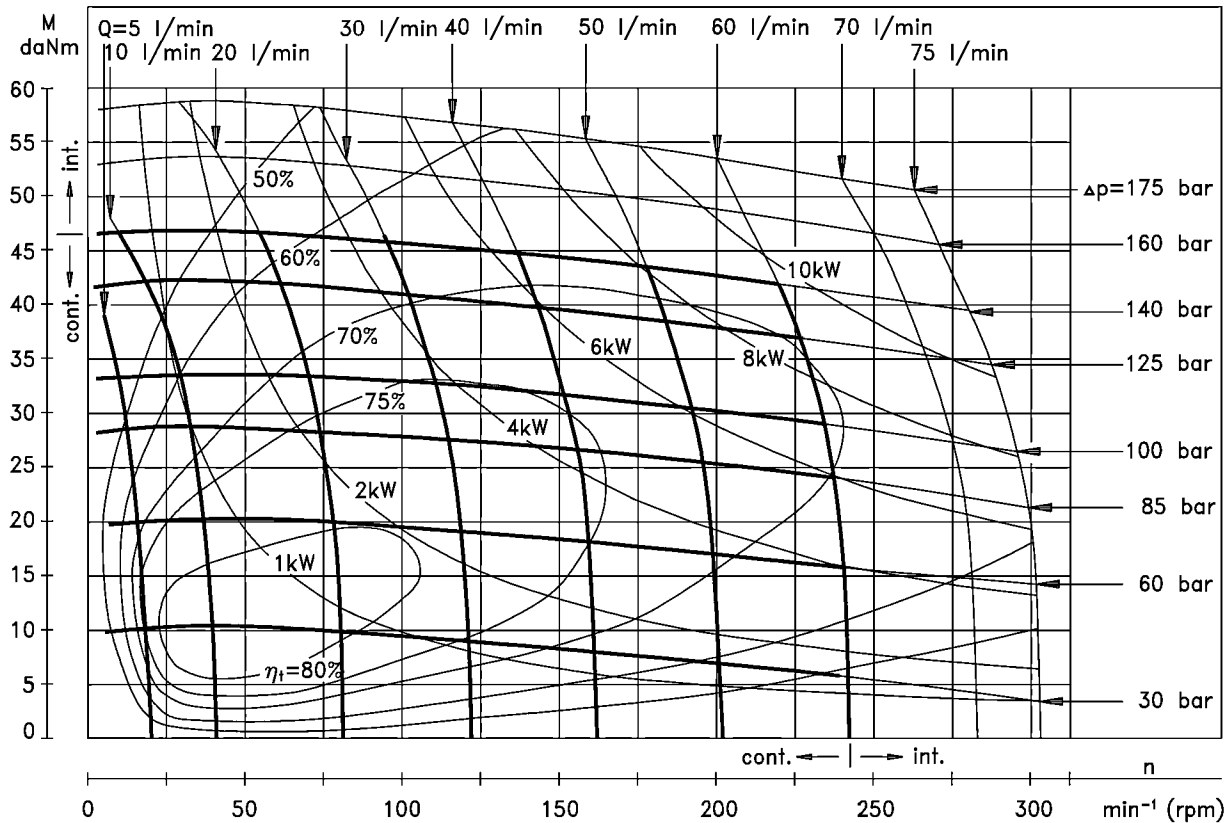


The function diagrams data was collected at back pressure $5 \div 10$ bar and oil with viscosity of $32 \text{ mm}^2/\text{s}$ at 50°C .

FUNCTION DIAGRAM

OP 315

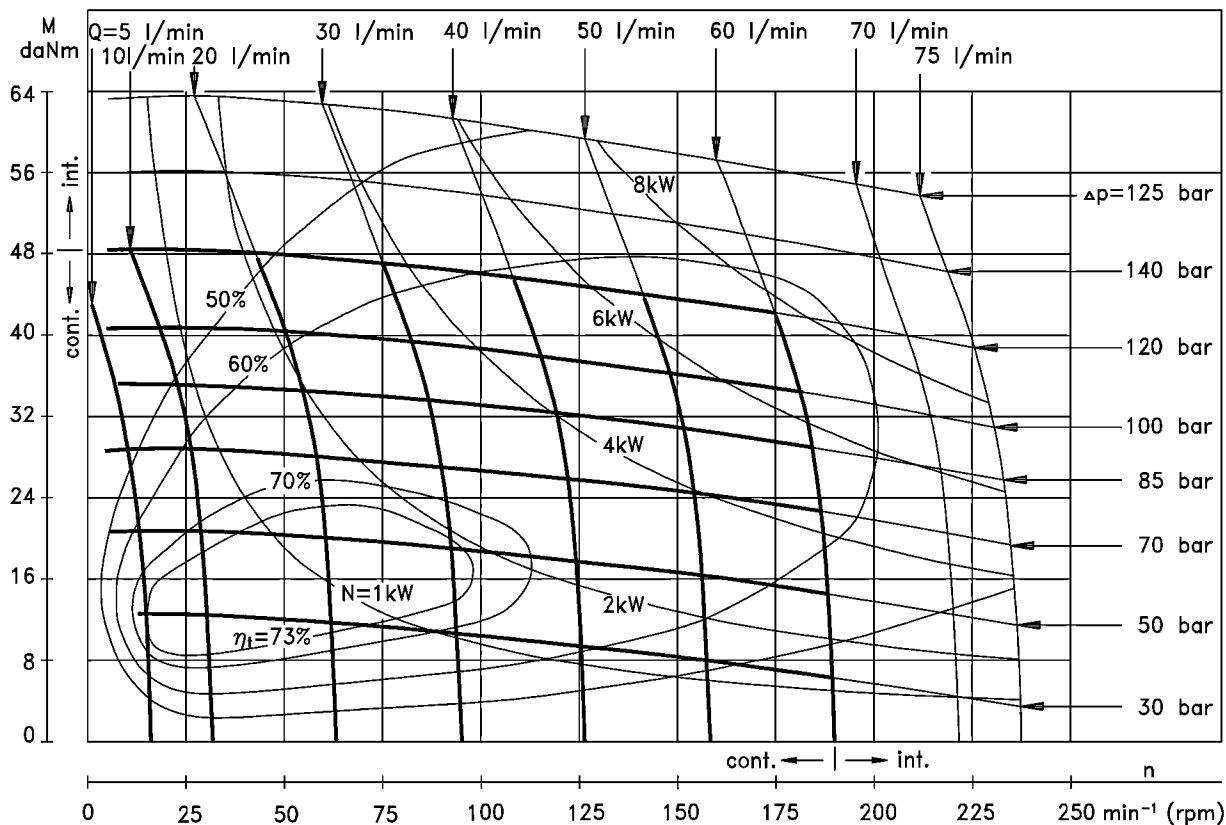


OP 400

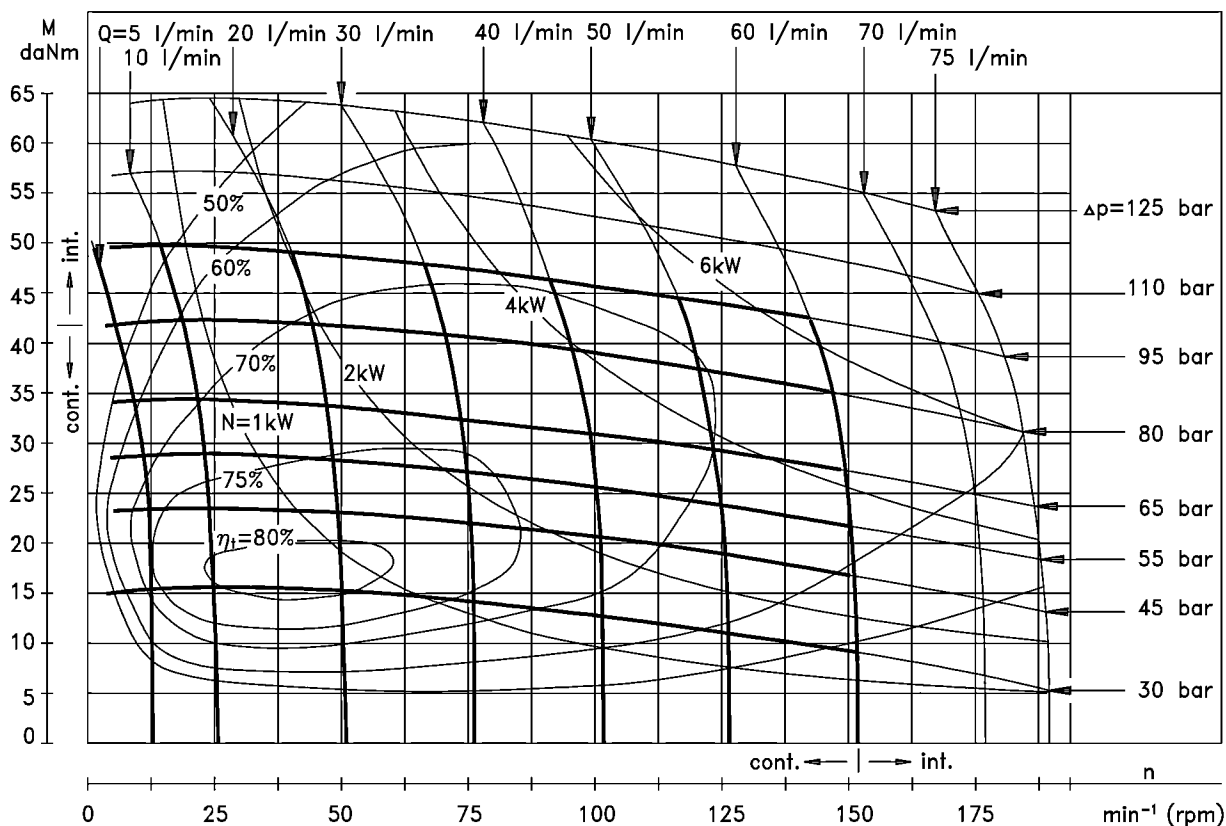


The function diagram data was collected at back pressure 5 ± 10 bar and oil with viscosity of $32 \text{ mm}^2/\text{s}$ at 50°C .

FUNCTION DIAGRAM

OP 500

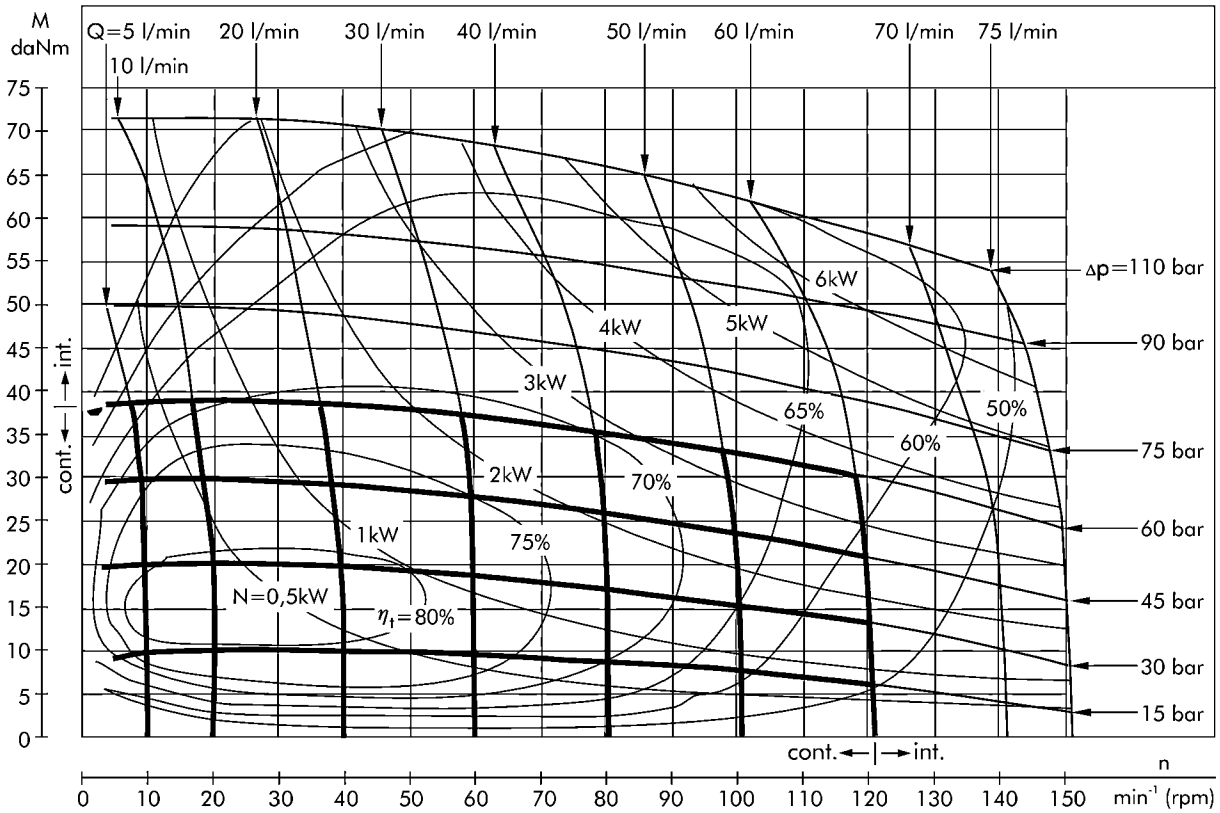


OP 630

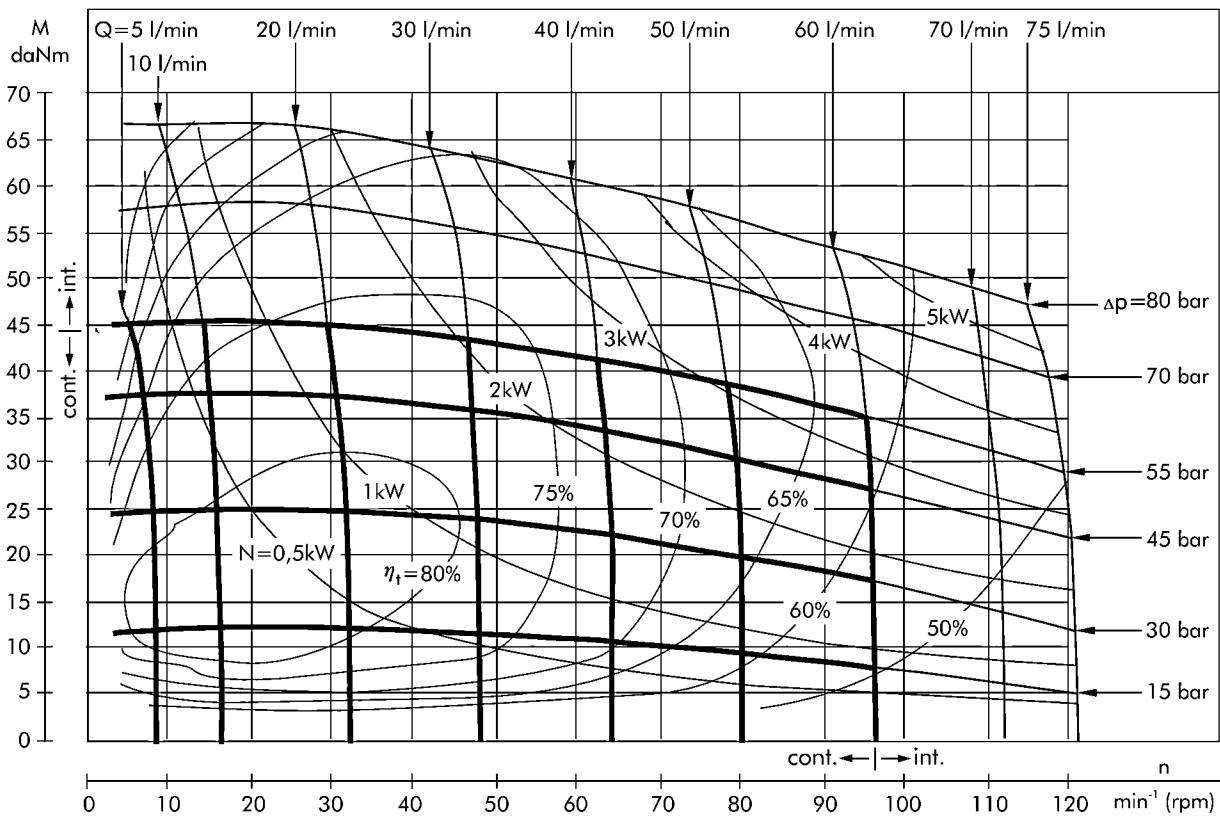

The function diagram data was collected at back pressure 5÷10 bar and oil with viscosity of 32 mm²/s at 50° C.

DIMENSIONS AND MOUNTING DATA

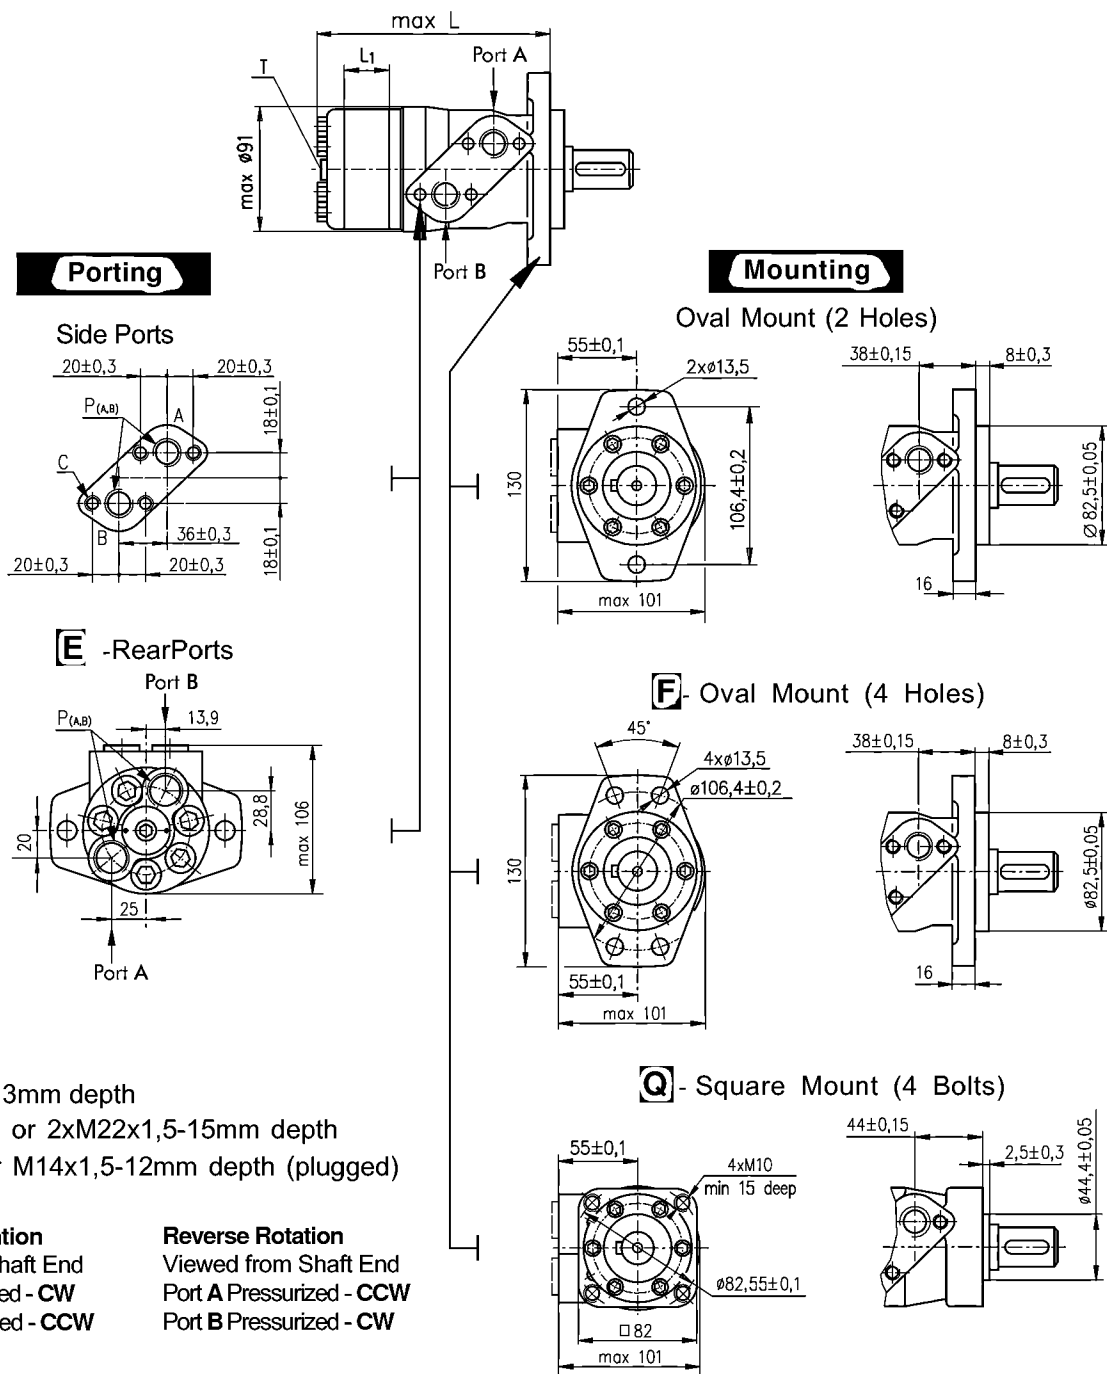

- C** : 4xM8-13mm depth
- P_(A,B)** : 2xG1/2 or 2xM22x1,5-15mm depth
- T** : G1/4 or M14x1,5-12mm depth (plugged)


Standard Rotation
 Viewed from Shaft End
 Port **A** Pressurized - **CW**
 Port **B** Pressurized - **CCW**

Reverse Rotation
 Viewed from Shaft End
 Port **A** Pressurized - **CCW**
 Port **B** Pressurized - **CW**

Type	L,mm	Type	L,mm	Type	L,mm	Type	L,mm	L ₁ , mm
OPF 25	133,2	OPQ 25	139,4	OP(F)E 25	151,2	OPQE 25	157,4	4,60
OPF 32	134,5	OPQ 32	140,7	OP(F)E 32	152,5	OPQE 32	158,7	5,90
OPF 40	135,2	OPQ 40	141,4	OP(F)E 40	153,2	OPQE 40	159,4	7,40
OPF 50	135,6	OPQ 50	141,8	OP(F)E 50	155,8	OPQE 50	162,0	6,67
OPF 80	139,6	OPQ 80	145,8	OP(F)E 80	159,8	OPQE 80	166,0	10,67
OPF 100	142,2	OPQ 100	148,4	OP(F)E 100	162,4	OPQE 100	168,6	13,33
OPF 125	145,6	OPQ 125	151,8	OP(F)E 125	165,8	OPQE 125	172,0	16,67
OPF 160	150,2	OPQ 160	156,4	OP(F)E 160	170,4	OPQE 160	176,6	21,33
OPF 200	155,6	OPQ 200	161,8	OP(F)E 200	175,8	OPQE 200	182,0	26,67
OPF 250	162,2	OPQ 250	168,4	OP(F)E 250	182,4	OPQE 250	188,6	33,33
OPF 315	171,6	OPQ 315	177,8	OP(F)E 315	191,8	OPQE 315	198,0	42,67
OPF 400	182,2	OPQ 400	188,4	OP(F)E 400	202,4	OPQE 400	208,6	53,33
OPF 500	193,0	OPQ 500	199,0	OP(F)E 500	213,0	OPQE 500	219,0	66,63
OPF 630	210,5	OPQ 630	216,5	OP(F)E 630	230,5	OPQE 630	236,5	84,00

DIMENSIONS AND MOUNTING DATA - OPW

W - Wheel Mount

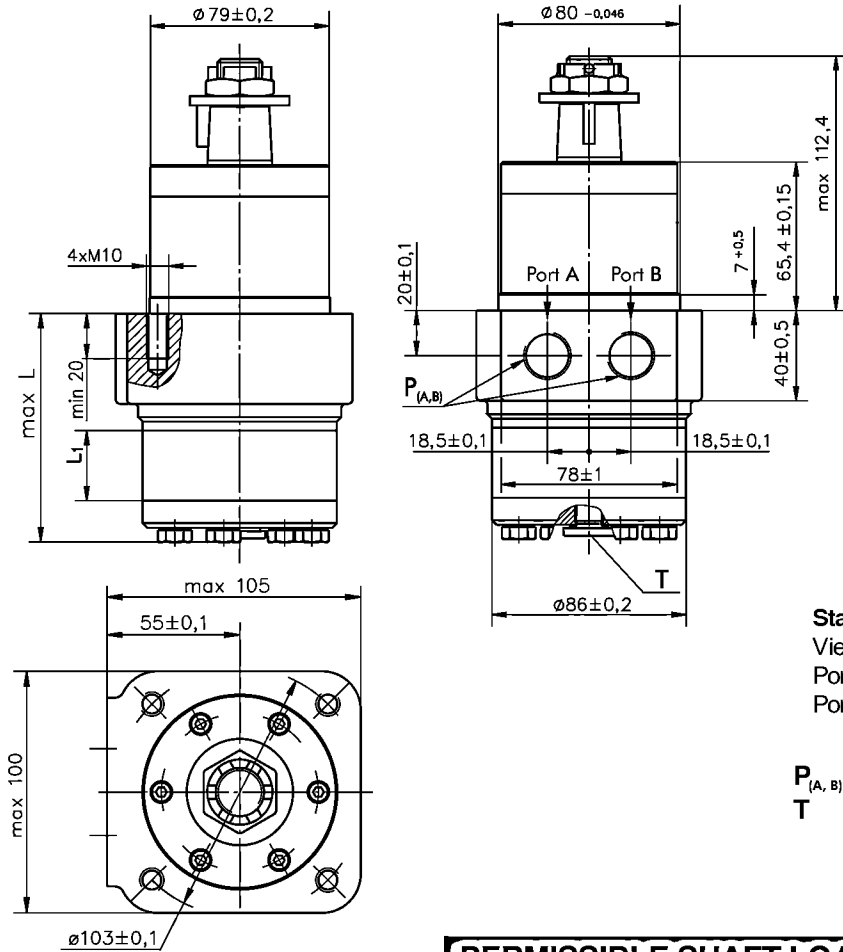

Type	L, mm	L ₁ , mm
OPW(N) 25	76,5	4,6
OPW(N) 32	78,0	5,9
OPW(N) 40	79,5	7,4
OPW(N) 50	78,0	6,67
OPW(N) 80	82,0	10,67
OPW(N) 100	85,0	13,33
OPW(N) 125	88,0	16,67
OPW(N) 160	93,0	21,33
OPW(N) 200	98,0	26,67
OPW(N) 250	105,0	33,33
OPW(N) 315	114,0	42,67
OPW(N) 400	125,0	53,33



Standard Rotation Viewed from Shaft End Port A Pressurized - CW Port B Pressurized - CCW	Reverse Rotation Viewed from Shaft End Port A Pressurized - CCW Port B Pressurized - CW
--	---

P_(A, B): 2xG1/2 or 2xM22x1,5 - 15 mm depth
T : G1/4 or M14x1,5 - 12 mm depth (plugged)

PERMISSIBLE SHAFT LOADS


OPWN

OPW

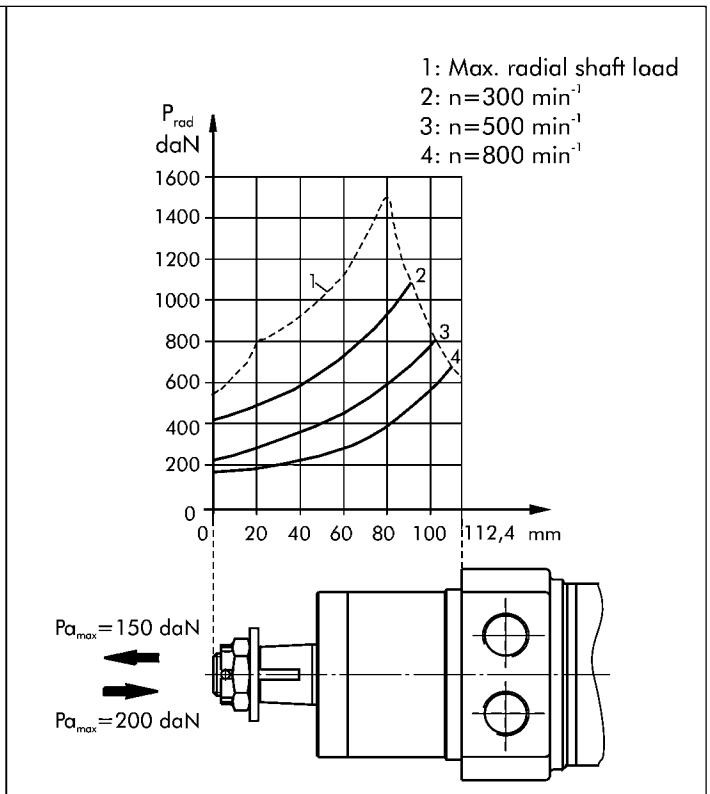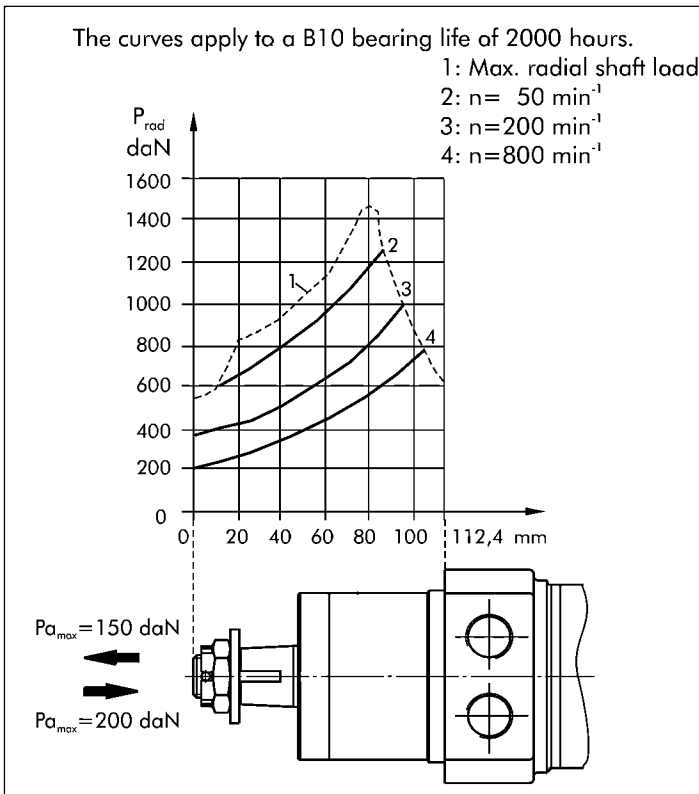


SHAFT EXTENSIONS FOR OP AND OR MOTORS


C - $\varnothing 25$ straight, Parallel key A8x7x32 DIN 6885
Max. Torque 44 daNm

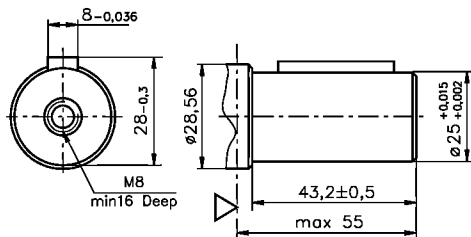


CB - $\varnothing 32$ straight, Parallel key A10x8x45 DIN 6885
Max. Torque 77 daNm

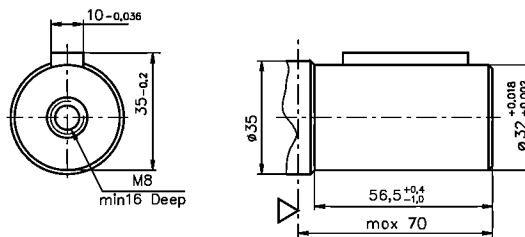


CO - $\varnothing 1"$ straight, Parallel key $1/4"x1/4"x1 1/4"$ BS46
Max. Torque 44 daNm

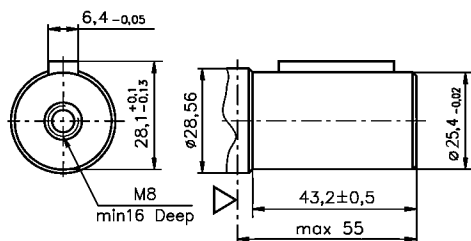


SB - splined A25x22xH10 DIN 5482
Max. Torque 44 daNm

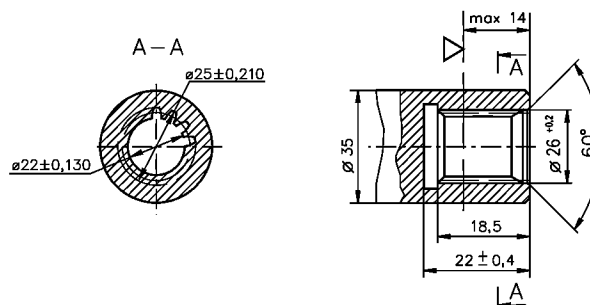


SH - splined, BS 2059 (SAE 6B)
Max. Torque 44 daNm

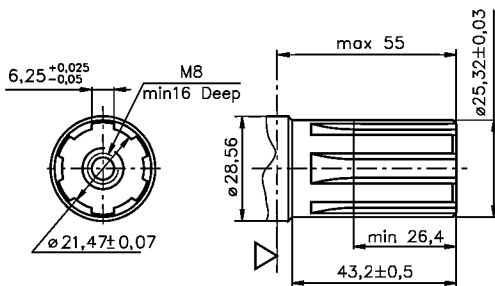


KB - tapered 1:10, Parallel key B6x6x20 DIN 6885
Max. Torque 77 daNm

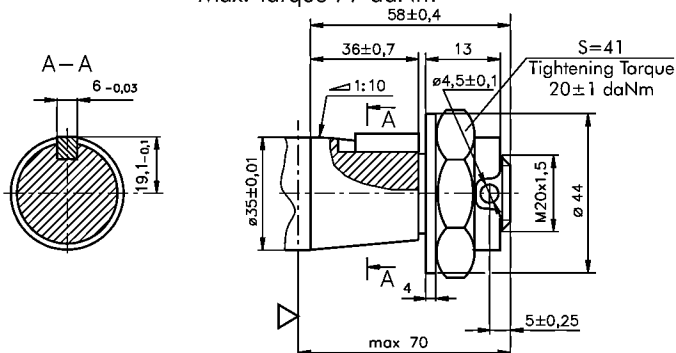


K - tapered 1:10, Parallel key B5x5x14 DIN 6885
Max. Torque 40 daNm

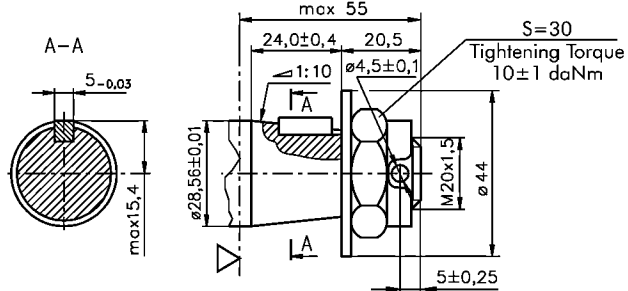


OB - tapered 1:8 SAEJ 501, Parallel key $5/16"x5/16"x1 1/4"$ BS46
Max. Torque 77 daNm

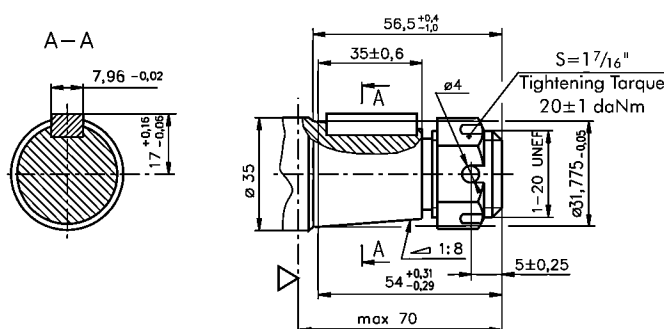

SA - splined, B25x22h9 DIN 5482
Max. Torque 40 daNm

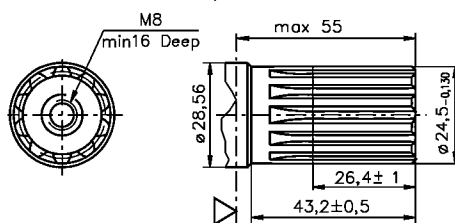

HB - $\varnothing 1 1/4"$ splined 14T, ANSI B92.1-1976 Norm
Max. Torque 77 daNm

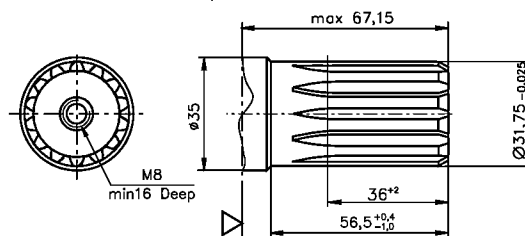

∇ - Motor Mounting Surface

PERMISSIBLE SHAFT LOADS FOR OP MOTORS

The permissible radial shaft load P_{rad} depends on the speed (RPM) and distance (L) from the point of load to the mounting flange.

Mounting Flange			
Shaft Version	cylindrical - C, CO tapered - K, splined - SH	splined - HB cylindrical - CB	cylindrical - C, CO
Radial Shaft Load P_{rad}^*	$\frac{800}{n} \times \frac{25000}{95+L}$, daN	$\frac{800}{n} \times \frac{18750}{95+L}$, daN	$\frac{800}{n} \times \frac{25000}{101+L}$, daN

$n < 200 \text{ min}^{-1}$; max $P_{rad} = 800 \text{ daN}$



* $n \geq 200 \text{ min}^{-1}$; $L < 55 \text{ mm}$

OPN




OP

The curves apply to a B₁₀ bearing life of 2000 hours.

- 1: Max. radial shaft load
- 2: $n = 50 \text{ min}^{-1}$
- 3: $n = 200 \text{ min}^{-1}$
- 4: $n = 800 \text{ min}^{-1}$

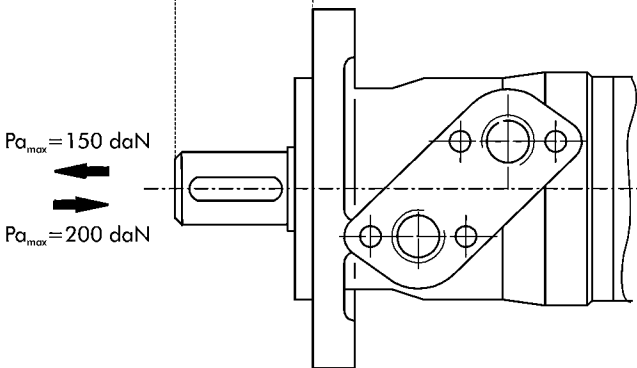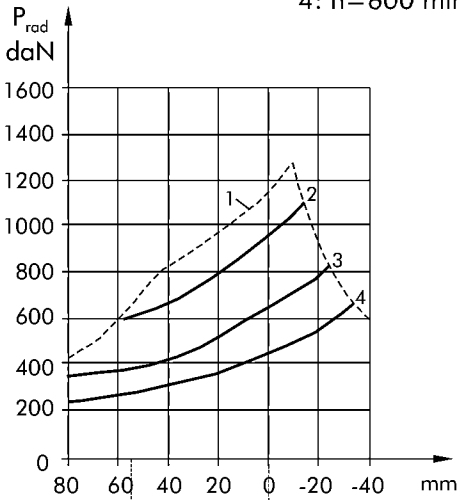


Radial Shaft Load P_{rad} for C, CO Shaft Extensions by $L = 30$ (24) mm

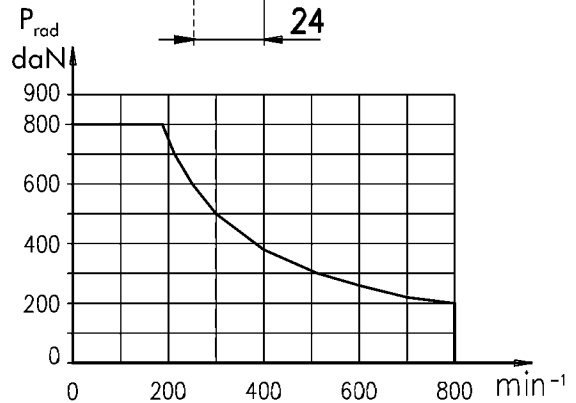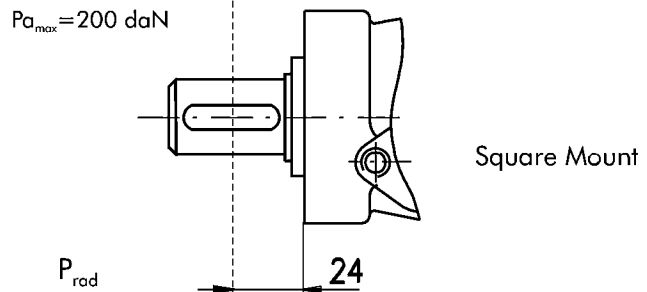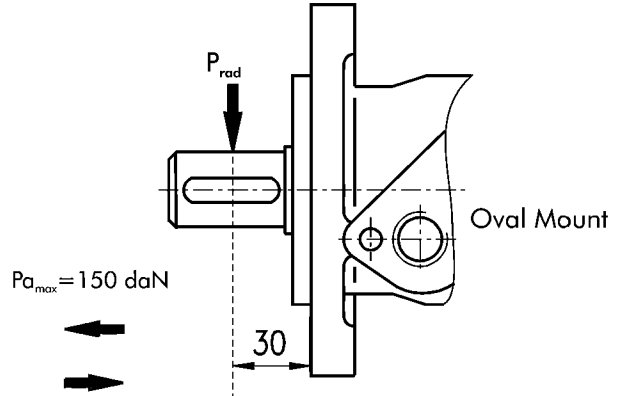

HYDRAULIC MOTORS WITH SPEED SENSOR TYPE OP...RS

MetaHydraulic is introducing hydraulic motor with a new generation of speed sensor. The electric output signal is a standard voltage signal that can be used for regulating the speed of a motor.

The speed is measured by a sensor in accordance with the Hall principle. Signal processing and amplification are performed in the sensor housing. A connection is provided in the housing by a Plug connector M12 Series.

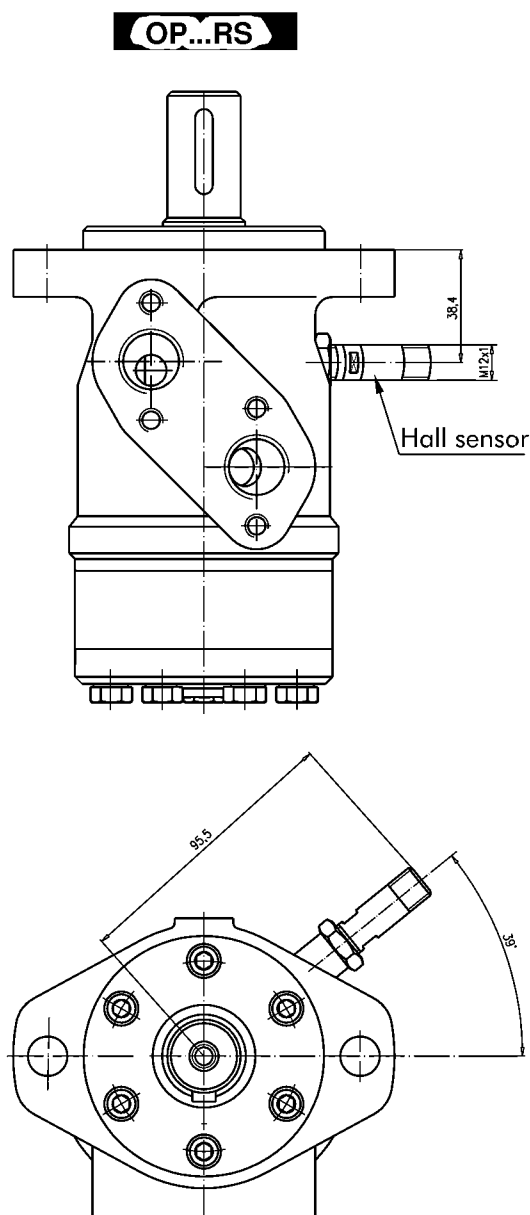

This performance is applicable for all motors of OP and OR series. The main technical features correspond to the standard motor series OP and OR.


For detail technical and mounting data please refer to Meta catalogue.

DIFFERENTIAL HALL SENSOR

Technical data

Frequency range	3...20 000 Hz
Output	PNP
Power supply	10...36 VDC
Current input	20 mA (@24 VDC)
Current load	500 mA (@24 VDC;24°C)
Ambient Temperature	minus 40... plus 125°C
Protection	IP 67
Plug connector	M12-Series
Mounting principle	ISO 6149


Output signal

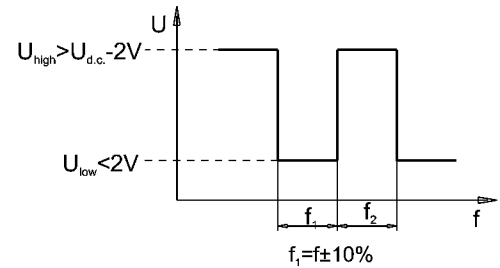


Load max.: $I_{high} = I_{low} < 50\text{mA}$

No load current, max: 20 mA

Wiring diagram

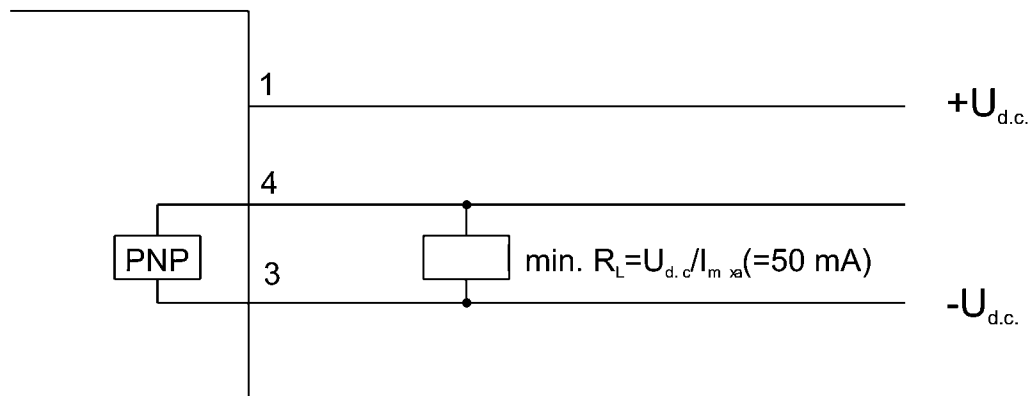

Stik type



Terminal No.	Connection
1	$U_{d.c.}$ (+supply)
2	No connection
3	$U_{d.c.}$ (-supply)
4	Output signal

ORDER CODE

	1	2	3	4	5	6	7	8	9	10	11	12
OP												

Pos.1 - Shaft Seal Version (see page OR-10)

- omit - Low pressure seal or Seal for "...B" shaft
D - High pressure seal not for "...B" shaft

Pos.2 - Case Drain

- omit - with drain port
U - without drain port

Pos.3 - Mounting Flange

- omit - Oval mount, two holes
F - Oval mount, four holes
Q - Square mount, four bolts
W - Wheel mount

Pos.4 - Option (needle bearings)

- omit - none
N* - with needle bearings

Pos.5 - Port type

- omit - Side ports
E - Rear ports

Pos.6 - Displacement code

- | | |
|------------|--------------------------------|
| 25* | - 25,0 [cm ³ /rev] |
| 32* | - 32,0 [cm ³ /rev] |
| 40* | - 40,0 [cm ³ /rev] |
| 50 | - 49,5 [cm ³ /rev] |
| 80 | - 79,2 [cm ³ /rev] |
| 100 | - 99,0 [cm ³ /rev] |
| 125 | - 123,8 [cm ³ /rev] |
| 160 | - 158,4 [cm ³ /rev] |
| 200 | - 198,0 [cm ³ /rev] |
| 250 | - 247,5 [cm ³ /rev] |
| 315 | - 316,8 [cm ³ /rev] |
| 400 | - 396,0 [cm ³ /rev] |
| 500 | - 495,0 [cm ³ /rev] |
| 630 | - 623,6 [cm ³ /rev] |

Pos.7 - Shaft Extensions** (see page OP - 13)

- C** - ø25 straight, Parallel key A8x7x32 DIN6885
VC - ø25 straight, Parallel key A8x7x32 DIN6885 with corrosion resistant bushing
CO - ø1" straight, Parallel key ¼"x¼"x1¼" BS46
VCO - ø1" straight, Parallel key ¼"x¼"x1¼" BS46 with corrosion resistant bushing
SH - ø25,32 splined BS 2059 (SAE 6B)
VSH - ø25,32 splined BS 2059 (SAE 6B) with corrosion resistant bushing
K - ø28,56 tapered 1:10, Parallel key B5x5x14 DIN6885
SA - ø24,5 splined B 25x22 DIN 5482
VSA - ø24,5 splined B 25x22 DIN 5482 with corrosion resistant bushing
CB - ø32 straight, Parallel key A10x8x45 DIN6885
KB - ø35 tapered 1:10, Parallel key B6x6x20 DIN6885
SB - splined A 25x22 DIN 5482
OB - ø1¼" tapered 1:8, Parallel key ⅝"x ⅝"x1¼" BS46
HB - ø1¼" splined 14T ANSI B92.1 - 1976

Pos.8 - Ports

- omit - BSPP (ISO 228)
M - Metric (ISO 262)

Pos.9 - Special Features (see Specification data on page OP - 05)

- omit - none
LL - Low Leakage
LSV - Low Speed Valve
FR - Free Running

Pos.10 - Rotation

- omit - Standard Rotation
R - Reverse Rotation

Pos.11 - Option (Paint)***

- omit - no Paint
P - Painted
PC - Corrosion Protected Paint

Pos.12 - Speed Monitoring

- omit - none
RS-P - with speed sensor (PNP pull-down resistor)
RS-N - with speed sensor (NPN pull-up resistor)

NOTES:

* Only with "D" Shaft Seal Versions!

** The permissible output torque for shafts must be not exceeded!

The following combinations are not allowed- **Q, W, N** options with "...B" shafts

***Color at customer's request.

The hydraulic motors are manganophosphatized as standard.


LOW SPEED HIGH TORQUE MOTORS OP.../NA

INTRODUCTION

Meta Hydraulic presents the new hydraulic motor OP.../NA, which is modification of the hydraulic motor type OP. Dimension and pressure range are same as OP hydraulic motor.


OP.../NA is suitable for driven mechanism where is demand smooth operation low speed and high pressure. It is designed with separated output shaft and spool valve and can be specified with low internal leakage, thereby:

- Good start-up characteristics;
- Precise control of the Torque at low small flow.
- Smooth operation at high pressure and small oil flow;
- High volumetric efficiency.



APPLICATION

- Actuator motor as driving-motor for steering mechanism of the the three-wheel vehicles;
- For conveyors (series connection);
- Dosing motor etc.

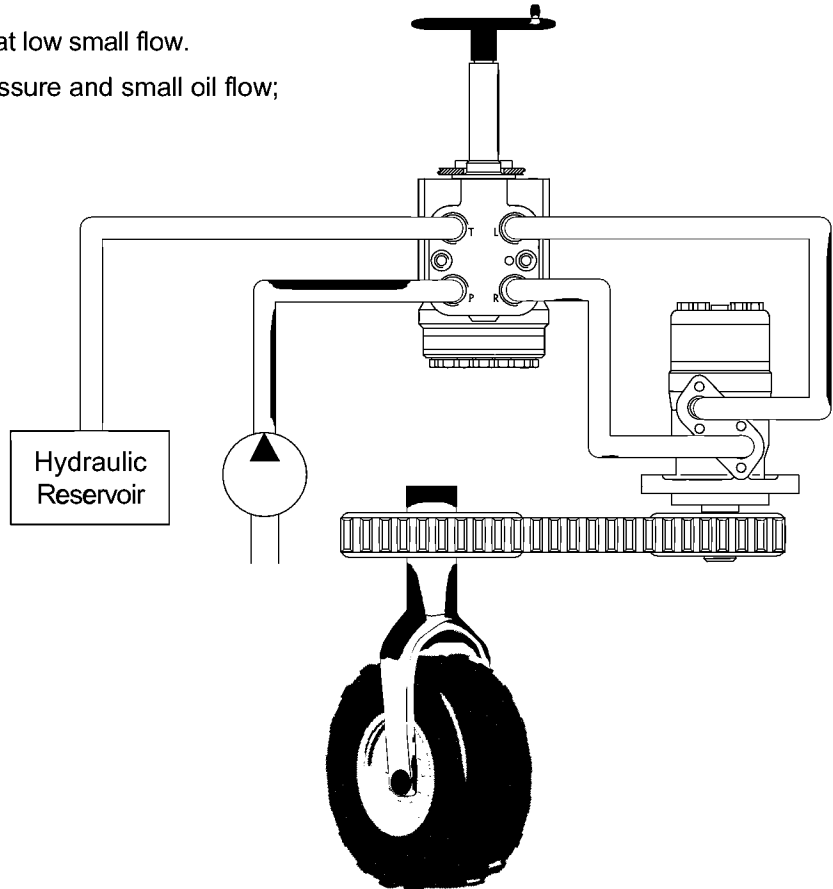

SPECIFICATION DATA

Code	Displacement [cm ³ /rev]	Max. Speed [RPM]	Max. Torque [daNm]		Max. Output [kW]		Max. Pressure Drop [bar]		Max. Oil Flow [lpm]
		cont.	cont.	int*	cont.	int*	cont.	int*	
OP50/NA	49,5	200	9,4	11,9	1,5	2,0	140	175	10
OP80/NA	79,2	200	15,1	19,5	2,5	3,0	140	175	16
OP100/NA	99,0	200	19,3	23,7	4,0	4,5	140	175	20
OP125/NA	123,8	200	23,7	29,8	5,0	5,5	140	175	25
OP160/NA	158,4	200	26,4	37,8	4,5	5,5	120	175	32
OP200/NA	198,0	200	30,0	36,5	5,0	6,5	115	140	40
OP250/NA	247,5	200	33,0	40,5	5,5	6,0	100	125	50
OP315/NA	316,8	190	34,7	40,2	5,5	6,0	85	100	60
OP400/NA	396,0	15	33,5	41,0	4,5	6,0	65	80	60

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

ORDER CODE

	1	2	3	4	5	6
OP						NA

Pos.1 - Displacement code

50	- 49,5 [cm ³ /rev]
80	- 79,2 [cm ³ /rev]
100	- 99,0 [cm ³ /rev]
125	- 123,8 [cm ³ /rev]
160	- 158,4 [cm ³ /rev]
200	- 198,0 [cm ³ /rev]
250	- 247,5 [cm ³ /rev]
315	- 316,8 [cm ³ /rev]
400	- 398,0 [cm ³ /rev]

Pos.2 - Shaft Extensions*

C	- ø25 straight, Parallel key A8x7x32 DIN6885
CO	- ø1" straight, Parallel key ¼"x¼"x¼" BS46
SH	- ø28,32 splined BS 2059 (SAE 6B)
K	- ø28,56 tapered 1:10, Parallel key, B5x5x14 DIN6885
SA	- ø24,5 splined B25x22h9 DIN 5482

Pos.3 - Ports

omit - BSPP (ISO 228)
M - Metric (ISO 262)

Pos.4 - Rotation

omit - Standard Rotation
R - Reverse Rotation

Pos. 5 - Option (Paint)**

omit - no Paint
P - Painted
PC - Corrosion Protected Paint

Pos.6 - Design Series

NA - Low speed, high pressure


NOTES:

* The permissible output torque for shafts must be not exceeded!

** Color at customer's request.


The hydraulic motors are mangano phosphatized as standard.

LOW SPEED HIGH TORQUE MOTORS OZ



INTRODUCTION

OZ Series have a spool valve: the distribution valve is integrated in the output shaft. The cardan shaft thus rotates the distribution valve and transfers mechanical energy from the gerotor set to the output shaft.




SPECIFICATION DATA

Code	Displacement [cm ³ /rev]	Max. Speed [RPM]	Max. Torque [daNm]		Max. Output [kW]		Max. Pressure Drop [bar]		Max. Oil Flow [lpm]
		cont.	cont.	int*	cont.	int*	cont.	int*	cont.
OZ 50	49,5	808	7	9,2	5,2	8,6	105	140	40
OZ 80	79,2	505	10,8	14,6	5,2	8,6	105	140	40
OZ 100	99	404	14,4	18,3	5,2	8,6	105	140	40
OZ 125	123,8	232	17	22,9	5,2	8,6	105	140	40
OZ 160	158,4	252	22	29,3	5,2	8,6	105	140	40
OZ 200	198	202	27,5	36,6	5,2	8,6	105	140	40
OZ 250	247,5	160	30,1	37,6	4,6	7,0	90	115	40
OZ 315	316,8	126	31,7	44,0	3,4	5,8	70	105	40
OZ 400	369	100	40,8	55,6	3,4	5,8	70	105	40

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

OUTLINE DIMENSIONS REFERENCE

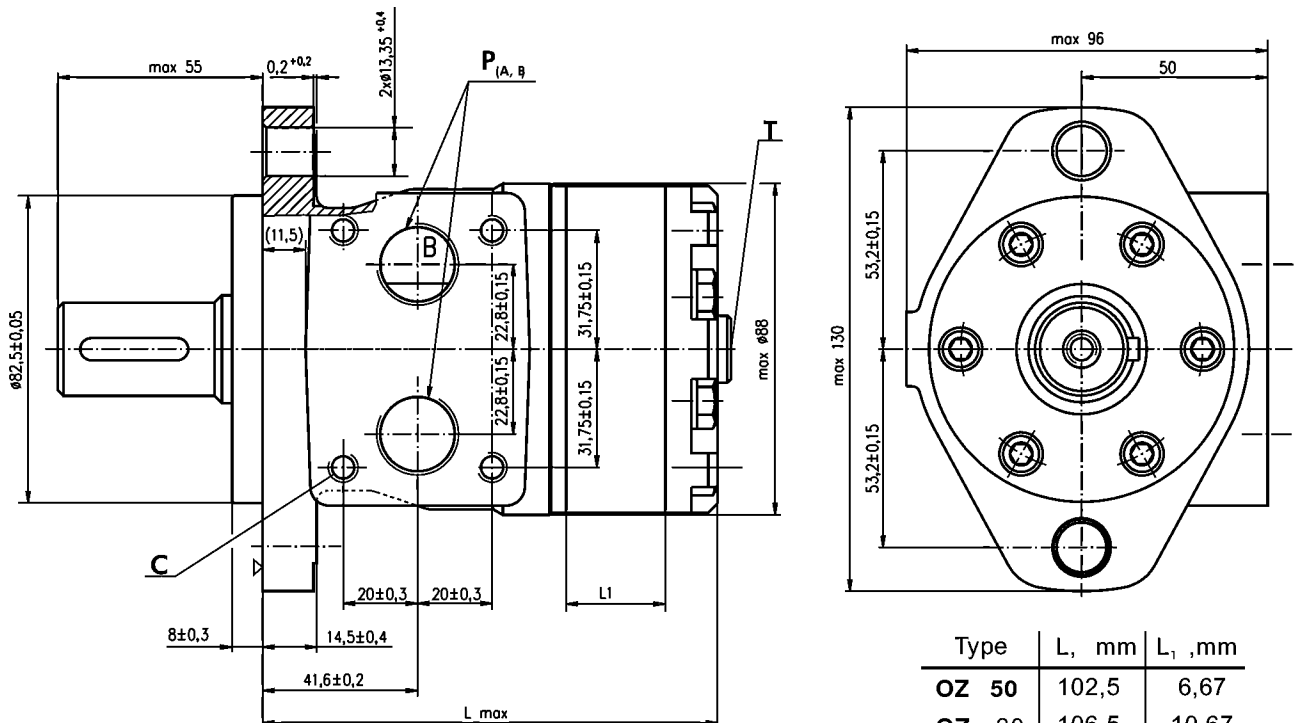

- C : 2xM8-13mm depth
- P_(A, B): 2xG1/2 - 15 mm depth
- T : G1/4 - 12 mm depth (plugged)


Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW

Type	L, mm	L ₁ , mm
OZ 50	102,5	6,67
OZ 80	106,5	10,67
OZ 100	109	13,33
OZ 125	112,5	16,67
OZ 160	117	21,33
OZ 200	122,5	26,67
OZ 250	129	33,33
OZ 300	138,5	42,67
OZ 400	149	53,33

SHAFT EXTENSIONS


C

ø25 straight, Parallel key A8x7x32 DIN 6885
Max. Torque 44 daNm

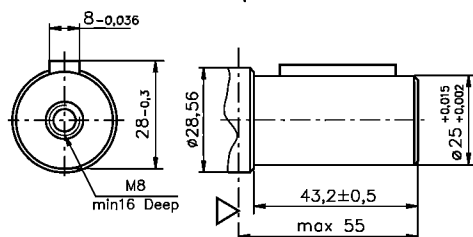


CO

ø25,4 straight, Parallel key 1/4"x1/4"x1 1/4" BS46
Max. Torque 44 daNm

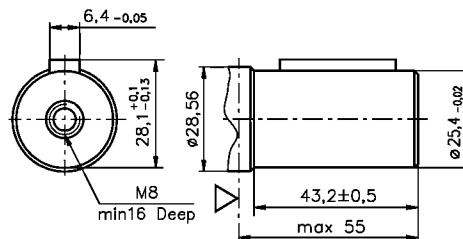


SH

ø28,56 Splined, BS 2059 (SAE 6B)
Max. Torque 44 daNm

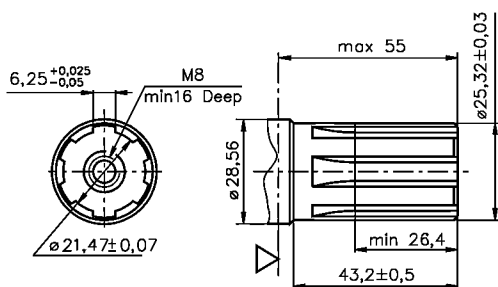


K

ø28,56; Tapered 1:10 Parallel key B5x5x14 DIN 6885
Max. Torque 44 daNm

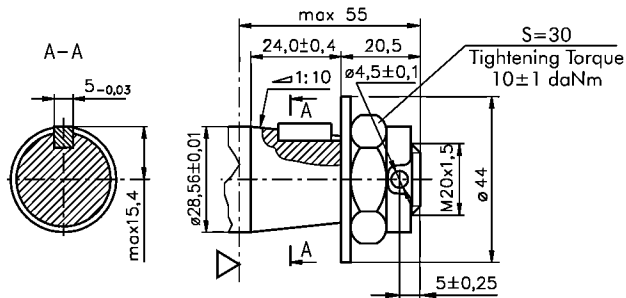

SA

ø28,56 Splined, B25x22h9 DIN 5482
Max. Torque 44 daNm

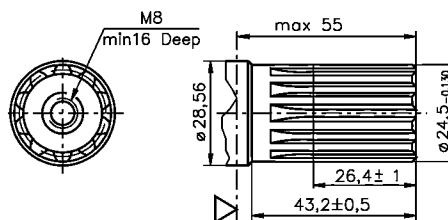

▽ - Motor Mounting Surface

ORDER CODE

1 2 3 4 5 6 7

OZ

Pos. 1 - Displacement

50	- 49,5 [cm ³ /rev]
80	- 79,2 [cm ³ /rev]
100	- 99,0 [cm ³ /rev]
125	- 123,8 [cm ³ /rev]
160	- 158,4 [cm ³ /rev]
200	- 198,0 [cm ³ /rev]
250	- 247,5 [cm ³ /rev]
315	- 316,8 [cm ³ /rev]
400	- 398,0 [cm ³ /rev]

Pos. 2 - Shaft Extensions*

C	- ø25 straight, Parallel key A8x7x32 DIN6885
CO	- ø25 straight, Parallel key 1/4"x1/4"x1 1/4" BS46
SH	- ø28,56 splined BS 2059 (SAE 6B)
K	- ø28,56 tapered 1:10, Parallel key, B5x5x14 DIN6885
SA	- ø28,56 splined B25x22h9 DIN 5482

Pos. 3 - Ports

omit - BSPP (ISO 228)
M - Metric (ISO 262)

Pos. 4 - Rotation

omit - Standard Rotation
R - Reverse Rotation

Pos. 5 - Option (Paint)**

omit - no Paint
P - Painted Low Gloss Color
PC - Corrosion Protected Paint

Pos. 6 - Special Features

omit - none
FR - Free Running

Pos. 6 - Design Series

omit - Factory specified

NOTES:

* The permissible output torque for shafts must be not exceeded!


** Color at customer's request.

HYDRAULIC MOTORS OR



APPLICATION

- » Conveyors;
- » Feeding mechanism of robots and manipulators;
- » Metal working machines;
- » Textile machines;
- » Machines for agriculture;
- » Food industries;
- » Grass cutting machinery etc.



CONTENTS

Specification dataOR-02+05
 Function diagramsOR-06+10
 Permissible shaft Seal Pressure ... OR-10
 Dimensions and mounting OR-11
 Wheel motor OR-12
 Shaft versions OR-13
 Permissible shaft loads OR-14
 Order code OR-17

OPTIONS

- » Model- Spool valve, roll-gerotor;
- » Flange and wheel mount;
- » Motor with needle bearing;
- » Side and rear ports;
- » Shafts- straight, splined and tapered;
- » Shaft seal for high and low pressure;
- » Metric and BSPP ports;
- » Other special features.


GENERAL

Displacement,	[cm ³ /rev.]	51,5 ÷ 397
Max. Speed,	[RPM]	775 ÷ 150
Max. Torque,	[daNm]	10,1 ÷ 61
Max. Output,	[kW]	5 ÷ 13
Max. Pressure Drop,	[bar]	175 ÷ 70
Max. Oil Flow,	[l/min]	40 ÷ 60
Min. Speed,	[RPM]	10
Pressure fluid		Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range,	[°C]	-30 ÷ 90
Optimal Viscosity range,	[mm ² /s]	20 ÷ 75
Filtration		ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

Oil flow in drain line

Pressure drop (bar)	Viscosity (mm ² /s)	Oil flow in drain line (l/min)
100	20	2,5
	35	1,8
140	20	3,5
	35	2,8

Pressure Losses

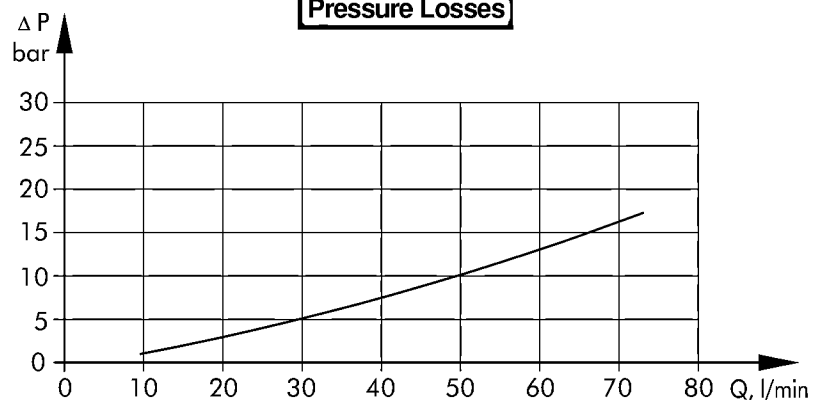

SPECIFICATION DATA

Type	OR 50	ORW 50 OR 50...B	OR 80	ORW 80 OR 80...B	OR 100	ORW 100 OR 100...B	
Displacement, [cm³/u]	51,5	51,5	80,3	80,3	99,8	99,8	
Max. Speed, [RPM]	cont.	775	775	750	750	600	600
	int.*	970	970	940	940	750	750
Max. Torque [daNm]	cont.	10,1	10,1	19,5	19,5	24	24
	int.*	13	13	22	22	28	28
	peak**	17	17	27	27	32	32
Max. Output, [kW]	cont.	7	7	12,5	12,5	13	13
	int.*	8,5	8,5	15	15	15	15
Max. Pressure Drop [bar]	cont.	140	140	175	175	175	175
	int.*	175	175	200	200	200	200
	peak**	225	225	225	225	225	225
Max. Oil Flow [l/min]	cont.	40	40	60	60	60	60
	int.*	50	50	75	75	75	75
Max. Inlet Pressure [bar]	cont.	175	175	175	175	175	175
	int.*	200	200	200	200	200	200
	peak**	225	225	225	225	225	225
Max. Return Pressure w/o Drain Line or max. Pressure in Drain Line, [bar]	cont.0-100 RPM	150	100	150	100	150	100
	cont.100-300 RPM	75	30	75	30	75	30
	cont.300-600 RPM	50	15	50	15	50	15
	cont.>600 RPM	20	-	20	-	20	-
	int.* 0-max. RPM	150	100	150	100	150	100
Max. Return Pressure with Drain Line [bar]	cont.	175	175	175	175	175	175
	int.*	200	200	200	200	200	200
	peak**	225	225	225	225	225	225
Max. Starting Pressure with Unloaded Shaft, [bar]	10	10	10	10	10	10	
Min. Starting Torque [daNm]	at max. press.	8	8	15	15	20	20
	drop cont.						
	at max. press. drop int.*	10	10	17	17	23	23
Min. Speed***, [RPM]	10	10	10	10	10	10	
Weight, avg., [kg]	OR(F)	6,8	6,9	6,9	7,0	7,2	7,3
	ORW	-	10,4	-	10,5	-	10,6
	ORQ	6,2		6,3		6,6	

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% for every minute.

*** For speeds of 10 RPM or lower, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure drop must not occur simultaneously!
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommended using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 13 mm²/s at operating temperatures.
5. Recommended maximum system operating temperature - 82°C.
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 min.



SPECIFICATION DATA (continued)

Type	OR 125	ORW 125 OR 125...B	OR 160	ORW 160 OR 160...B	OR 200	ORW 200 OR 200...B	
Displacement, [cm³/u]	125,7	125,7	159,6	159,6	199,8	199,8	
Max. Speed, [RPM]	cont.	475	475	375	375	300	300
	int.*	600	600	470	470	375	375
Max. Torque [daNm]	cont.	30	30	39	39	38,5	45
	int.*	34	34	43	43	46	50
	peak**	37	37	46	46	56	56
Max. Output, [kW]	cont.	12,5	12,5	11,5	11,5	9	11
	int.*	14,5	14,5	14	14	11,5	13
Max. Pressure Drop [bar]	cont.	175	175	175	175	140	175
	int.*	200	200	200	200	175	200
	peak**	225	225	225	225	225	225
Max. Oil Flow [l/min]	cont.	60	60	60	60	60	60
	int.*	75	75	75	75	75	75
Max. Inlet Pressure [bar]	cont.	175	175	175	175	175	175
	int.*	200	200	200	200	200	200
	peak**	225	225	225	225	225	225
Max. Return Pressure w/o Drain Line or max. Pressure in Drain Line, [bar]	cont.0-100 RPM	150	100	150	100	150	100
	cont.100-300 RPM	75	30	75	30	75	30
	cont.300-600 RPM	50	15	50	15	50	15
	cont.>600 RPM	-	-	-	-	-	-
	int.* 0-max. RPM	150	100	150	100	150	100
Max. Return Pressure with Drain Line [bar]	cont.	175	175	175	175	175	175
	int.*	200	200	200	200	200	200
	peak**	225	225	225	225	225	225
Max. Starting Pressure with Unloaded Shaft, [bar]	9	9	7	7	5	5	
Min. Starting Torque [daNm]	at max. press.	25	25	32	32	33	41
	drop cont.						
	at max. press. drop int.*	28	28	37	37	40	46
Min. Speed***, [RPM]		10	10	10	10	10	10
Weight, avg., [kg]	OR(F)	7,3	7,4	7,5	7,6	8	8,1
	ORW	-	10,8	-	11,1	-	11,6
	ORQ	6,8		7,6		7,2	

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% for every minute.

*** For speeds of 10 RPM or lower, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure drop must not occur simultaneously!
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommended using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 13 mm²/s at operating temperatures.
5. Recommended maximum system operating temperature - 82°C.
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 min.

SPECIFICATION DATA (continued)

Type	OR 250	ORW 250 OR 250...B	OR 315	ORW 315 OR 315...B	OR 400	ORW 400 OR 400...B	
Displacement, [cm³/u]	250,1	250,1	315,7	315,7	397	397	
Max. Speed, [RPM]	cont.	240	240	190	190	150	150
	int.*	300	300	240	240	190	190
Max. Torque [daNm]	cont.	39	54	39	55	38	61
	int.*	58	61	57	63	60	69
	peak**	71	71	83	83	87	87
Max. Output, [kW]	cont.	6,5	10	6	9	4,8	7,8
	int.*	10,5	12	9,6	11	8,8	10,6
Max. Pressure Drop [bar]	cont.	110	175	90	135	70	115
	int.*	175	200	140	160	115	140
	peak**	225	225	210	210	175	175
Max. Oil Flow [l/min]	cont.	60	60	60	60	60	60
	int.*	75	75	75	75	75	75
Max. Inlet Pressure [bar]	cont.	175	175	175	175	175	175
	int.*	200	200	200	200	200	200
	peak**	225	225	225	225	225	225
Max. Return Pressure w/o Drain Line or max. Pressure in Drain Line, [bar]	cont.0-100 RPM	150	100	150	100	150	100
	cont.100-300 RPM	75	30	75	30	75	30
	cont.300-600 RPM	-	-	-	-	-	-
	int.* 0-max. RPM	150	100	150	100	150	100
Max. Return Pressure with Drain Line [bar]	cont.	175	175	175	175	175	175
	int.*	200	200	200	200	200	200
	peak**	225	225	225	225	225	225
Max. Starting Pressure with Unloaded Shaft, [bar]	4	4	3	3	3	3	
Min. Starting Torque [daNm]	at max. press.	31	50	33	50	30	49
	drop cont.						
	at max. press. drop int.*	48	55	58	66	50	61
Min. Speed***, [RPM]	10	10	10	10	10	10	
Weight, avg., [kg]	OR(F)	8,4	8,5	9,1	9,2	9,8	9,9
	ORW	-	12,1	-	12,6	-	13,3
	ORQ	7,8		8,6		9,3	

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% for every minute.

*** For speeds of 10 RPM or lower, consult factory or your regional manager.

- Intermittent speed and intermittent pressure drop must not occur simultaneously!
- Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- Recommended using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
- Recommended minimum oil viscosity 13 mm²/s at operating temperatures.
- Recommended maximum system operating temperature - 82°C.
- To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 min.



SPECIFICATION DATA for OR...LSV

Low Speed Valve (LSV) "LSV" Series hydraulic motors have been designed to operate with normal pressure drop and to ensure smooth run at low speed (up to 200 RPM), as the best security for operation is guaranteed at frequency of rotation $20 \div 50$ RPM . They have an increased starting pressure drop and are not recommended for using at pressure less than 40 bar.

Look at specification data for hydraulic motors standard version. The modification concerns only the following parameters: maximum speed , maximum output,maximum Oil flow and maximum starting pressure.

Type		OR 50	OR 80	OR 100	OR 125	OR 160	OR 200	OR 250	OR 315	OR 400
Max. Speed [RPM]	Cont.	200	200	200	200	200	200	160	126	100
	Int.*	250	250	250	250	250	250	200	158	126
Max. Output [kW]	Cont.	2	4,0	5,0	6,2	7,0	6,8	6,2	5,8	5,2
	Int.*	3	5,7	7,3	8,5	8,8	8,3	7,8	7,6	6,8
Max. Oil Flow [lpm]	Cont.	13	23	26	33	40	40	40	40	40
	Int.*	16	31	34	45	50	50	50	50	50
Max. Starting Pressure with unloaded Shaft, [bar]		20	20	20	20	15	15	15	12	12

SPECIFICATION DATA for OR...LL

Low Leakage (LL) "LL" Series hydraulic motors have been designed to operate at the whole standard range of working conditions (pressure drop and frequency of rotation) , but with considerable decreased volumetric losses in the drainage ports. Their main purpose is to operate as series-connected motors in hydraulic systems.

For this version is permissible decreasing of the maximal torque with up to 5% (at middle speed) and up to 10% (at high speed) in comparison to the standard versions of motors.

Look at specification data for hydraulic motors series OR standard version. The modification concerns only the parameters: maximum torque,maximum output, minimum starting torque.

Type		OR 50	OR 80	OR 100	OR 125	OR 160	OR 200	OR 250	OR 315	OR 400
Max. Torque [daNm]	Cont.	9,6	18,5	22,8	28,5	37,1	42,8	51,3	52,2	58,0
	Int.*	12,4	20,9	26,6	32,3	40,9	47,5	58,0	60,0	65,6
Max. Output [kW]	Cont.	9,0	12,3	12,8	12,4	11,4	10,9	9,9	8,9	7,7
	Int.*	11,9	14,8	14,8	14,3	13,8	12,8	11,8	10,9	10,5
Max. Pressure Drop [bar]	Cont.	140	175	175	175	175	175	175	135	115
	Int.*	175	200	200	200	200	200	200	160	140
Min. Starting Torque [daNm]	Cont.	7,6	14,2	19,0	23,8	30,4	39,0	47,5	47,5	46,5
	Int.*	9,5	16,2	21,8	26,6	35,2	43,7	52,2	62,7	58,0

SPECIFICATION DATA for OR...FR

Free Running version "FR" these are the hydraulic motors with reduced mechanical losses , for which at disengaged condition / unconnected with driving mechanism / the rotation of the shaft could be realized by means of small torque. This advantage is especially useful at operating with high frequencies of rotation /over than 300 min⁻¹ / and low pressure drop , which is inbred for types with displacements of up to 200 cm³. It is normal for these for the different condition of operation to have high torque , as well as high volume losses: the values of the volumetric efficiency are lower (up to 5 % for middle and up to 10% for high values of the pressure drop) , than these of the normal versions. That's why the recommended operating for "FR version is for applications with pressure drop up to 100 bar.


Additional advantages of "FR" version are prolonging of the life of the hydraulic motors at high frequencies of rotation, as well as the possibility to use them in systems with big variation of the loading.

Look at specification data for hydraulic motors series OR standard version. Only the parameter Starting Pressure is modified.


Type	OR 50	OR 80	OR 100	OR 125	OR 160	OR 200
Max. Starting Pressure with Unloaded Shaft, [bar]	8	8	8	7,5	5,5	4

FUNCTION DIAGRAMS

OR 50

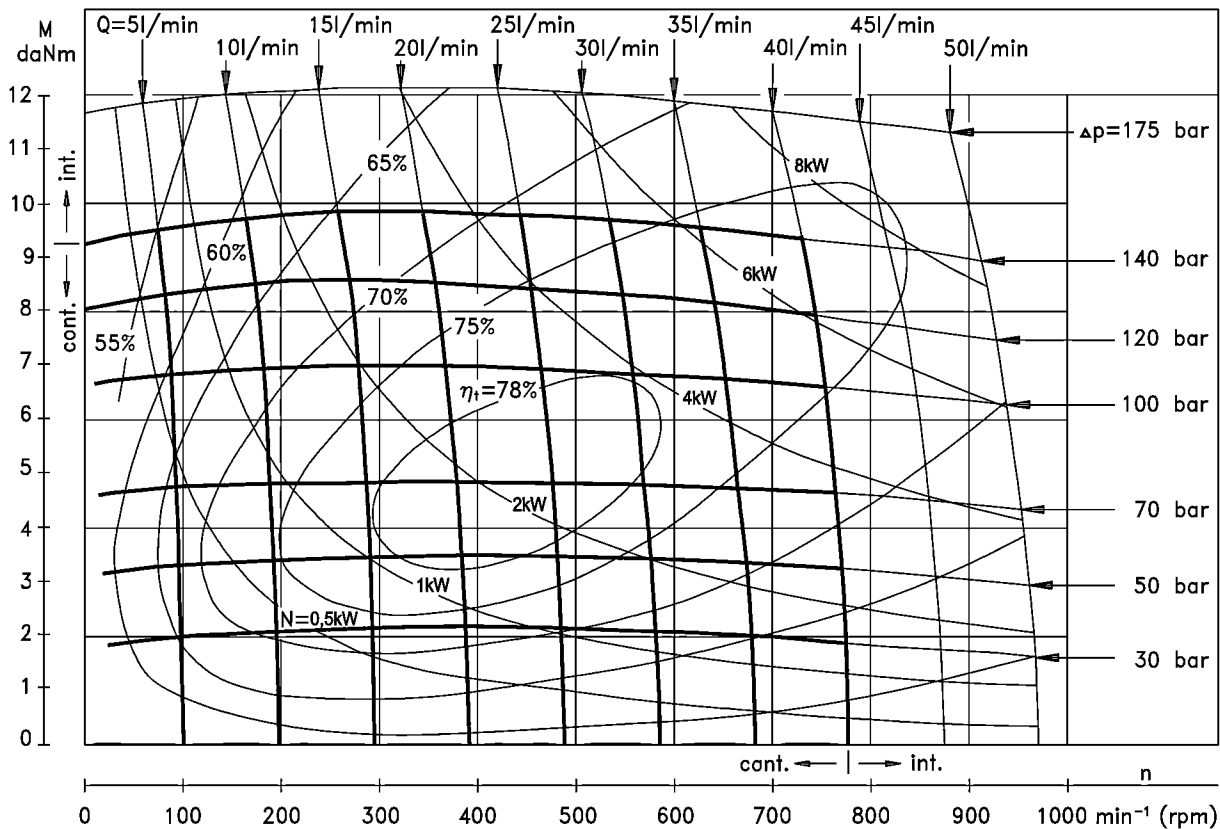


OR 80

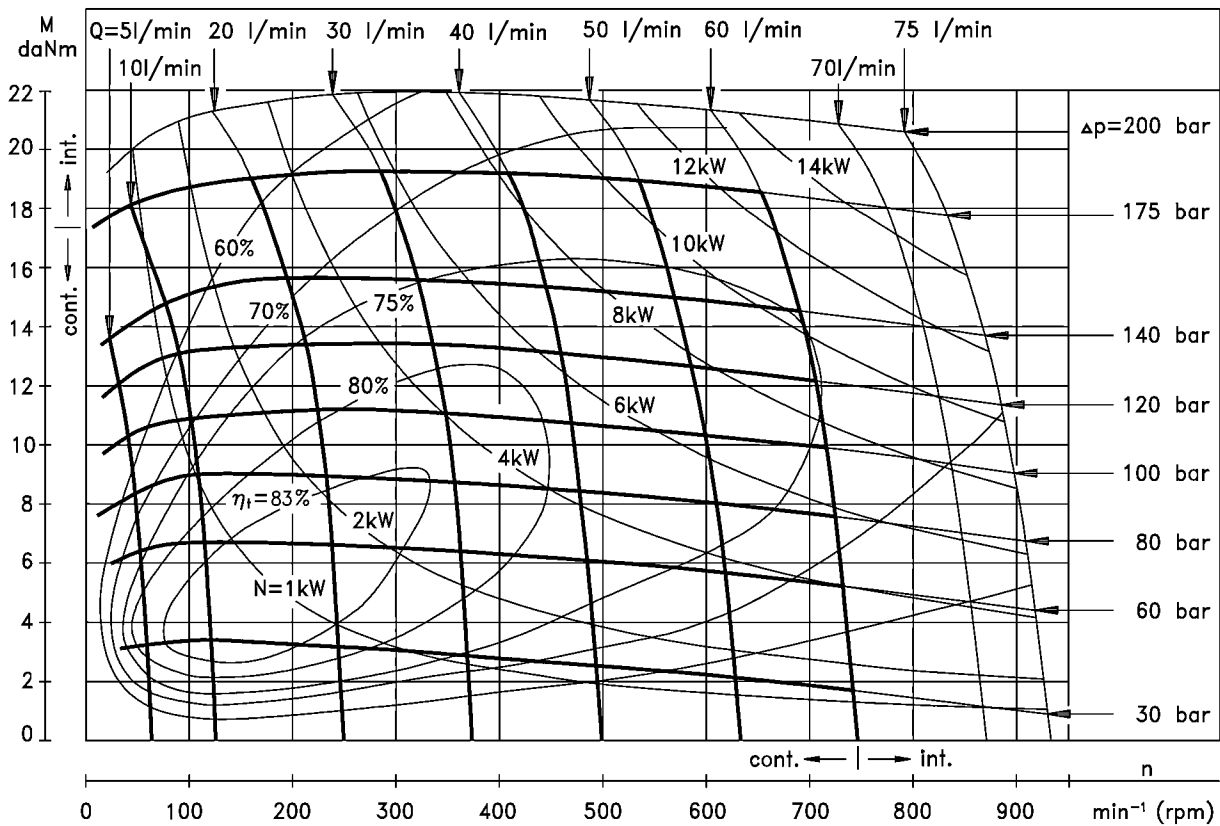


The function diagrams data was collected at back pressure 5±10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OR 100

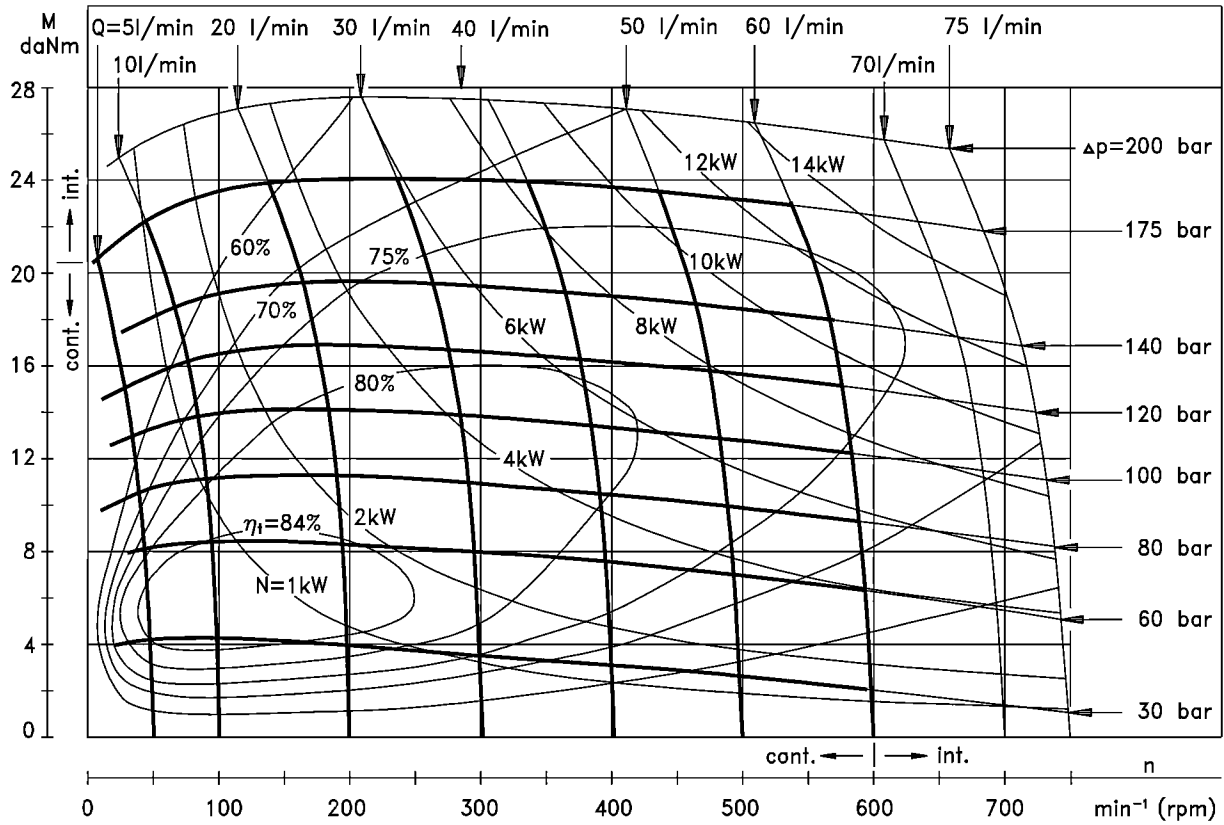


OR 125

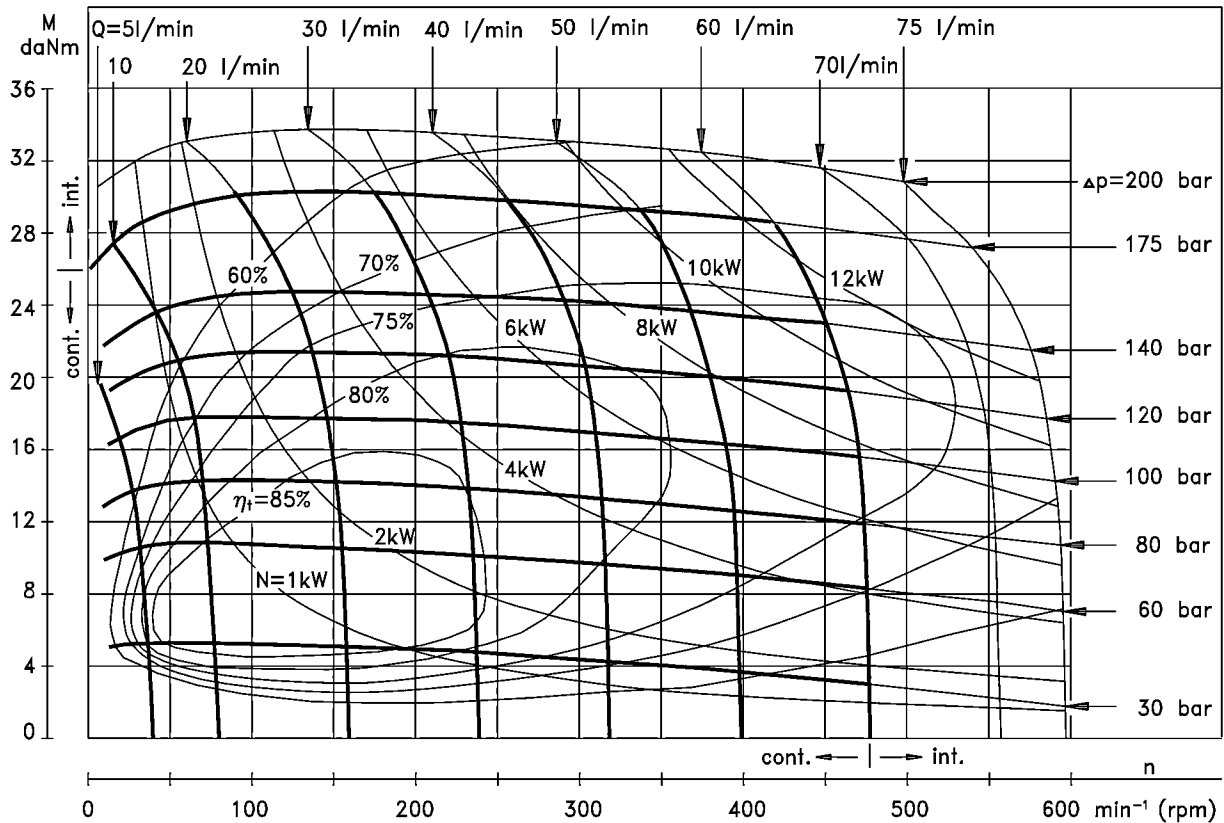


The function diagrams data was collected at back pressure 5±10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OR 160

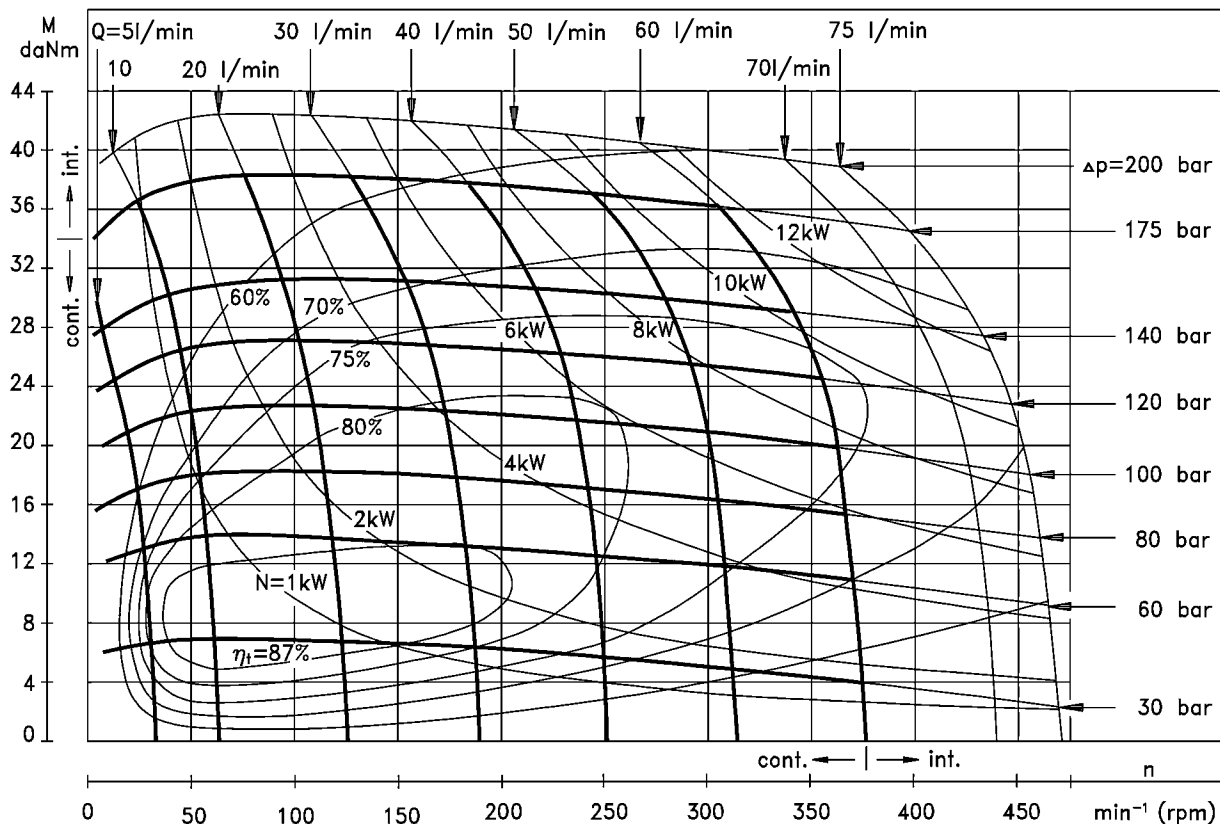


OR 200

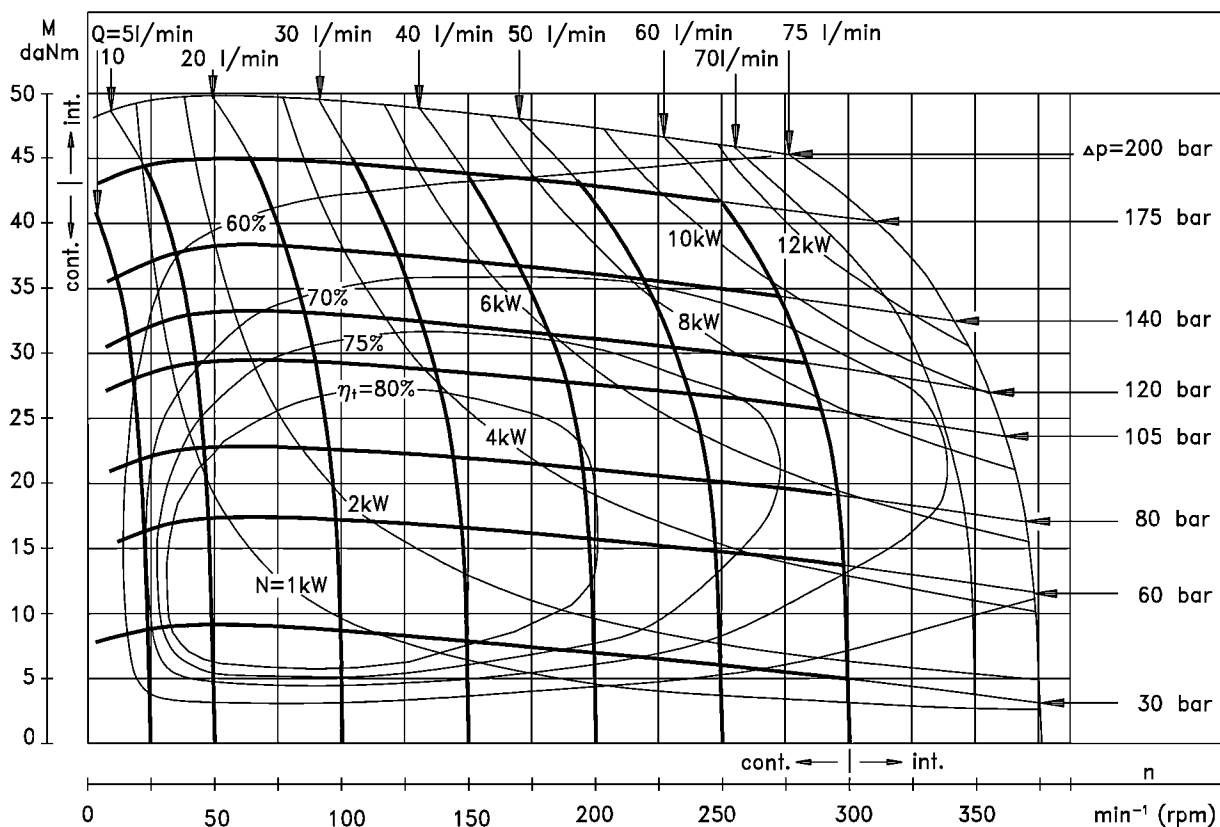


The function diagrams data was collected at back pressure 5±10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OR 250

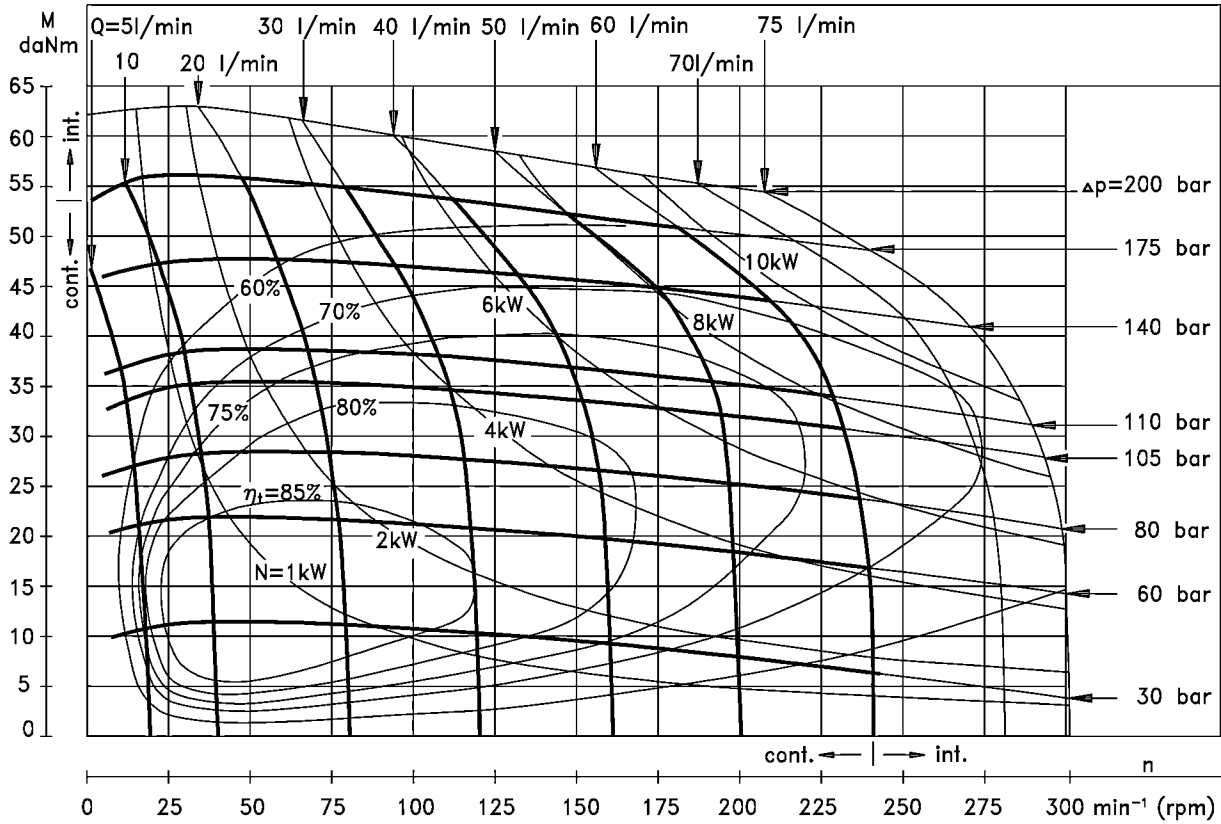


OR 315

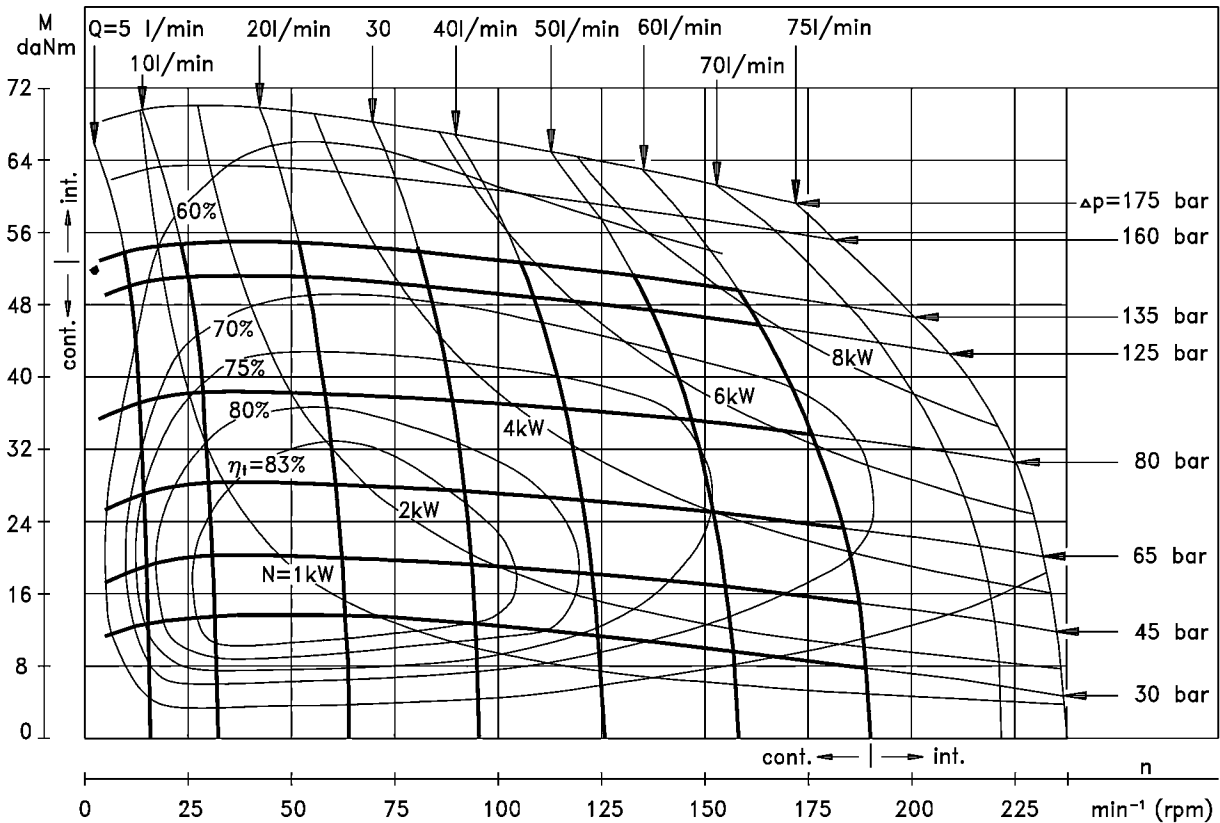

The function diagrams data was collected at back pressure 5±10 bar and oil with viscosity of 32 mm²/s at 50° C.


FUNCTION DIAGRAM

OR 400

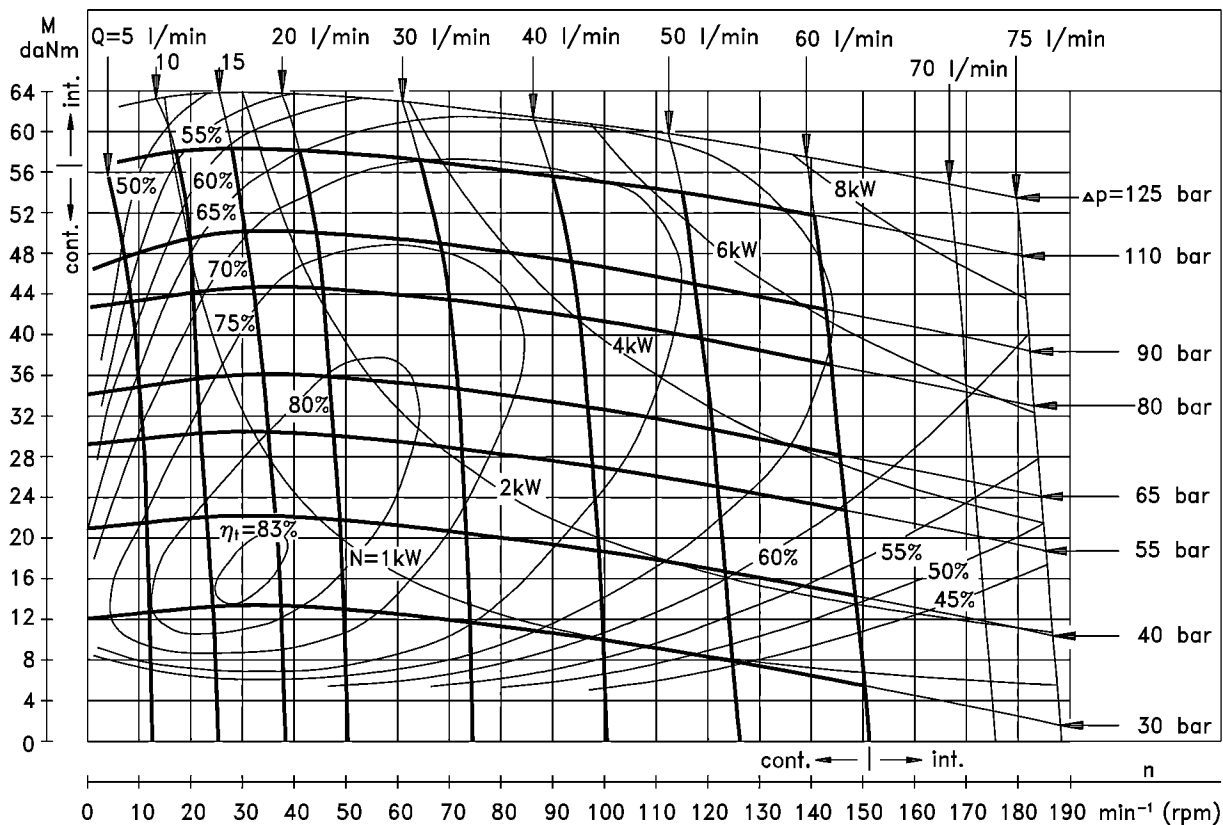


The function diagram data was collected at back pressure $5+10$ bar and oil with viscosity of $32 \text{ mm}^2/\text{s}$ at 50° C .

Max. Permissible Shaft Seal Pressure for OP and OR Motors

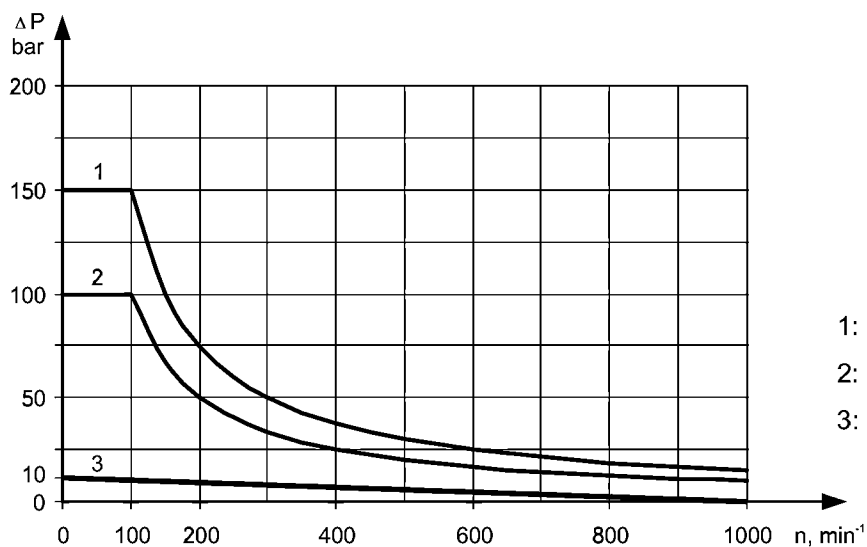

- 1: Drawing for "D" Seal
- 2: Drawing for "...B" Shaft Seal
- 3: Drawing for Quadring

DIMENSIONS AND MOUNTING DATA

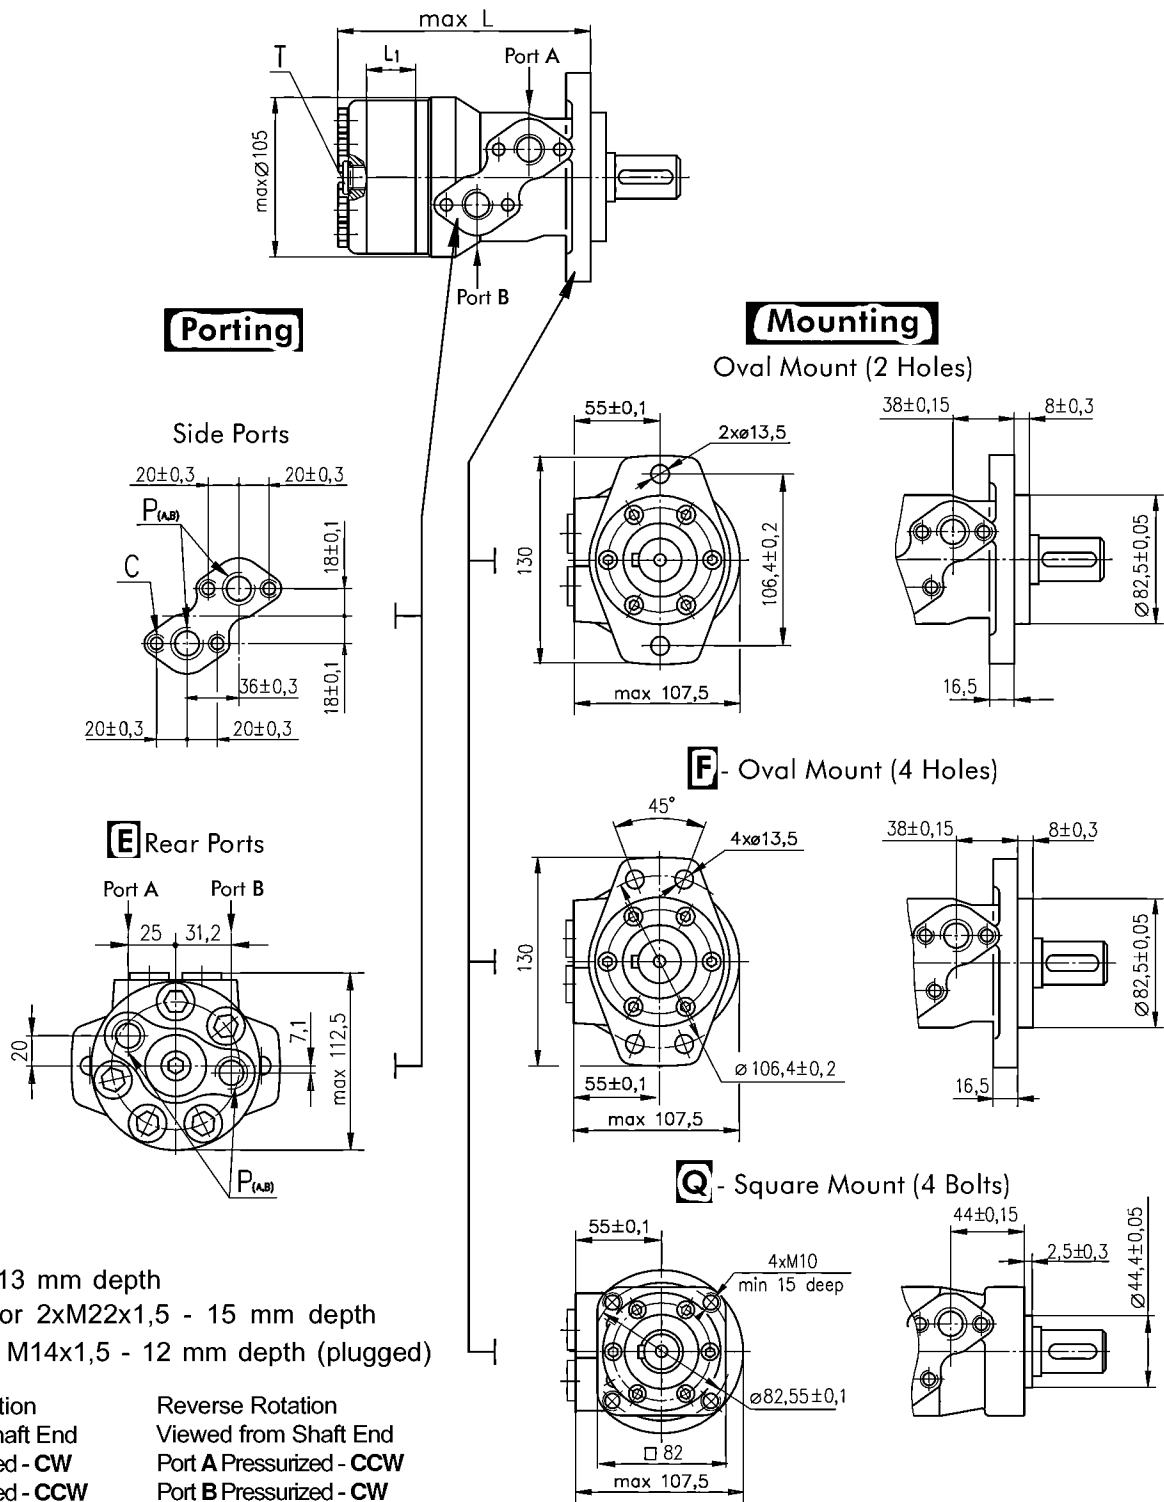




C : 4xM8 - 13 mm depth
P_(A,B) : 2xG1/2 or 2xM22x1,5 - 15 mm depth
T : G1/4 or M14x1,5 - 12 mm depth (plugged)

Standard Rotation	Reverse Rotation
Viewed from Shaft End	Viewed from Shaft End
Port A Pressurized - CW	Port A Pressurized - CCW
Port B Pressurized - CCW	Port B Pressurized - CW

Type	L,mm	Type	L,mm	Type	L,mm	Type	L,mm	L ₁ , mm
ORF 50	138,0	ORQ 50	143,5	ORFE 50	157,5	ORQE 50	163,5	9,0
ORF 80	143,0	ORQ 80	148,5	ORFE 80	162,5	ORQE 80	168,5	14,0
ORF 100	146,0	ORQ 100	152,0	ORFE 100	165,5	ORQE 100	171,5	17,4
ORF 125	150,5	ORQ 125	156,5	ORFE 125	170,0	ORQE 125	176,0	21,8
ORF 160	156,5	ORQ 160	162,5	ORFE 160	176,0	ORQE 160	182,0	27,8
ORF 200	163,5	ORQ 200	169,5	ORFE 200	183,0	ORQE 200	189,0	34,8
ORF 250	172,0	ORQ 250	179,0	ORFE 250	192,0	ORQE 250	198,0	43,5
ORF 315	183,0	ORQ 315	189,0	ORFE 315	204,0	ORQE 315	210,0	54,8
ORF 400	198,0	ORQ 400	204,0	ORFE 400	218,0	ORQE 400	224,0	69,4

DIMENSIONS AND MOUNTING DATA - ORW

W Wheel Mount

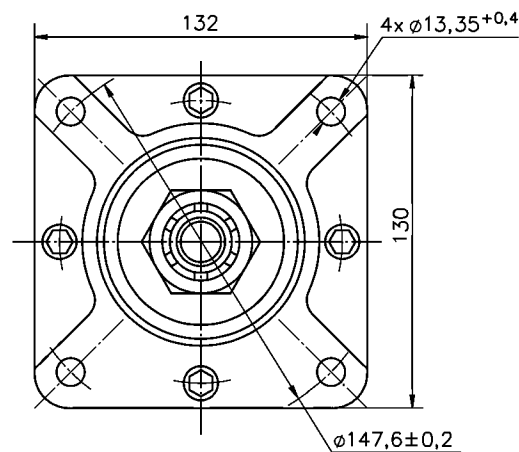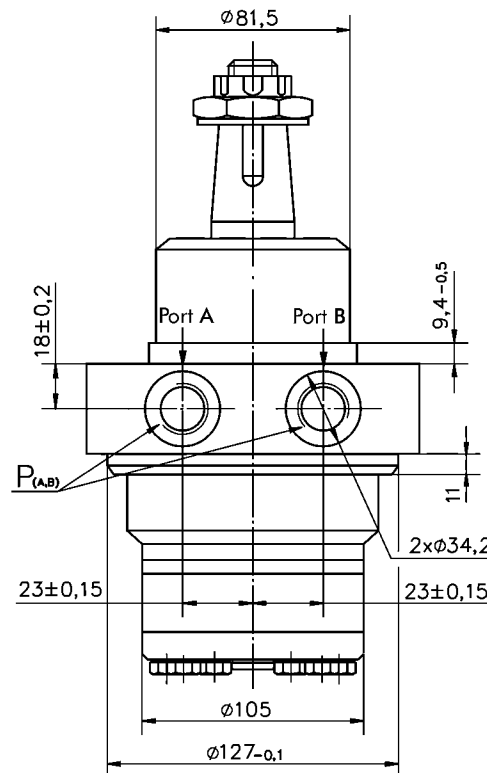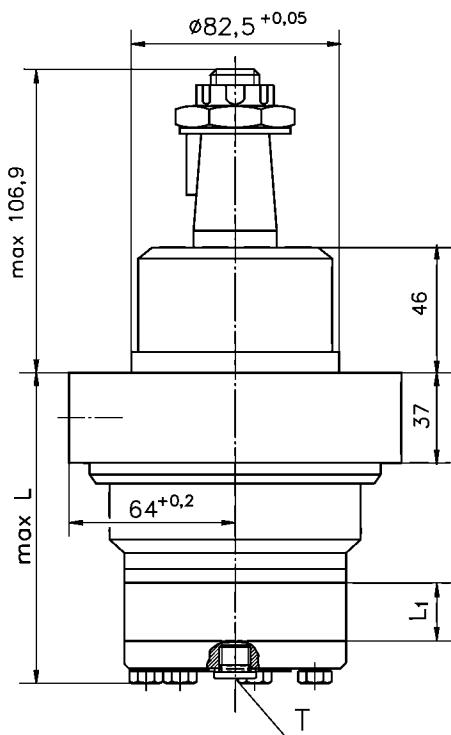


$P_{(A,B)}$: 2xG1/2 or 2xM22x1,5 - 15 mm depth
T : G1/4 or M14x1,5 - 12 mm depth (plugged)

Standard Rotation
 Viewed from Shaft End
 Port A Pressurized - CW
 Port B Pressurized - CCW

Reverse Rotation
 Viewed from Shaft End
 Port A Pressurized - CCW
 Port B Pressurized - CW


Permissible Shaft Loads ORW

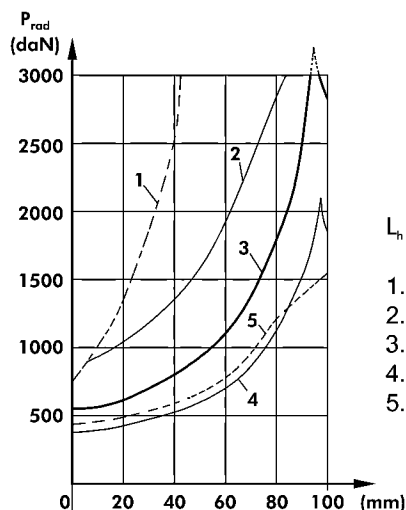

$L_h = 2500$ h

1. Permissible radial shaft load
2. Drawing by $n = 50 \text{ min}^{-1}$
3. Drawing by $n = 200 \text{ min}^{-1}$
4. Drawing by $n = 800 \text{ min}^{-1}$
5. Drawing by $n = 200 \text{ min}^{-1}$ and $P_o \text{ max} = 500 \text{ daN}$


$P_o \text{ max} = 500 \text{ daN}$

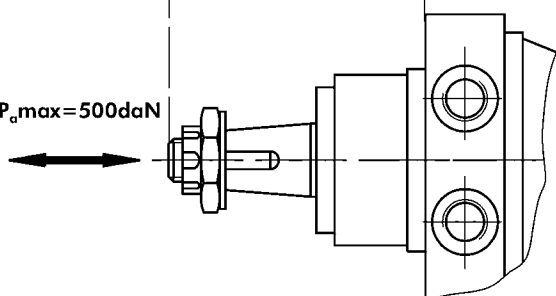


Type	L, mm	L_1 , mm
ORW 50	108,0	9,0
ORW 80	113,0	14,0
ORW 100	116,5	17,4
ORW 125	121,0	21,8
ORW 160	127,0	27,8
ORW 200	134,0	34,8
ORW 250	142,5	43,5
ORW 315	154,0	54,8
ORW 400	168,5	69,4

SHAFT EXTENSIONS FOR OP AND OR MOTORS


C - $\varnothing 25$ straight, Parallel key A8x7x32 DIN 6885
Max. Torque 44 daNm

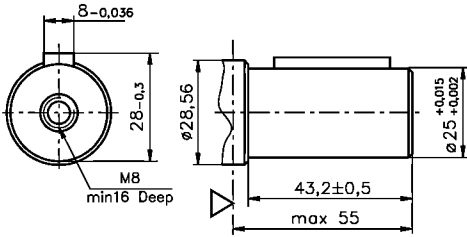


CB - $\varnothing 32$ straight, Parallel key A10x8x45 DIN 6885
Max. Torque 77 daNm

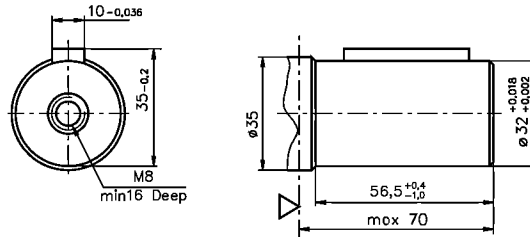


CO - $\varnothing 1"$ straight, Parallel key $1/4"x1/4"x1 1/4"$ BS46
Max. Torque 44 daNm

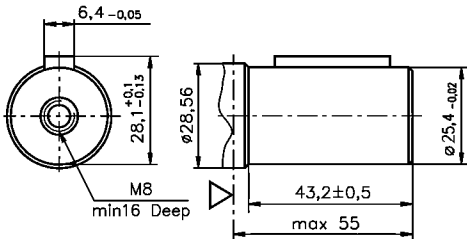


SB - splined A25x22xH10 DIN 5482
Max. Torque 44 daNm

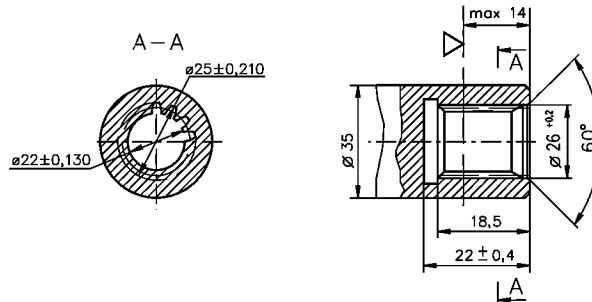


SH - splined, BS 2059 (SAE 6B)
Max. Torque 44 daNm

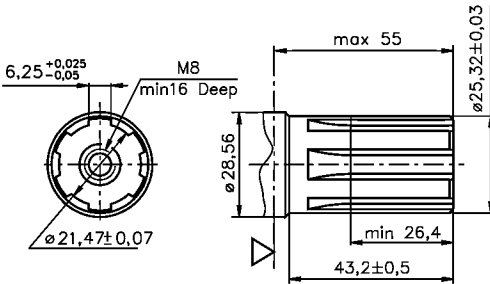


KB - tapered 1:10, Parallel key B6x6x20 DIN 6885
Max. Torque 77 daNm

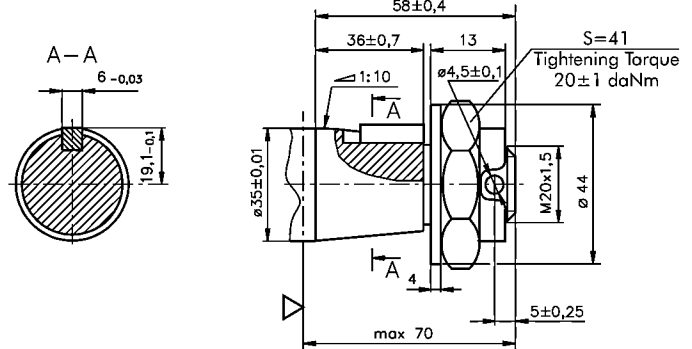


K - tapered 1:10, Parallel key B5x5x14 DIN 6885
Max. Torque 40 daNm

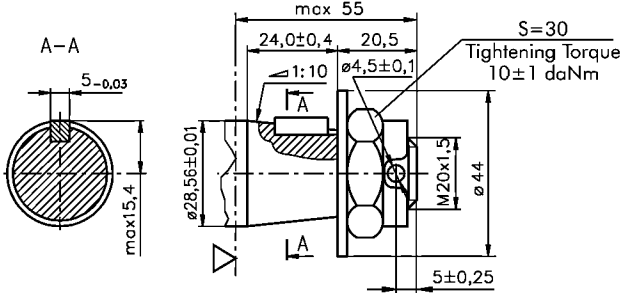


OB - tapered 1:8 SAEJ 501, Parallel key $5/16"x5/16"x1 1/4"$ BS46
Max. Torque 77 daNm

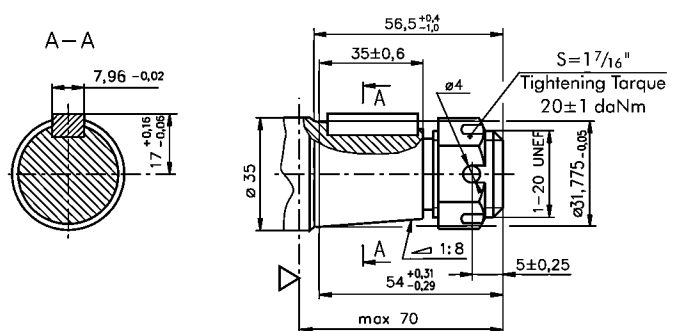

SA - splined, B25x22h9 DIN 5482
Max. Torque 40 daNm

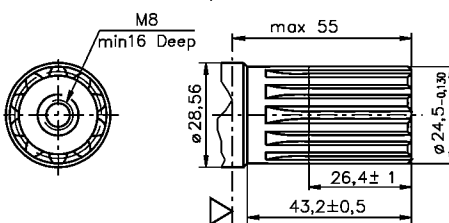




HB - $\varnothing 1 1/4"$ splined 14T, ANSI B92.1-1976 Norm
Max. Torque 77 daNm

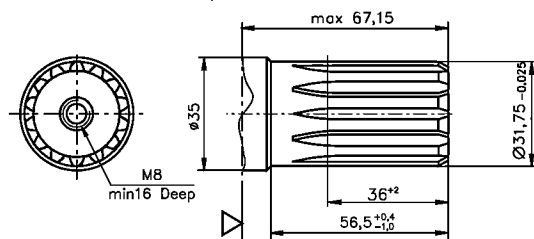

∇ - Motor Mounting Surface

PERMISSIBLE SHAFT LOADS FOR OR MOTORS

The permissible radial shaft load P_{rad} depends on the speed (RPM) and distance (L) from the point of load to the mounting flange.

Mounting Flange			
Shaft Version	cylindrical - C, CO tapered - K, splined - SH	splined - HB cylindrical - CB	cylindrical - C, CO
Radial Shaft Load P_{rad}^*	$\frac{800}{n} \times \frac{25000}{95+L}$, daN	$\frac{800}{n} \times \frac{18750}{95+L}$, daN	$\frac{800}{n} \times \frac{25000}{101+L}$, daN

$n < 200 \text{ min}^{-1}$; max $P_{rad} = 800 \text{ daN}$



* $n \geq 200 \text{ min}^{-1}$; $L < 55 \text{ mm}$

ORN



OR

The curves apply to a B_{10} bearing life of 2000 hours.

- 1: Max. radial shaft load
- 2: $n = 50 \text{ min}^{-1}$
- 3: $n = 200 \text{ min}^{-1}$
- 4: $n = 800 \text{ min}^{-1}$

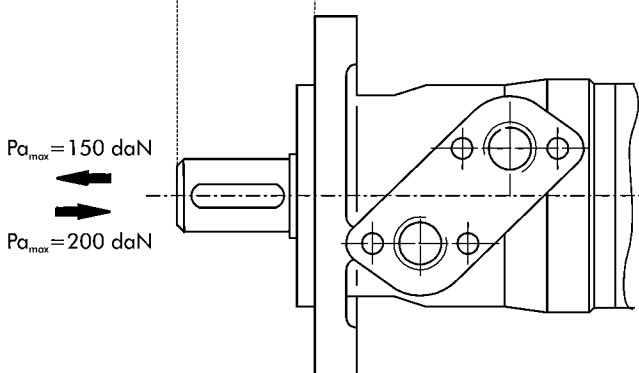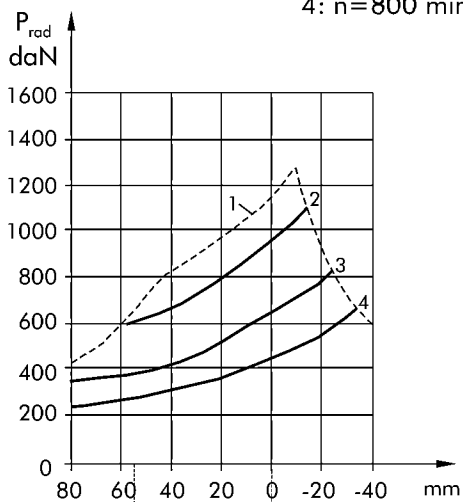


Radial Shaft Load P_{rad} for C, CO Shaft Extensions
by $L = 30 \text{ (24) mm}$

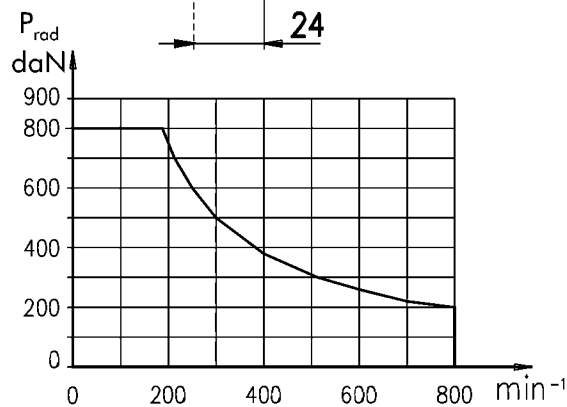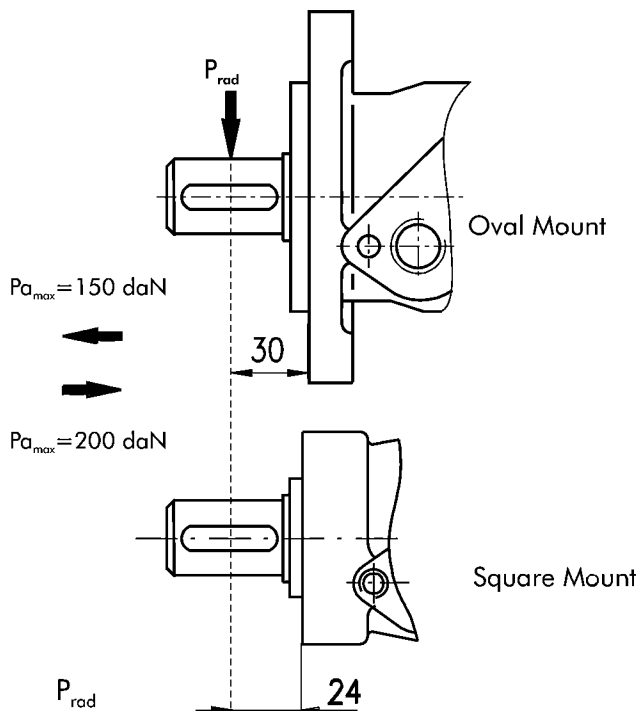

HYDRAULIC MOTORS WITH SPEED SENSOR TYPE

MetaHydraulic is introducing hydraulic motor with a new generation of speed sensor. The electric output signal is a standard voltage signal that can be used for regulating the speed of a motor.

The speed is measured by a sensor in accordance with the Hall principle. Signal processing and amplification are performed in the sensor housing. A connection is provided in the housing by a Plug connector M12 Series.

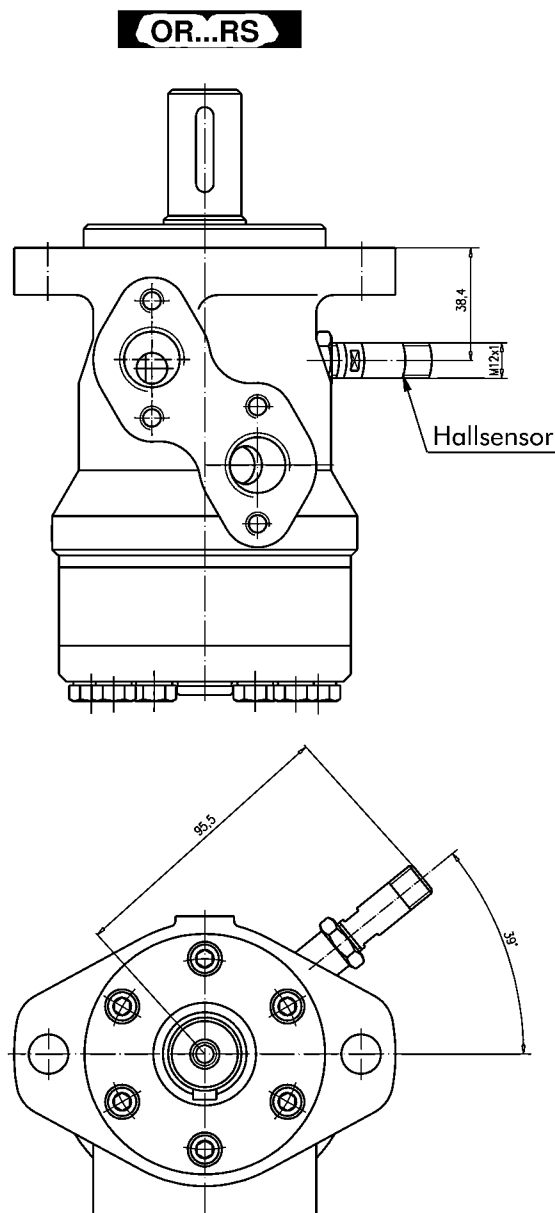


This performance is applicable for all motors of OR series. The main technical features correspond to the standard motor series OR.

DIFFERENTIAL HALL SENSOR

Technical data

Frequency range	3...20 000 Hz
Output	PNP
Power supply	10...36 VDC
Current input	20 mA (@24 VDC)
Current load	500 mA (@24 VDC;24°C)
Ambient Temperature	minus 40... plus 125°C
Protection	IP 67
Plug connector	M12-Series
Mounting principle	ISO 6149


Output signal

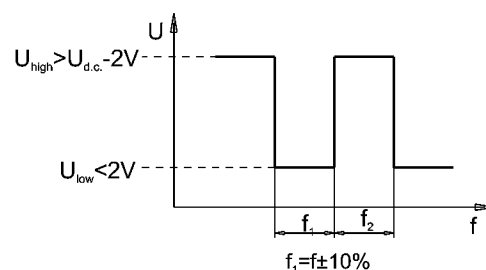


Load max.: $I_{high} = I_{low} < 50\text{mA}$

No load current, max: 20 mA

Wiring diagram

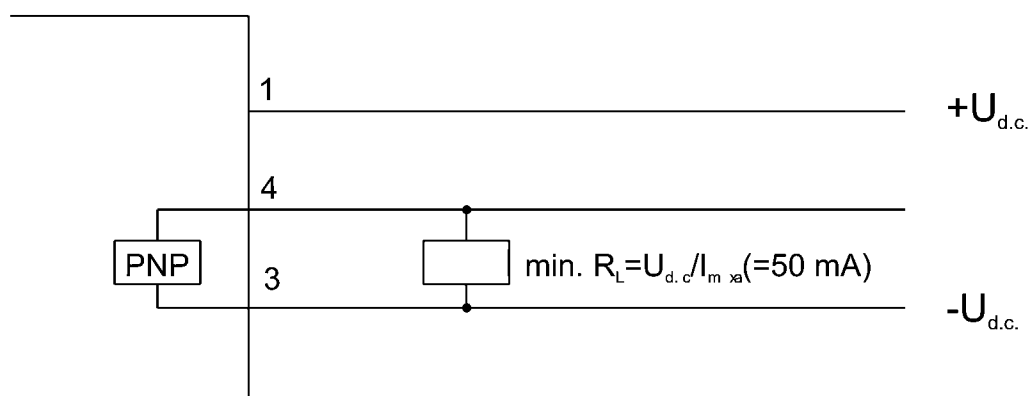

Stik type



Terminal No.	Connection
1	$U_{d.c.}$ (+supply)
2	No connection
3	$U_{d.c.}$ (-supply)
4	Output signal

ORDER CODE

	1	2	3	4	5	6	7	8	9	10	11	12
OR												

Pos.1 - Shaft Seal Version (see page OR-10)

- omit - Low pressure seal or Seal for "...B" shaft
- D** - High pressure seal not for "...B" shaft

Pos.2 - Case Drain

- omit - with drain port
- U** - without drain port

Pos.3 - Mounting Flange

- omit - Oval mount, two holes
- F** - Oval mount, four holes
- Q** - Square mount, four bolts
- W** - Wheel mount

Pos.4 - Option (needle bearings)

- omit - none
- N*** - with needle bearings (not valid for ORW)

Pos.5 - Port type

- omit - Side ports
- E** - Rear ports

Pos.6 - Displacement code

- 50** - 51,5 [cm³/rev]
- 80** - 80,3 [cm³/rev]
- 100** - 99,8 [cm³/rev]
- 125** - 125,7 [cm³/rev]
- 160** - 159,6 [cm³/rev]
- 200** - 199,8 [cm³/rev]
- 250** - 250,1 [cm³/rev]
- 315** - 315,7 [cm³/rev]
- 400** - 397,0 [cm³/rev]

Pos. 7 - Shaft Extensions(see page OP - 13)**

- C** - ø25 straight, Parallel key A8x7x32 DIN6885
- VC** - ø25 straight, Parallel key A8x7x32 DIN6885 with corrosion resistant bushing
- CO** - ø1" straight, Parallel key ¼"x¼"x1¼" BS46
- VCO** - ø1" straight, Parallel key ¼"x¼"x1¼" BS46 with corrosion resistant bushing
- SH** - ø25,32 splined BS 2059 (SAE 6B)
- VSH** - ø25,32 splined BS 2059 (SAE 6B) with corrosion resistant bushing
- K** - ø28,56 tapered 1:10, Parallel key B5x5x14 DIN6885
- SA** - ø24,5 splined B 25x22 DIN 5482
- VSA** - ø24,5 splined B 25x22 DIN 5482 with corrosion resistant bushing
- CB** - ø32 straight, Parallel key A10x8x45 DIN6885
- KB** - ø35 tapered 1:10, Parallel key B6x6x20 DIN6885
- SB** - splined A 25x22 DIN 5482
- OB** - ø1¼" tapered 1:8, Parallel key ⅝"x ⅝"x1¼" BS46
- HB** - ø1¼" splined 14T ANSI B92.1 - 1976

Pos.8 - Ports

- omit - BSPP (ISO 228)
- M** - Metric (ISO 262)

Pos.9 - Special Features (see Specification data on page OR-05)

- omit - none
- LL** - Low Leakage
- LSV** - Low Speed Valve
- FR** - Free Running

Pos.10 - Rotation

- omit - Standard Rotation
- R** - Reverse Rotation

Pos.11 - Option (Paint)***

- omit - no Paint
- P** - Painted
- PC** - Corrosion Protected Paint

Pos.12 - Speed Monitoring


- omit - none
- RS-P** - with speed sensor (PNP pull-down resistor)
- RS-N** - with speed sensor (NPN pull-up resistor)

NOTES:

* Only with "D" Shaft Seal Versions!
 ** 1) The permissible output torque for shafts must be not exceeded!
 2) The following combinations are not allowed - **Q,N** options with "...B" shafts
 3) ORW is available only with **CB, KB** and **OB** shafts
 ***Color at customer's request.


The hydraulic motors are manganophosphatized as standard.

LOW SPEED HIGH TORQUE MOTORS OK



INTRODUCTION

OK Series have a spool valve: the distribution valve is integrated in the output shaft. The cardan shaft thus rotates the distribution valve and transfers mechanical energy from the gerotor set to the output shaft.




SPECIFICATION DATA

Code	Displacement [cm ³ /rev]	Max. Speed [RPM]	Max. Torque [daNm]		Max. Output [kW]		Max. Pressure Drop [bar]		Max. Oil Flow [lpm]
		cont.	cont.	int*	cont.	int*	cont.	int*	cont.
OK 50	51,5	775	10	13	9	10,4	140	175	40
OK 80	80,3	750	15,7	19,5	10,4	12,6	140	175	60
OK 100	99,8	600	19,8	24	10,8	12,8	140	175	60
OK 125	125,7	475	25	30	10,8	12,5	140	175	60
OK 160	159,6	375	32	39	10,4	11,5	140	175	60
OK 200	199,8	300	34	42	8,8	10,2	125	155	60
OK 250	250,1	240	40	47	8,1	9,4	110	140	60
OK 315	315,7	190	40	50	7,4	7,8	90	125	60
OK 400	397	150	40	50	6,2	7,1	75	90	60

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

OUTLINE DIMENSIONS REFERENCE

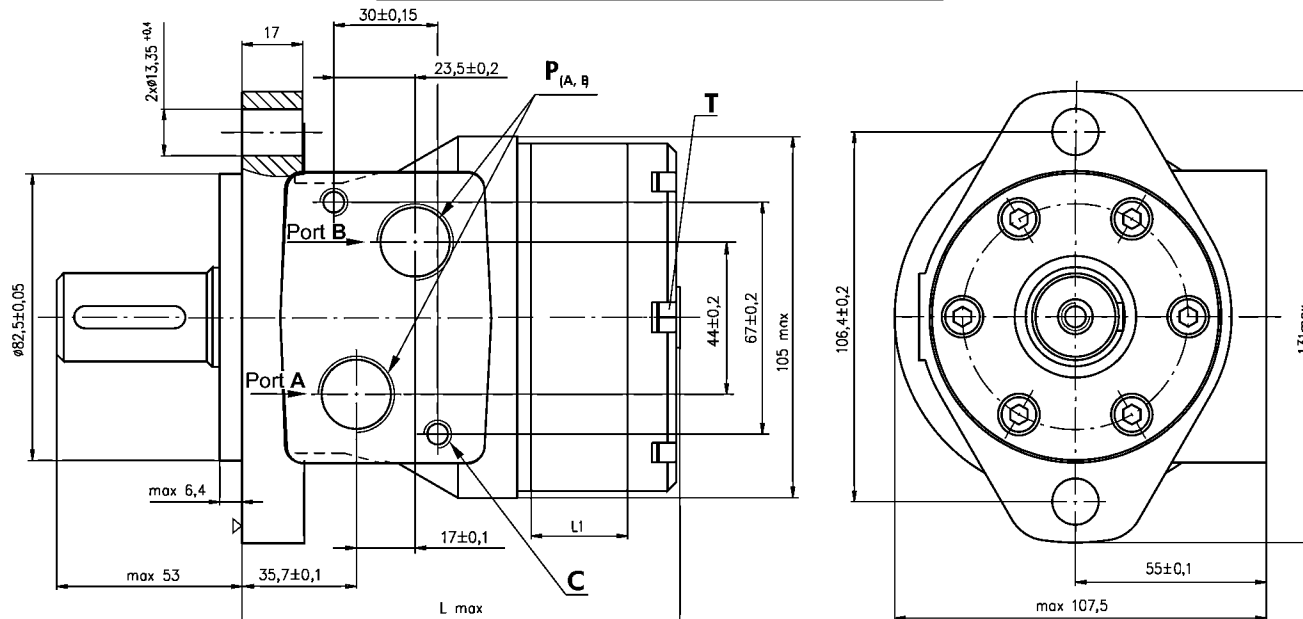

C : 2xM8 - 13mm depth
P_(A, B) : 2xG1/2 - 15mm depth
T : G1/4 - 12mm depth (plugged)


Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW

Type	L, mm	L ₁ , mm
OK 50	107,5	9,0
OK 80	112,5	14,0
OK 100	116	17,4
OK 125	120,5	21,8
OK 160	126,5	27,8
OK 200	133,5	34,8
OK 250	142	43,5
OK 300	153,5	54,8
OK 400	168	69,4

SHAFT EXTENSIONS


C

ø25 straight, Parallel key A8x7x32 DIN 6885
Max. Torque 44 daNm

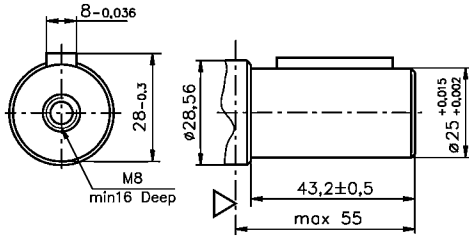


CO

ø25,4 straight, Parallel key 1/4"x1/4"x1/4" BS46
Max. Torque 44 daNm

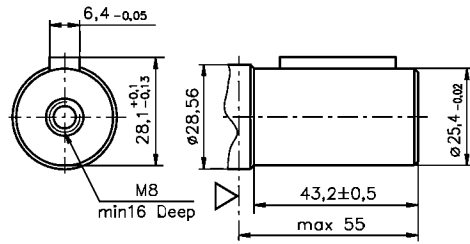


SH

ø28,56 Splined, BS 2059 (SAE 6B)
Max. Torque 44 daNm

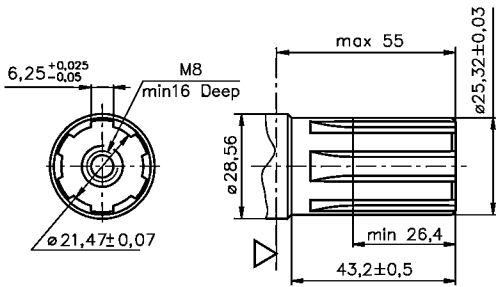


K

ø28,56; Tapered 1:10 Parallel key B5x5x14 DIN 6885
Max. Torque 44 daNm

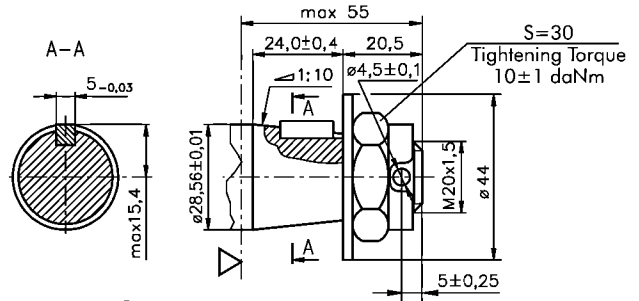

SA

ø28,56 Splined, B25x22h9 DIN 5482
Max. Torque 44 daNm

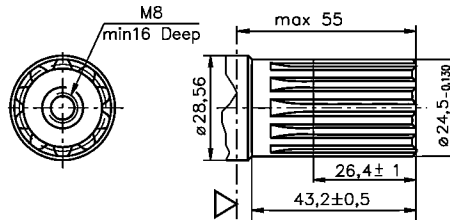

▽- Motor Mounting Surface

ORDER CODE

	1	2	3	4	5	6	7
OK							

Pos.1	Displacement code
50	- 51,5 [cm ³ /rev]
80	- 80,3 [cm ³ /rev]
100	- 99,8 [cm ³ /rev]
125	- 125,7 [cm ³ /rev]
160	- 159,6 [cm ³ /rev]
200	- 199,8 [cm ³ /rev]
250	- 250,1 [cm ³ /rev]
315	- 315,7 [cm ³ /rev]
400	- 397,0 [cm ³ /rev]
Pos.2	Shaft Extensions*
C	- ø25 straight, Parallel key A8x7x32 DIN6885
CO	- ø25 straight, Parallel key 1/4"x1/4"x1/4" BS46
SH	- ø28,56 splined BS 2059 (SAE 6B)
K	- ø28,56 tapered 1:10, Parallel key, B5x5x14 DIN6885
SA	- ø28,56 splined B25x22h9 DIN 5482


Pos.3	Ports
	omit - BSPP (ISO 228)
Pos.4	Rotation
	omit - Standard Rotation
R	- Reverse Rotation
Pos. 5	Option (Paint)**
	omit - no Paint
P	- Painted Low Gloss Color
PC	- Corrosion Protected Paint
Pos. 6	Special Features
	omit - none
LL	- Low Leakage
LSV	- Low Speed Valve
FR	- Free Running
Pos. 7	Design Series
	omit - Factory specified

NOTES:

* The permissible output torque for shafts must be not exceeded!


** Color at customer's request.

HYDRAULIC MOTORS OPL



APPLICATION

- » Conveyors;
- » Feeding mechanism of robots and manipulators;
- » Metal working machines;
- » Textile machines;
- » Machines for agriculture;
- » Food industries;
- » Mining machinery etc.



CONTENTS

Specification data OPL-02
 Function diagramsOP-06÷09
 Dimensions and mounting ... OPL-03
 Shaft extensions OPL-04
 Permissible shaft loads OPL-04
 Order code OPL-05

OPTIONS

- » Model- Spool valve, gerotor;
- » Antifriction conical bearings;
- » Flange mount;
- » Shafts- straight, splined and tapered;
- » Metric and BSPP ports;
- » Other special features.


GENERAL

Displacement,	[cm ³ /rev.]	49,5 ÷ 396
Max. Speed,	[RPM]	1210 ÷ 150
Max. Torque,	[daNm]	9,4 ÷ 50
Max. Output,	[kW]	9,9 ÷ 11,7
Max. Pressure Drop,	[bar]	140 ÷ 95
Max. Oil Flow,	[l/min]	60
Min. Speed,	[RPM]	10
Permissible Shaft Loads, [daN]		P _{rod} = 1500; P _α = 800
Pressure fluid		Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range,	[°C]	-30 ÷ 90
Optimal Viscosity range,	[mm ² /s]	20 ÷ 75
Filtration		ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

Oil flow in drain line

Pressure drop (bar)	Viscosity (mm ² /s)	Oil flow in drain line (l/min)
100	20	2,5
	35	1,8
140	20	3,5
	35	2,8

Pressure Losses

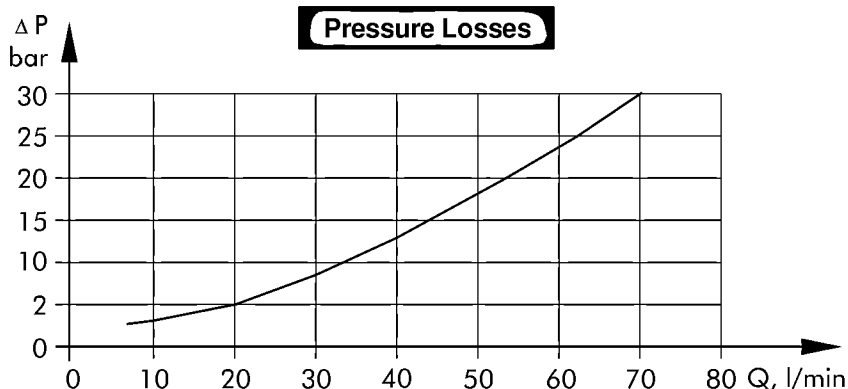



SPECIFICATION DATA

Type	OPL 50	OPL 80	OPL 100	OPL 125	OPL 160	OPL 200	OPL 250	OPL 315	OPL 400	
Displacement, [cm.³/rev.]	49,5	79,2	99	123,8	158,4	198	247,5	316,8	396	
Max. Speed, [RPM]	Cont.	1210	755	605	485	378	303	242	190	150
	Int.*	1515	945	755	605	472	378	303	236	189
Max. Torque [daNm]	Cont.	9,4	15,1	19,3	23,7	31,3	36,6	47,0	48,6	50,0
	Int.*	11,9	19,5	23,7	29,8	37,8	45,6	58,3	56,0	59,0
	Peak**	14,0	22,0	27,0	36,5	42	53,0	67,0	85,0	85,4
Max. Output [kW]	Cont.	9,9	9,9	9,9	9,9	11,7	10,3	9,8	7,6	6,6
	Int.*	12,5	12,5	12,5	12,5	12,5	15,5	17,5	8,2	9,2
Max. Pressure Drop [bar]	Cont.	140	140	140	140	140	140	140	120	95
	Int.*	175	175	175	175	175	175	175	140	115
	Peak**	225	225	225	225	225	225	225	225	180
Max. Oil Flow [l/min]	Cont.	60	60	60	60	60	60	60	60	60
	Int.*	75	75	75	75	75	75	75	75	75
Max. Inlet Pressure [bar]	Cont.	175	175	175	175	175	175	175	175	175
	Int.*	200	200	200	200	200	200	200	200	200
	Peak**	225	225	225	225	225	225	225	225	225
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line, [bar]	Cont. 0-100 RPM	100	100	100	100	100	100	100	100	100
	Cont. 100-300 RPM	50	50	50	50	50	50	50	50	50
	Cont. 300-600 RPM	25	25	25	25	25	25	25	25	25
	Cont. >600 RPM	15	15	15	15	15	15	15	15	15
	Int.* 0-max. RPM	100	100	100	100	100	100	100	100	100
Max. Return Pressure with Drain Line [bar]	Cont.	175	175	175	175	175	175	175	175	175
	Int.*	200	200	200	200	200	200	200	200	200
	Peak**	225	225	225	225	225	225	225	225	225
Max. Starting Pressure with Unloaded Shaft, [bar]	10	10	10	9	8	7	6	5	5	
Min. Starting Torque [daNm]	7,7	14,0	16,8	21,0	28,0	34,6	44,0	46,0	50,0	
Min. Speed***, [RPM]	10	10	10	10	10	10	10	10	10	
Weight, [kg]	8,4	8,5	8,8	8,9	9,1	9,5	10,0	10,7	11,4	


* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 10 RPM or lower, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommended using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 13 mm²/s at operating temperatures.
5. Recommended maximum system operating temperature is 82°C.
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

DIMENSIONS AND MOUNTING DATA

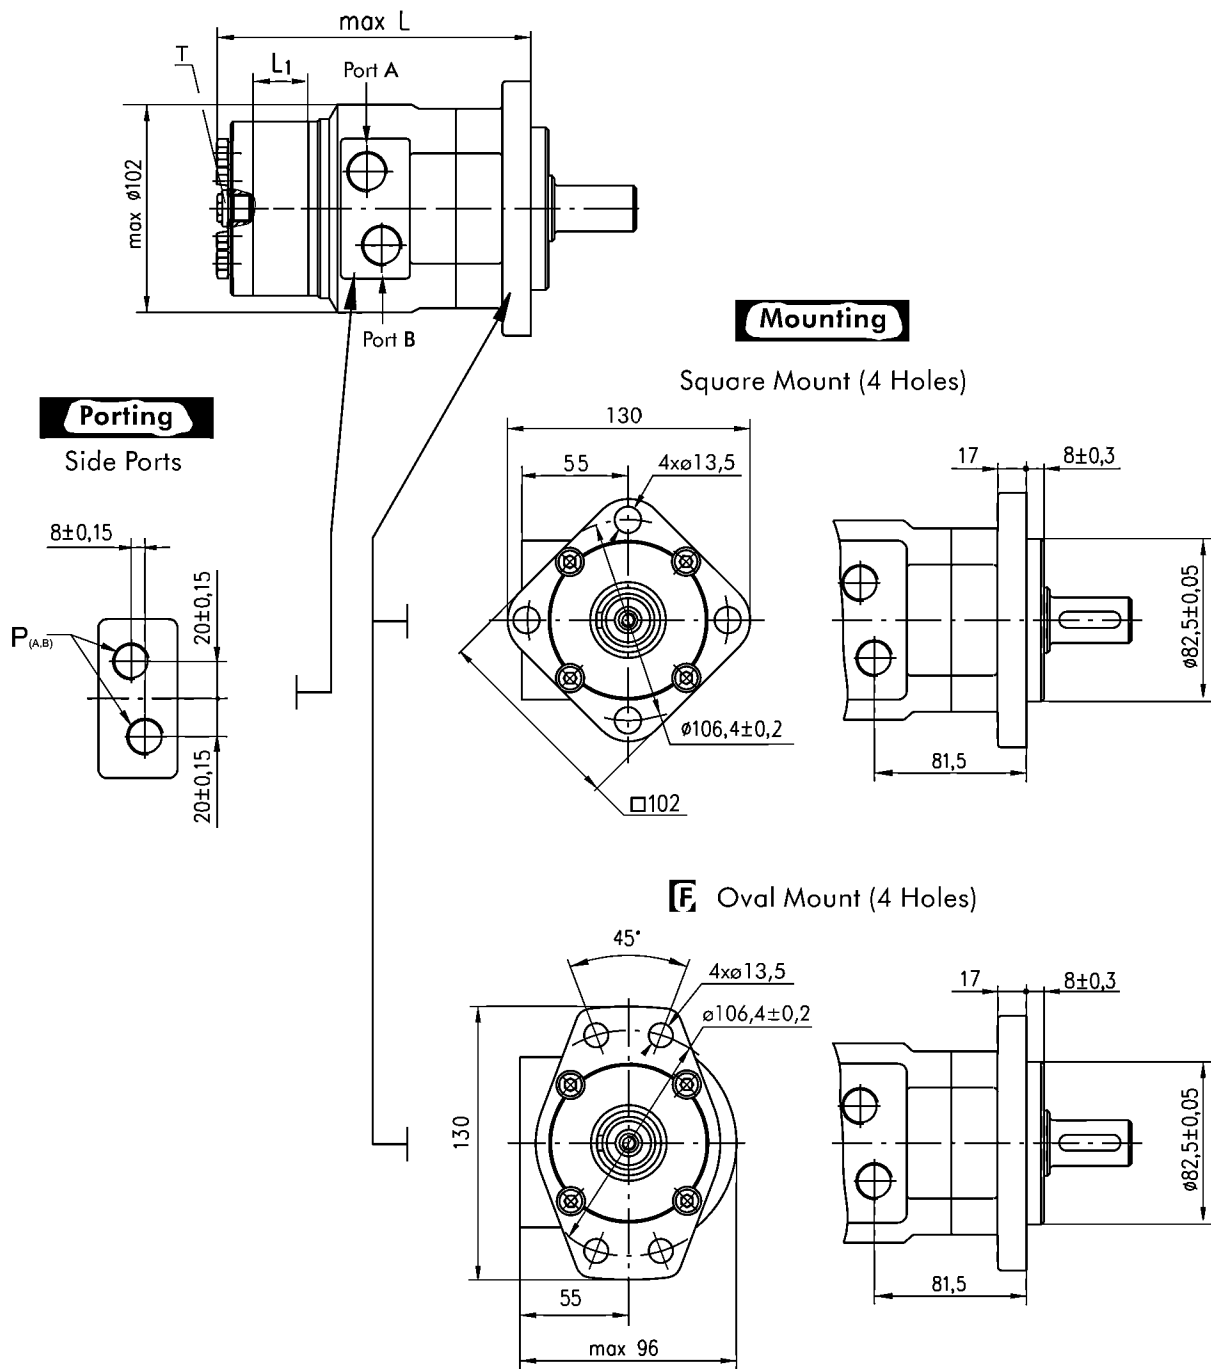

Type	L, mm	L ₁ , mm
OPL 50	148	6,67
OPL 80	152	10,67
OPL 100	155	13,33
OPL 125	158	16,67
OPL 160	163	21,33
OPL 200	168	26,67
OPL 250	175	33,33
OPL 315	184	42,67
OPL 400	195	53,33


P_(A, B) : 2xG1/2 or 2xM22x1,5 - 15 mm depth
T : G1/4 or M14x1,5 - 12 mm depth (plugged)

Standard Rotation
 Viewed from Shaft End
 Port A Pressurized - CW
 Port B Pressurized - CCW


Reverse Rotation
 Viewed from Shaft End
 Port A Pressurized - CCW
 Port B Pressurized - CW

SHAFT EXTENSIONS


[C] - $\phi 25$ straight, Parallel key A8x7x30 DIN 6885
Max. Torque 44 daNm

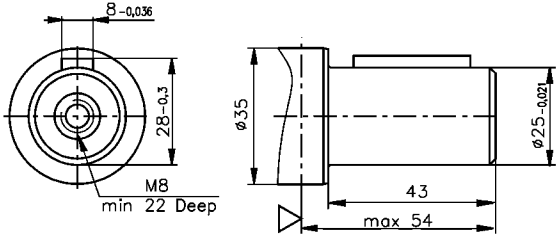


[SA] - splined B25x22 DIN 5482
Max. Torque 40 daNm

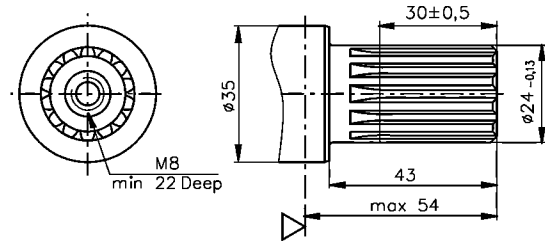


[CO] - $\phi 1"$ straight, Parallel key $1/4" \times 1/4" \times 1/4"$ BS46
Max. Torque 44 daNm

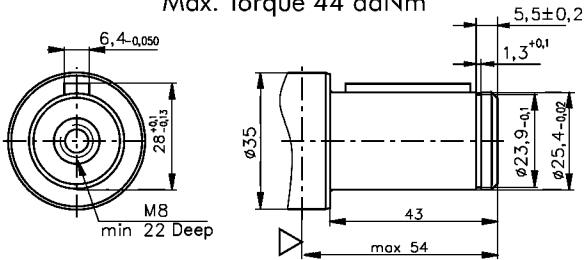


[CB] - $\phi 32$ straight, Parallel key A10x8x40 DIN 6885
Max. Torque 77 daNm

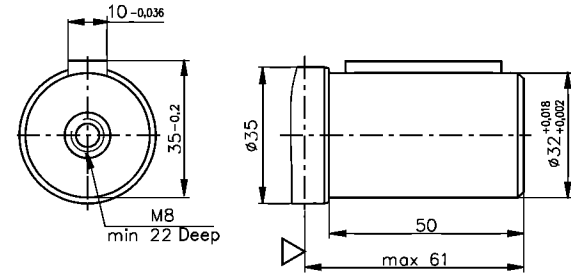

[SH] - splined, BS 2059 (SAE 6B)
Max. Torque 44 daNm


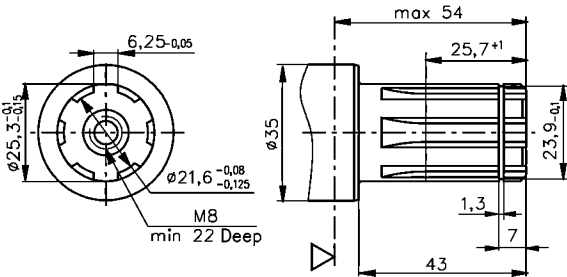


[HB] - $\phi 1 1/4"$ splined 14T, DP12/24 ANSI B92.1-1976
Max. Torque 77 daNm

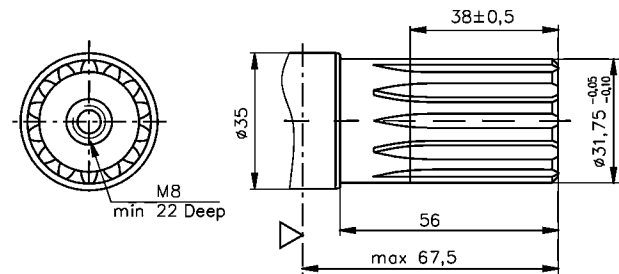


Permissible Shaft Loads EPML

[KB] - tapered 1:10, Woodruff key 6x9 DIN6888
Max. Torque 77 daNm

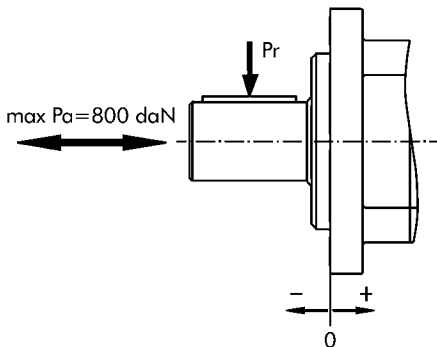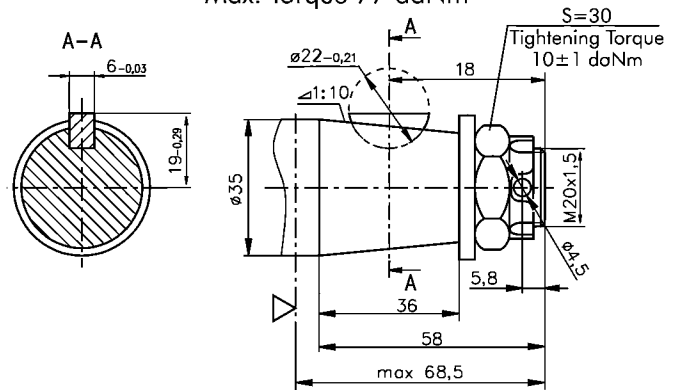

A- Static load
B- $P_a = 200$ daN
C- $P_a = 800$ daN

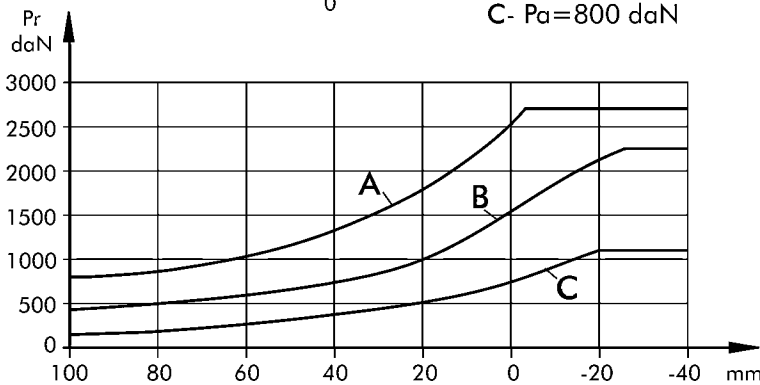

▽ - Motor Mounting Surface

ORDER CODE

	1	2	3	4	5	6	7	8
O P L								

Pos.1- Mounting Flange

omit - Square mount four holes

F -Oval mount, four holes

Pos.2- Displacement code*

50 - 49,5 [cm³/rev]

80 - 79,2 [cm³/rev]

100 - 99,0 [cm³/rev]

125 - 123,8 [cm³/rev]

160 - 158,4 [cm³/rev]

200 - 198,0 [cm³/rev]

250 - 247,5 [cm³/rev]

315 - 316,8 [cm³/rev]

400 - 396,0 [cm³/rev]

Pos.3- Shaft extensions**

C - ø25 straight, Parallel key A8x7x30 DIN6885

CO - ø1" straight, Parallel key ¼"x¼"x1¼" BS46

SH - ø25,3 splined BS 2059 (SAE 6B)

SA - ø24 splined B 25x22 DIN 5482

CB - ø32 straight, Parallel key A10x8x40 DIN6885

HB - ø1¼" splined 14T ANSI B92.1 - 1976

KB - ø35 tapered 1:10, Woodruff key 6x9 DIN6888

Pos.4- Ports

omit - BSPP (ISO 228)

M - Metric (ISO 262)

Pos.5- Special Features

omit - none

LL -Low Leakage

LSV - Low Speed Valve

FR - Free Running

Pos.6- Rotation

omit - Standard Rotation

R - Reverse Rotation

Pos.7- Option (Paint)***

omit - no Paint

P - Painted

PC - Corrosion Protected Paint

Pos.8- Design Series

omit - Factory specified

NOTES:


* See Function diagrams from page OP-06 to page OP-09.

** The permissible output torque for shafts must be not exceeded!

*** Color at customer's request.


The hydraulic motors are mangano-phosphatized as standard.

HYDRAULIC MOTORS ORL



APPLICATION

- » Conveyors;
- » Feeding mechanism of robots and manipulators;
- » Metal working machines;
- » Textile machines;
- » Machines for agriculture;
- » Food industries;
- » Mining machinery etc.



CONTENTS

Specification data ORL-02
 Function diagrams OR-06+10
 Dimensions and mounting ... ORL-03
 Shaft extensions ORL-04
 Permissible shaft loads ORL-04
 Order code ORL-05

OPTIONS

- » Model- Spool valve, roll-gerotor;
- » Antifriction conical bearings;
- » Flange mount;
- » Shafts- straight, splined and tapered;
- » Metric and BSPP ports;
- » Other special features.


GENERAL

Displacement,	[cm ³ /rev.]	51,5 ÷ 396
Max. Speed,	[RPM]	775 ÷ 150
Max. Torque,	[daNm]	10,1 ÷ 61
Max. Output,	[kW]	7 ÷ 13
Max. Pressure Drop,	[bar]	115 ÷ 175
Max. Oil Flow,	[l/min]	60
Min. Speed,	[RPM]	10
Permissible Shaft Loads,	[daN]	P _{rad} = 1500; P _a = 800
Pressure fluid		Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range,	[°C]	-30 ÷ 90
Optimal Viscosity range,	[mm ² /s]	20 ÷ 75
Filtration		ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

Oil flow in drain line

Pressure drop (bar)	Viscosity (mm ² /s)	Oil flow in drain line (l/min)
100	20	2,5
	35	1,8
140	20	3,5
	35	2,8

Pressure Losses

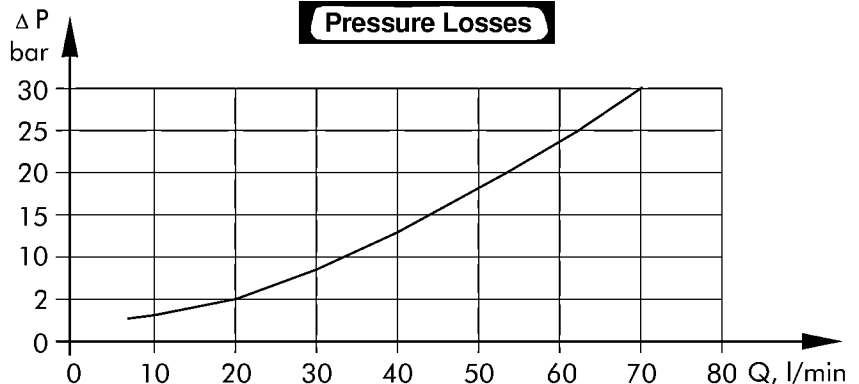

SPECIFICATION DATA

Type	ORL 50	ORL 80	ORL 100	ORL 125	ORL 160	ORL 200	ORL 250	ORL 315	ORL 400	
Displacement, [cm.³/rev.]	51,5	80,3	99,8	125,7	159,6	199,8	250,1	315,7	397	
Max. Speed, [RPM]	Cont.	775	750	600	475	375	300	240	190	150
	Cont. for "LSV" motors	200	200	200	200	200	200	200	190	150
	Int.*	970	940	750	600	470	375	300	240	190
	Int. for "LSV" motors*	250	250	250	250	250	250	250	240	190
Max. Torque [daNm]	Cont.	10,1	20,0	24,0	30,0	39,0	45,0	54,0	55,0	61,0
	Int.*	13,0	22,0	28,0	34,0	43,0	50,0	61,0	63,0	69,0
	Peak**	17,0	27,0	32,0	37,0	46,0	56,0	71,0	83,0	87,0
Max. Output [kW]	Cont.	7	12,5	13,0	12,5	11,5	11,0	10,0	9,0	7,8
	Cont. for "LSV" motors	3,6	4,0	5,0	6,2	7,8	8,9	10,5	9,8	7,7
	Int.*	8,5	15,0	15,0	16,0	14,0	13,0	12,0	11,0	10,6
	Int. for "LSV" motors*	4,7	5,7	7,3	7,9	10,7	12,0	13,9	13,8	11,8
Max. Pressure Drop [bar]	Cont.	140	175	175	175	175	175	175	135	115
	Int.*	175	200	200	200	200	200	200	160	140
	Peak**	225	225	225	225	225	225	225	210	175
Max. Oil Flow [l/min]	Cont.	40	60	60	60	60	60	60	60	60
	Cont. for "LSV" motors	10	16	20	25	32	40	50	60	60
	Int.*	50	75	75	75	75	75	75	75	75
	Int. for "LSV" motors*	12,5	20	25	32	40	50	62,5	75	75
Max. Inlet Pressure [bar]	Cont.	175	175	175	175	175	175	175	175	175
	Int.*	200	200	200	200	200	200	200	200	200
	Peak**	225	225	225	225	225	225	225	225	225
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line, [bar]	Cont. 0-100 RPM	100	100	100	100	100	100	100	100	100
	Cont. 100-300 RPM	50	50	50	50	50	50	50	50	50
	Cont. 300-600 RPM	25	25	25	25	25	25	25	25	25
	Cont. >600 RPM	15	15	15	15	15	15	15	15	15
	Int.* 0-max. RPM	100	100	100	100	100	100	100	100	100
Max. Return Pressure with Drain Line [bar]	Cont.	140	175	175	175	175	175	175	175	175
	Int.*	175	200	200	200	200	200	200	200	200
	Peak**	225	225	225	225	225	225	225	225	225
Max. Starting Pressure with Unloaded Shaft, [bar]		10	10	10	9	7	5	4	3	3
	for "LSV" motors	20	20	20	20	15	15	15	12	12
Min. Starting Torque [daNm]	8	15	20	25	32	37	45	45	49	
Min. Speed***, [RPM]	10	10	10	10	10	10	10	10	10	
Weight, [kg]	8,5	8,6	8,9	9,0	9,2	9,6	10,1	10,8	11,5	


* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 10 RPM or lower, consult factory or your regional manager.

1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommended using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 13 mm²/s at operating temperatures.
5. Recommended maximum system operating temperature is 82°C.
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

DIMENSIONS AND MOUNTING DATA

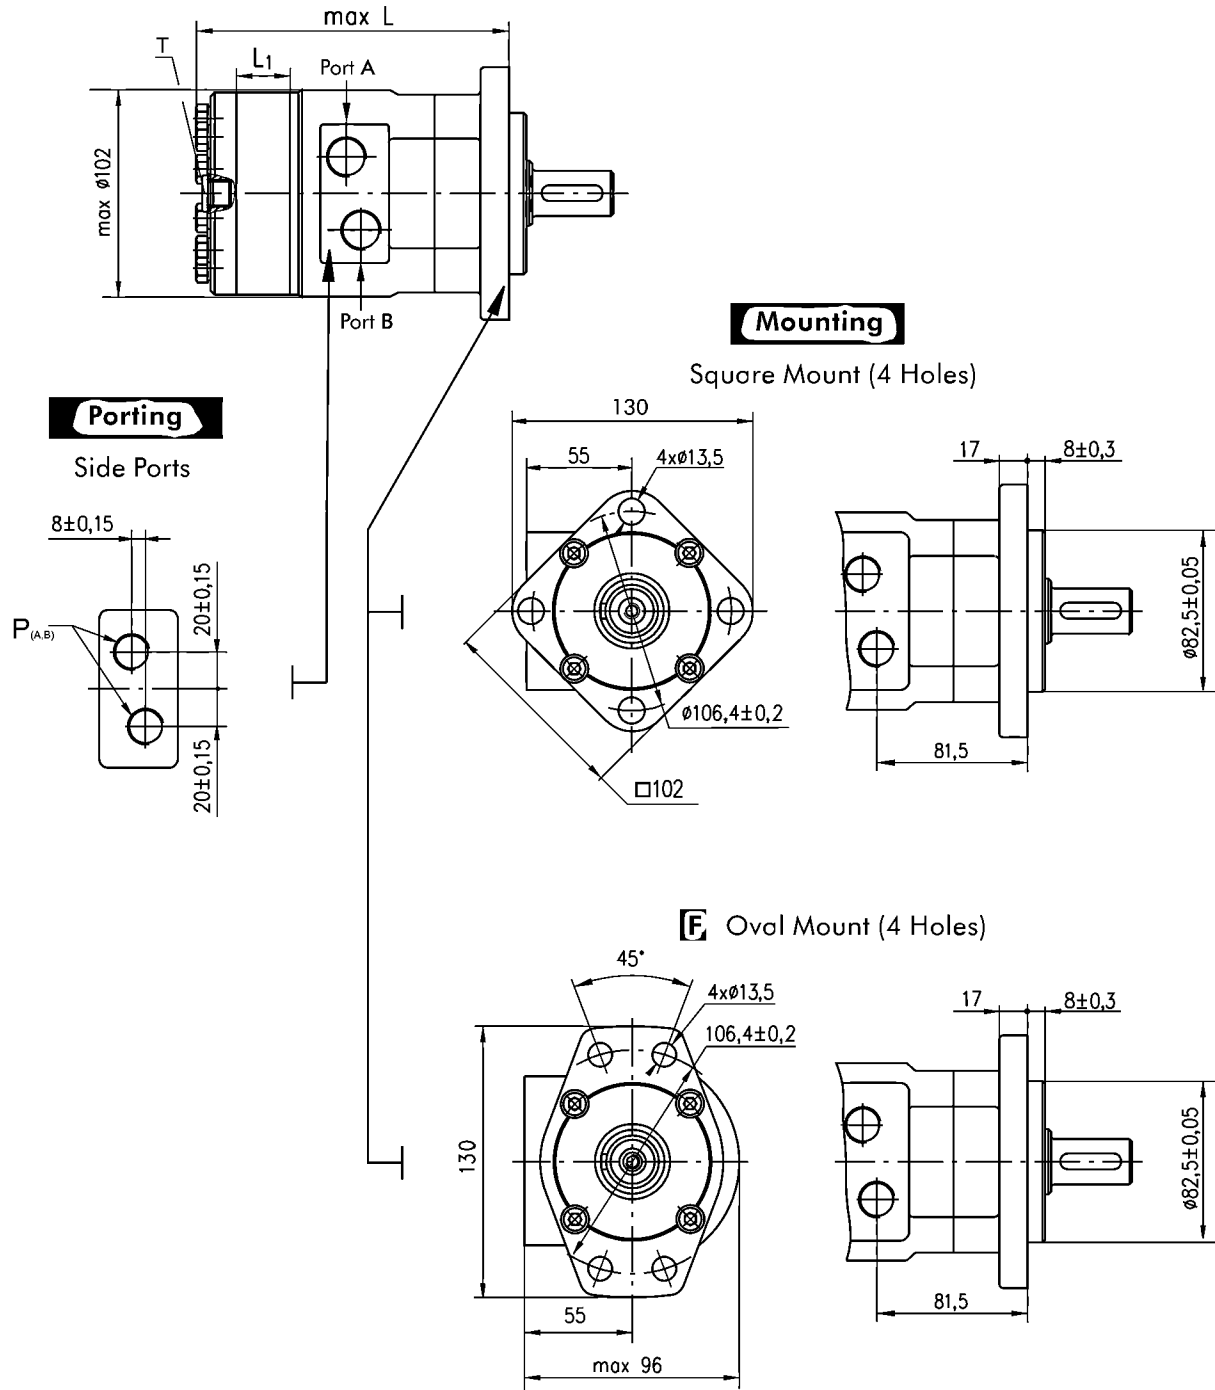

Type	L, mm	L ₁ , mm
ORL 50	152	9,0
ORL 80	157	14,0
ORL 100	160	17,4
ORL 125	165	21,8
ORL 160	171	27,8
ORL 200	178	34,8
ORL 250	187	43,5
ORL 315	198	54,8
ORL 400	212	69,4


P_(A,B) : 2xG1/2 or 2xM22x1,5 - 15 mm depth
T : G1/4 or M14x1,5 - 12 mm depth (plugged)

Standard Rotation
 Viewed from Shaft End
 Port A Pressurized - CW
 Port B Pressurized - CCW


Reverse Rotation
 Viewed from Shaft End
 Port A Pressurized - CCW
 Port B Pressurized - CW

SHAFT EXTENSIONS


[C] - $\varnothing 25$ straight, Parallel key A8x7x30 DIN 6885
Max. Torque 44 daNm

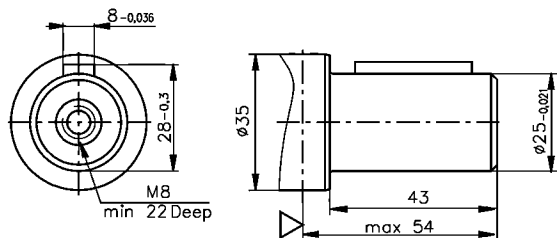


[CB] - $\varnothing 32$ straight, Parallel key A10x8x40 DIN 6885
Max. Torque 77 daNm

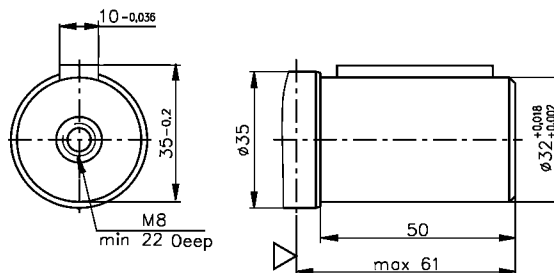


[SH] - splined, BS 2059 (SAE 6B)
Max. Torque 44 daNm

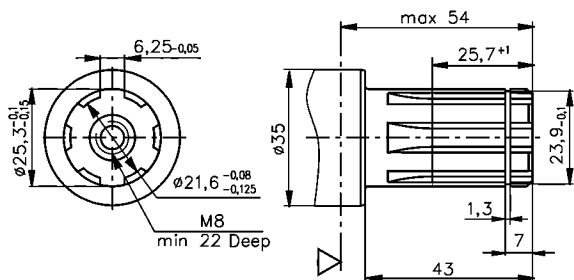

[HB] - $\varnothing 1\frac{1}{4}$ " splined 14T, DP12/24 ANSI B92.1-1976
Max. Torque 77 daNm

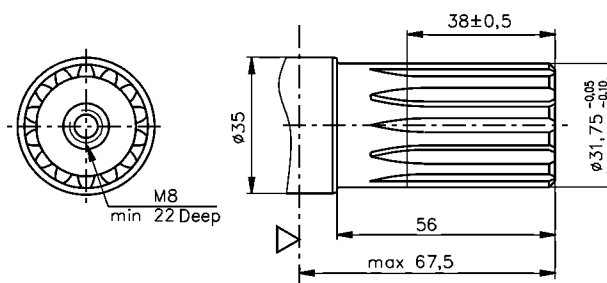


[KB] - tapered 1:10, woodruff key 6x9 DIN6888
Max. Torque 77 daNm

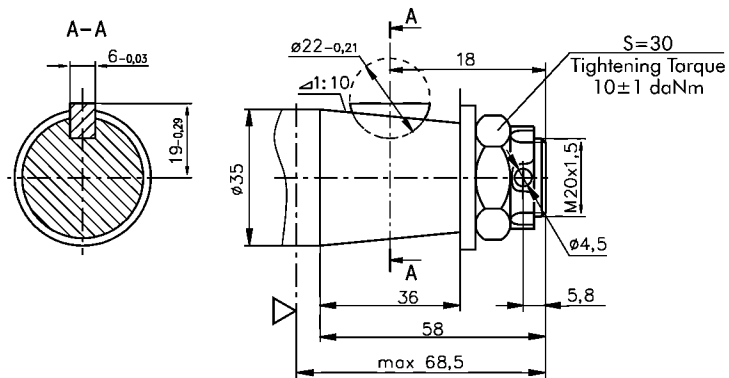


V- Motor Mounting Surface

Permissible Shaft Loads ORL

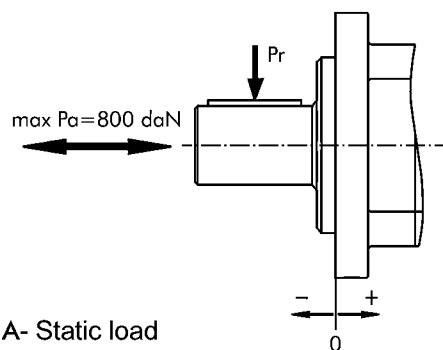

A- Static load
B- $P_a=200$ daN
C- $P_a=800$ daN

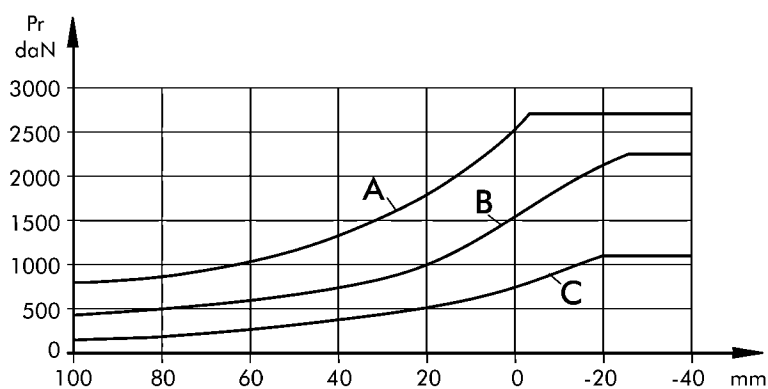



ORDER CODE

	1	2	3	4	5	6	7	8
O R L								

Pos.1- Mounting Flange

omit - Square mount, four holes

F - Oval mount, four holes

Pos.2- Displacement code*

50 - 51,5 [cm³/rev]

80 - 80,3 [cm³/rev]

100 - 99,8 [cm³/rev]

125 - 125,7 [cm³/rev]

160 - 159,6 [cm³/rev]

200 - 199,8 [cm³/rev]

250 - 250,1 [cm³/rev]

315 - 315,7 [cm³/rev]

400 - 397,0 [cm³/rev]

Pos.3- Shaft Extensions**

C - ø25 straight, Parallel key A8x7x30 DIN6885

CB - ø32 straight, Parallel key A10x8x40 DIN6885

SH - ø25,3 splined BS 2059 (SAE 6B)

HB - ø1¼" splined 14T ANSI B92.1 - 1976

KB - ø35 tapered 1:10, Woodruff key 6x9 DIN6888

Pos.4- Ports

omit - BSPP (ISO 228)

M - Metric (ISO 262)

Pos.5- Special Features

omit - none

LL - Low Leakage

LSV - Low Speed Valve (see Specification data)

FR - Free Running

Pos.6- Rotation

omit - Standard Rotation

R - Reverse Rotation

Pos.7- Option (Paint)***

omit - no Paint

P - Painted

PC - Corrosion Protected Paint

Pos.8- Design series

omit - Factory specified

NOTES:

* See Function diagrams from page OR-06 to page OR-10.

** The permissible output torque for shafts must be not exceeded!



*** Color at customer's request.

The hydraulic motors are mangano-phosphatized as standard.

LOW SPEED HIGH TORQUE MOTORS ORS

INTRODUCTION

The motor type ORS has low-speed distribution and they are most efficient at a high drop pressure operating. It's recommendable to use them at low speed rotation, i.e. at low supply flow.



OPTIONS

- » Model- Spool valve, orbiting roller;
- » Shafts- splined;
- » Shaft seal for high pressure;
- » Other special features.

APPLICATION


- » Conveyors;
- » Feeding mechanism of robots and manipulators;
- » Metal working machines;
- » Textile machines;
- » Machines for agriculture and forestry;
- » Wood working and sawmill machinery etc.

SPECIFICATION DATA

Code	Displacement [cm ³ /rev]	Max. Speed [RPM]	Max. Torque [daNm]		Max. Output [kW]		Max. Pressure Drop [bar]		Max. Oil Flow [lpm]
		cont.	cont.	int*	cont.	int*	cont.	int*	
ORS 50	51,5	775	10,0	13,0	8,2	9,7	140	175	40
ORS 80	80,3	750	15,7	19,5	8,2	9,7	140	175	60
ORS 100	99,8	600	19,8	24,0	8,2	9,7	140	175	60
ORS 125	125,7	475	25,0	30,0	8,2	9,7	140	175	60
ORS 160	159,6	375	32,0	39,0	8,2	9,7	140	175	60
ORS 200	199,8	300	34,4	47,0	8,2	12,7	125	175	60
ORS 250	229,0	240	34,5	46,5	7,9	12,0	110	150	60
ORS 300	277,0	190	34,5	45,7	6,8	9,3	90	125	60
ORS 400	369,0	150	39,0	50,2	5,4	7,8	80	105	60

* Intermittent operation: the permissible values may occur for max. 10% of every minute.



OUTLINE DIMENSIONS REFERENCE

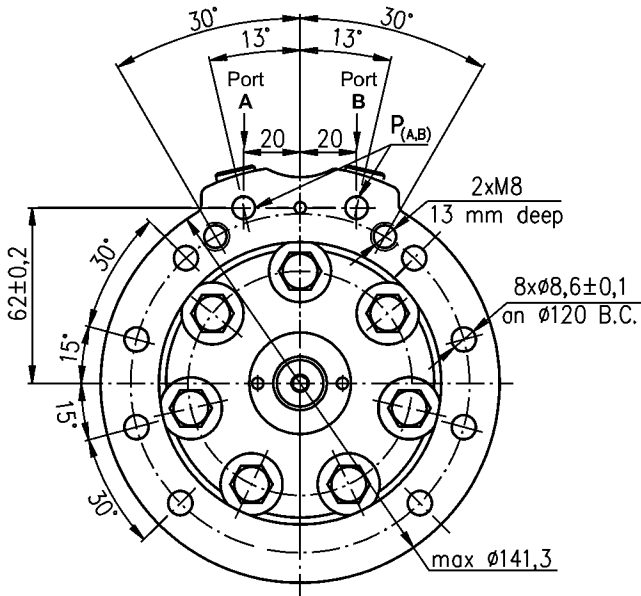

Type	L±0,5,in. [mm]	L ₁ ,in.[mm]
ORS 50	70,0	9,0
ORS 80	75,0	14,0
ORS 100	78,4	17,4
ORS 125	82,8	21,8
ORS 160	88,8	27,8
ORS 200	95,8	34,8
ORS 250	93,5	32,5
ORS 300	100,3	39,3
ORS 400	113,4	52,4

P_(A,B): 2xØ8
T : G1/4-A (plugged)

Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW

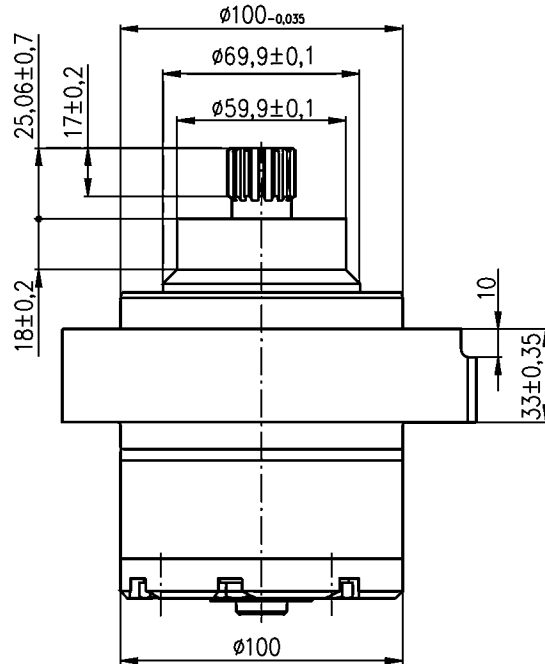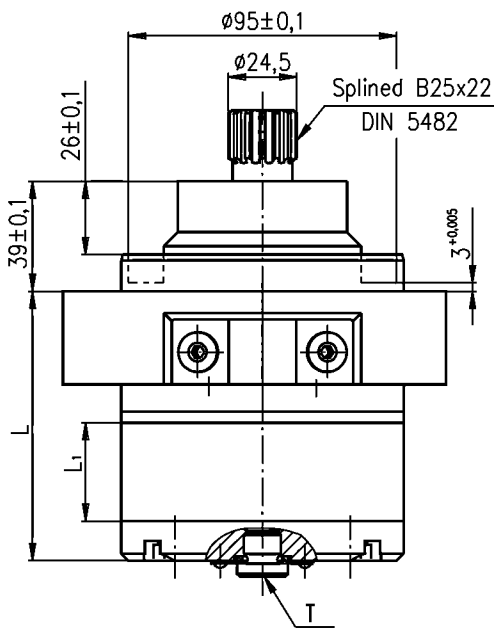

ORDER CODE

1	2	3	4
ORS			

Pos. 1 - Displacement code

50	- 51,5 [cm ³ /rev]
80	- 80,3 [cm ³ /rev]
100	- 99,8 [cm ³ /rev]
125	- 125,7 [cm ³ /rev]
160	- 159,6 [cm ³ /rev]
200	- 199,8 [cm ³ /rev]
250	- 229,0 [cm ³ /rev]
300	- 277,0 [cm ³ /rev]
400	- 369,0 [cm ³ /rev]

Pos. 2 - Rotation

omit - Standard Rotation
R - Reverse Rotation

Pos. 3 - Option (Paint)**

omit - no Paint
P - Painted
PC - Corrosion Protected Paint

Pos. 4 - Design Series


omit - Factory specified

NOTES:

* Color at customer's request.


The hydraulic motors are manganophosphated as standard.

HYDRAULIC MOTORS OH



APPLICATION

- » Conveyors;
- » Feeding mechanism of robots and manipulators;
- » Metal working machines;
- » Textile machines;
- » Machines for agriculture;
- » Food industries;
- » Mining machinery etc.



CONTENTS

Specification data OH-02
 Function diagrams OH-03+05
 Permissible shaft loads OH-05
 Dimensions and mounting ... OH-07
 Shaft extensions OH-07
 Order code OH-07

OPTIONS

- » Model- Spool valve, roll-gerotor
- » Flange mount;
- » Shafts- straight, splined and tapered;
- » Metric and BSPP ports;
- » Other special features.


GENERAL

Displacement,	[cm ³ /rev.]	201,3÷502,4
Max. Speed,	[RPM]	370÷150
Max. Torque,	[daNm]	51÷85
Max. Output,	[kW]	16÷11
Max. Pressure Drop,	[bar]	175÷125
Max. Oil Flow,	[l/min]	75
Min. Speed,	[RPM]	10÷5
Pressure fluid		Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range,	[°C]	-30÷90
Optimal Viscosity range,	[mm ² /s]	20÷75
Filtration		ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

Oil flow in drain line

Pressure drop (bar)	Viscosity (mm ² /s)	Oil flow in drain line (l/min)
100	20	2,5
	35	1,8
140	20	3,5
	35	2,8

Pressure Losses

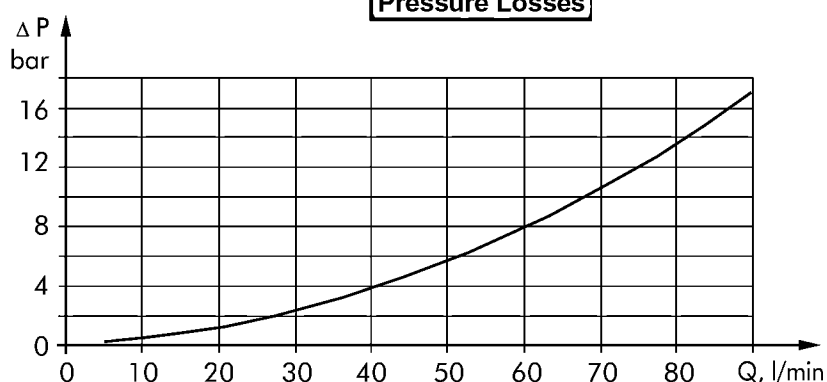



SPECIFICATION DATA

Type		OH 200	OH 250	OH 315	OH 400	OH 500
Displacement [cm³/rev.]		201,3	252	314,9	396,8	502,4
Max. Speed, [RPM]	cont.	370	295	235	185	150
	Int.*	445	350	285	225	180
Max. Torque [daNm]	cont.	51	61	74	84	85
	Int.*	58	70	82	98	104
	peak**	64	79	98	109	117
Max. Output [kW]	cont.	16	16	14	12,5	11
	Int.*	18,5	18,5	15,5	15	14
Max. Pressure Drop [bar]	cont.	175	175	175	155	125
	Int.*	200	200	200	190	160
	peak**	225	225	225	210	180
Max. Oil Flow [l/min]	cont.	75	75	75	75	75
	Int.*	90	90	90	90	90
Max. Inlet Pressure [bar]	cont.	200	200	200	200	200
	Int.*	225	225	225	225	225
	peak**	250	250	250	250	250
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line , [bar]	cont. 0-100 RPM	100	100	100	100	100
	cont. 100-200 RPM	50	50	50	50	50
	cont. 200-300 RPM	20	20	20	20	20
	Int.* 0-max. RPM	100	100	100	100	100
Max. Starting Pressure with Unloaded Shaft, [bar]		5	5	5	5	5
Min. Starting Torque [daNm]	at max. press. drop cont.	39	52	66	72	72
	at max. press. drop Int.*	45	59	73	88	88
Min. Speed***, [RPM]		10	10	8	5	5
Weight, [kg]		10,5	11	11,5	12,3	13

* Intermittent operation: the permissible values may occur for max. 10% of every minute.


** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 5 RPM lower than given, consult factory or your regional manager.


- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil, HLP(DIN51524) or HM(ISO6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 13 mm²/s at 50°C.
- 5) Recommended maximum system operating temperature is 82°C.
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

FUNCTION DIAGRAMS

OH 200

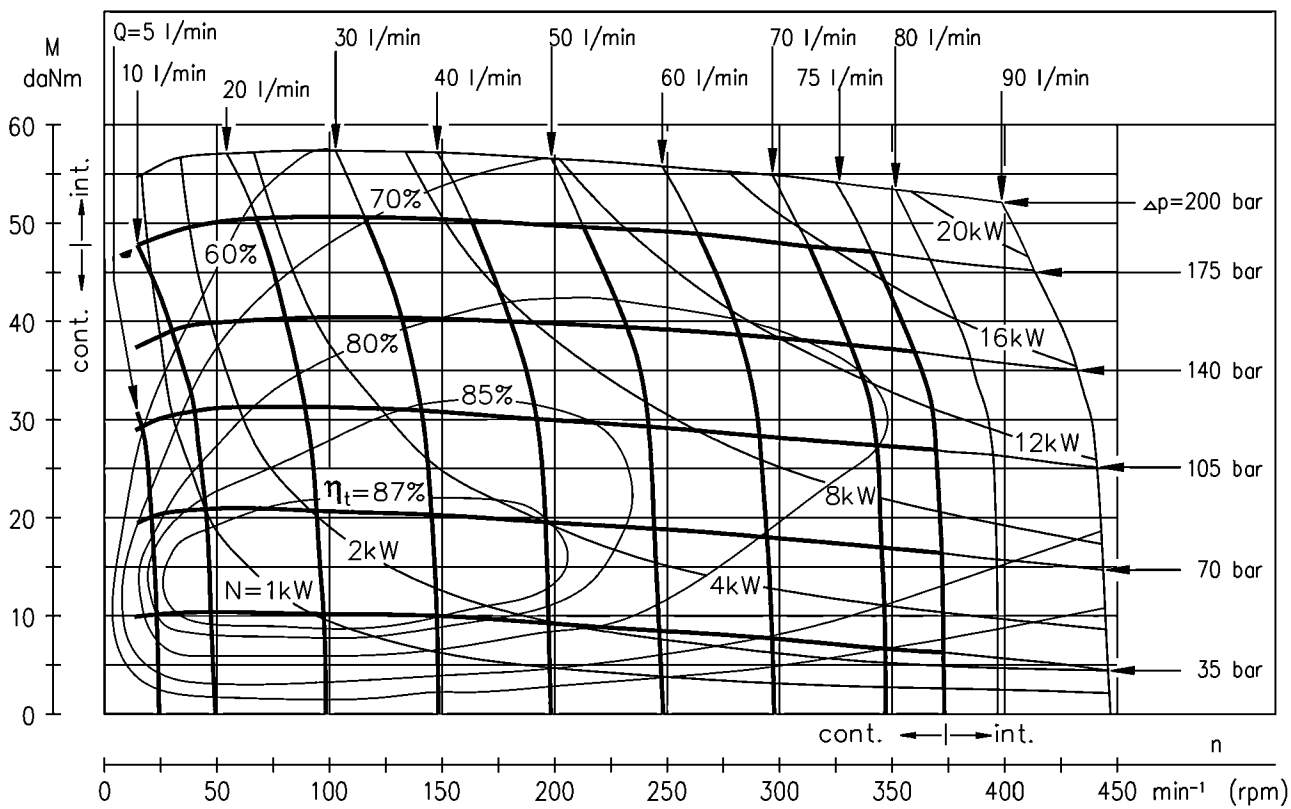


OH 250

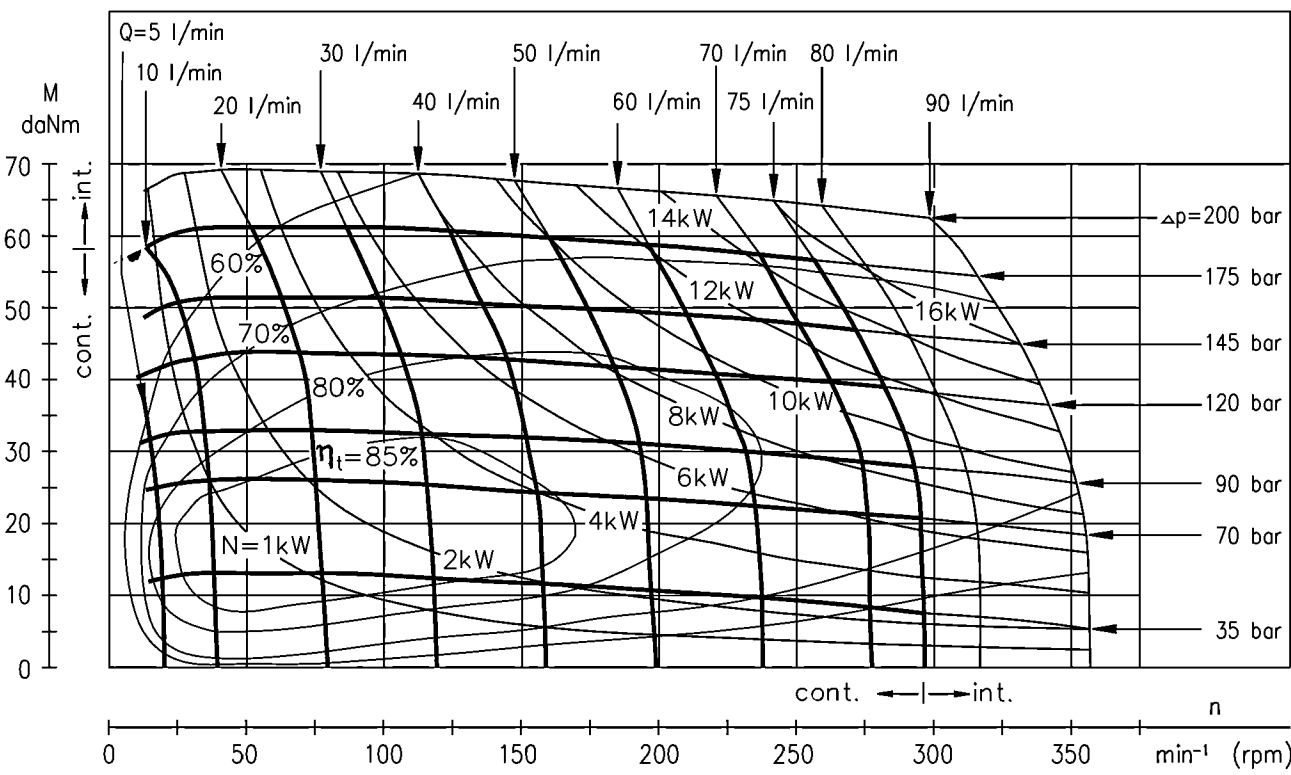


The function diagrams data was collected at back pressure 5±10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OH 315

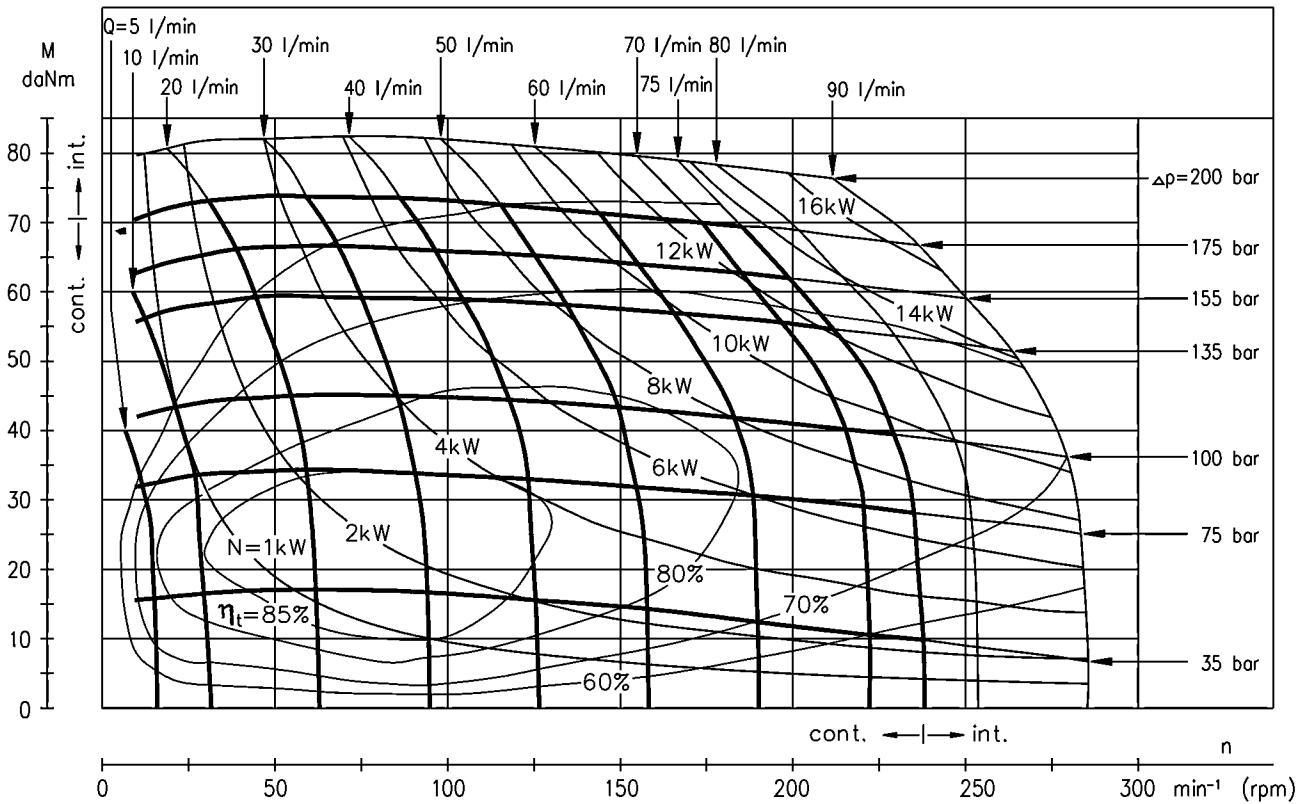


OH 400

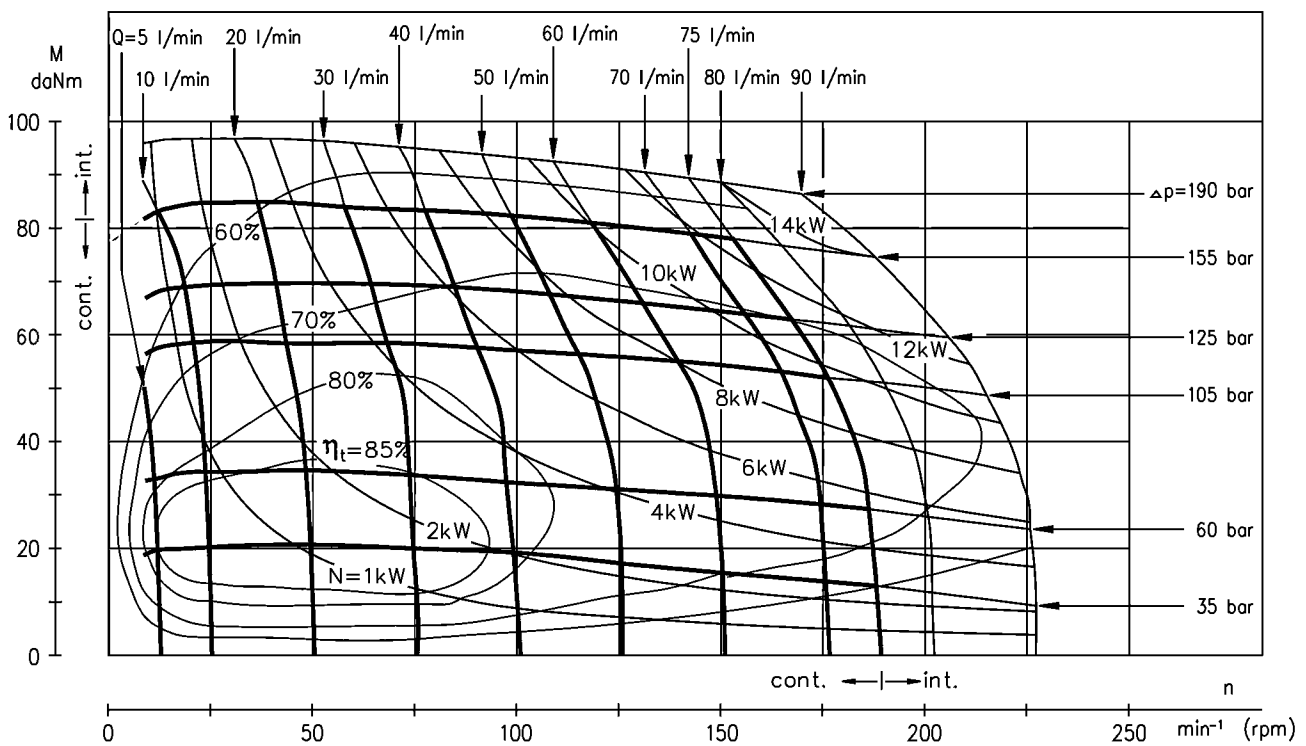

The function diagrams data was collected at back pressure 5÷10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OH 500

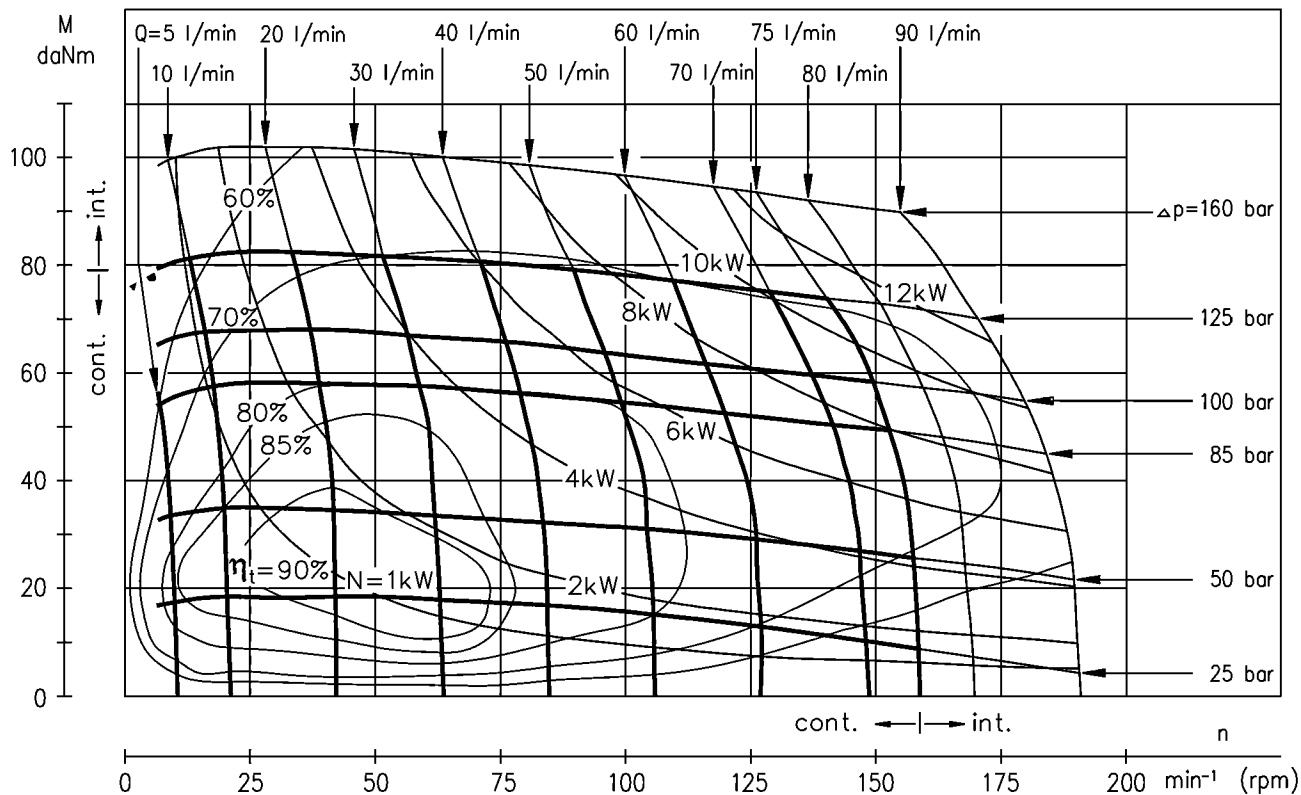



The function diagrams data was collected at back pressure 5+10 bar and oil with viscosity of 32 mm²/s at 50° C.

PERMISSIBLE SHAFT LOADS FOR OH MOTORS

The permissible radial shaft load P_{rad} depends on the speed (RPM) and distance (L) from the point of load to the mounting flange.



$$\text{Radial Shaft Load } P_{rad} = \frac{1100}{n} \times \frac{25000}{103,5+L}, \text{ daN}^*$$

* $L < 60 \text{ mm}; n \geq 200 \text{ min}^{-1}$

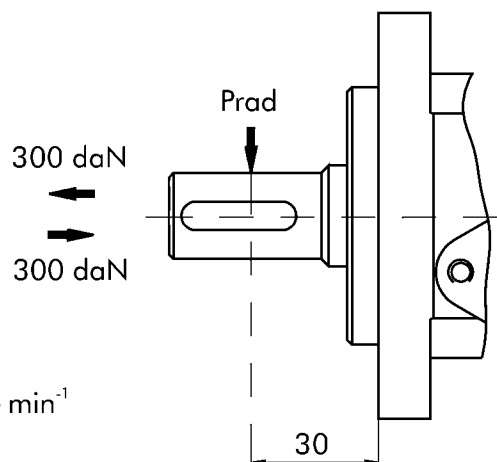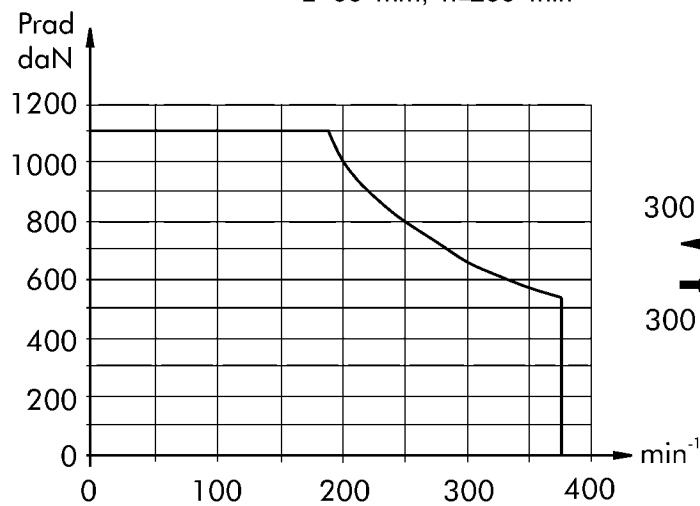

DIMENSIONS

Magneto Maunt (4 holes)

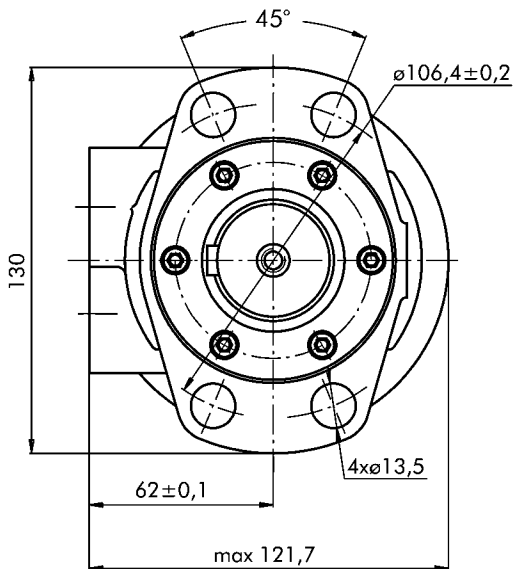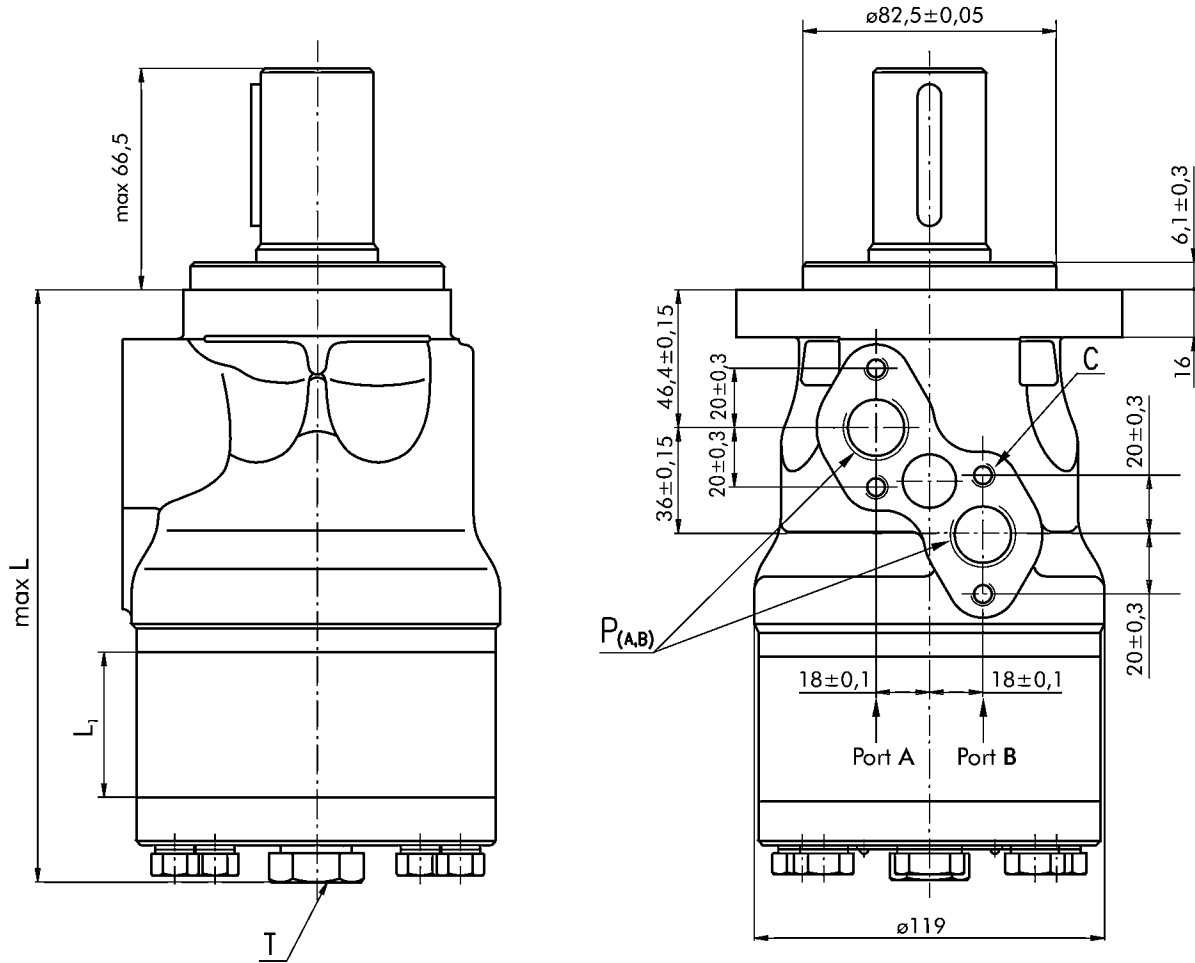

Type	L, mm	L ₁ , mm
OH 200	170,8	27,8
OH 250	177,8	34,8
OH 315	186,5	43,5
OH 400	197,8	54,8
OH 500	212,4	69,4

C : 4xM8-13mmdepth

P_(A,B): 2xG1/2 or 2xM22x1,5-15 mm depth

T : G1/4 or M14x1,5-12 mm depth (plugged)

Standard Rotation

Viewed from Shaft End

Port A Pressurized - CW

Port B Pressurized - CCW

Reverse Rotation


Viewed from Shaft End

Port A Pressurized - CCW


Port B Pressurized - CW

SHAFT EXTENSIONS


C - $\varnothing 32$ straight, Parallel key A10x8x45 DIN 6885
Max. Torque 77 daNm

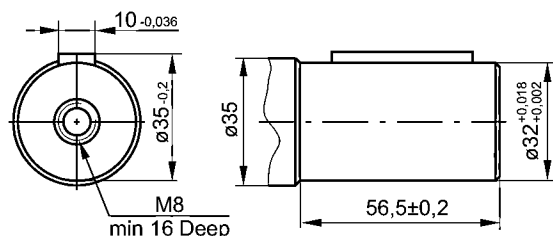


SH - $\varnothing 1\frac{1}{4}$ " splined 14T, DP 12/24 ANSI B92.1-1976
Max. Torque 95 daNm

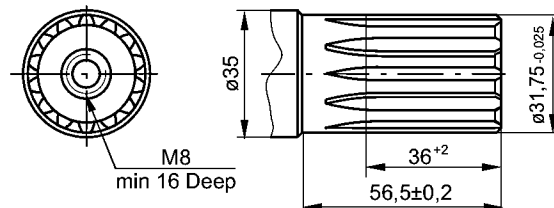

CB - $\varnothing 35$ straight, Parallel key A10x8x45 DIN 6885
Max. Torque 95 daNm

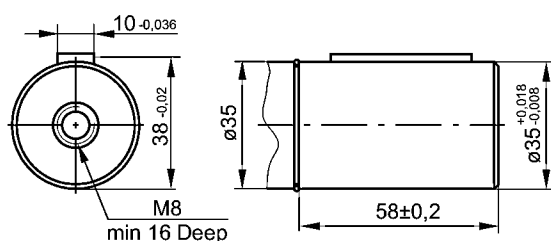

K - tapered 1:10, Parallel key B6x6x20 DIN 6885
Max. Torque 95 daNm

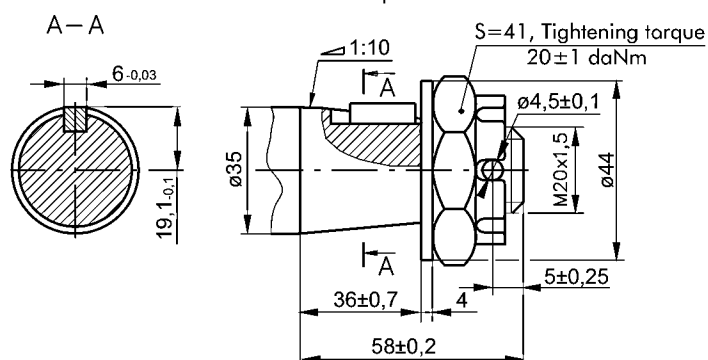

ORDER CODE

	1	2	3	4	5	6	7
O H							

Pos. 1 - Displacement code

- 200** - 201,3 [cm³/rev]
- 250** - 252,0 [cm³/rev]
- 315** - 314,9 [cm³/rev]
- 400** - 396,8 [cm³/rev]
- 500** - 502,4 [cm³/rev]

Pos. 2 - Shaft Extensions *

- C** - $\varnothing 32$ straight, Parallel key A10x8x45 DIN 6885
- SH** - $\varnothing 1\frac{1}{4}$ " splined 14T ANSI B92.1-1970
- CB** - $\varnothing 35$ straight, Parallel key A10x8x45 DIN 6885
- K** - $\varnothing 35$ tapered 1:10, Parallel key B6x6x20 DIN 6885

Pos. 3 - Ports

- omit - BSPP (ISO 228)
- M** - Metric (ISO 262)

Pos. 4 - Special Features

- omit - none
- LL** - Low Leakage
- LSV** - Low Speed Valve
- FR** - Free Running

Pos. 5 - Rotation

- omit - Standard Rotation
- R** - Reverse Rotation

Pos. 6 - Option (Paint)**

- omit - no Paint
- P** - Painted
- PC** - Corrosion Protected Paint

Pos. 7 - Design Series

- omit - Factory specified

NOTES:


* The permissible output torque for shafts must be not exceeded!

** Color at customer's request.

The hydraulic motors are mangano-phosphatized as standard.




HYDRAULIC MOTORS OS



APPLICATION

- » Conveyors;
- » Metal working machines;
- » Machines for agriculture;
- » Road building machines;
- » Mining machinery;
- » Food industries;
- » Special vehicles etc.



CONTENTS

Specification data.....	OS-02÷04
Function diagrams.....	OS-05÷08
Dimensions and mounting	OS-09÷10
Wheel motor.....	OS-11
Motor with Drum brake- OSB	OS-12
Shaft extensions	OS-13
Tacho connection	OS-13
Permissible shaft loads	OS-14
Function diagram for OSSB	OS-14
Dimensions and mounting-OSS, OSV, OSZ...	OS-15÷17
Internal Spline data	OS-17
Order code	OS-22

OPTIONS

- » Model- Disc valve, roll-gerotor
- » Flange and wheel mount;
- » Short motor;
- » Motor with Drum Brake;
- » Tacho and speed sensor connection;
- » Side and rear ports
- » Shafts- straight, splined and tapered;
- » Metric and BSPP ports;
- » Other special features.


GENERAL

Displacement, [cm ³ /rev.]	80,5÷711,9
Max. Speed, [RPM]	810÷105
Max. Torque, [daNm]	23,5÷58
Max. Output, [kW]	19,5÷5,4
Max. Pressure Drop, [bar]	200÷55
Max. Oil Flow, [l/min]	75
Min. Speed, [RPM]	10÷5
Permissible Shaft Loads, [daN]	$P_{rad}=1500; P_a=500$
Pressure fluid	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range, [°C]	-30÷90
Optimal Viscosity range, [mm ² /s]	20÷75
Filtration	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

Oil flow in drain line

Pressure drop (bar)	Viscosity (mm ² /s)	Oil flow in drain line (l/min)
140	20	1,5
	35	1
210	20	3
	35	2

Pressure Losses

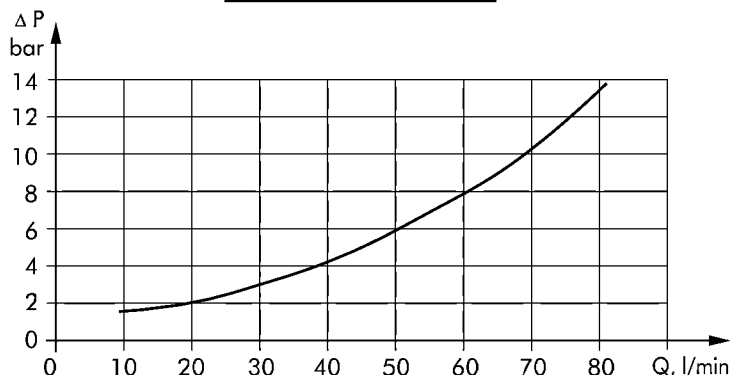

SPECIFICATION DATA

Type	OS 80	OS 100	OS 125	OS 160	OS 200	
Displacement [cm³/rev.]	80,5	100	125,7	159,7	200	
Max. Speed, [RPM]	cont.	810	750	600	470	375
	Int.*	1000	900	720	560	450
Max. Torque [daNm]	cont.	20	25	32	40	46
	Int.*	24	30	38	48	60
	peak**	26	32	40	51	65
Max. Output [kW]	cont.	16	17,5	17,5	17,5	15,5
	int.*	19	21	21	21	22
Max. Pressure Drop [bar]	cont.	175	175	175	175	160
	Int.*	210	210	210	210	210
	peak**	250	250	225	225	225
Max. Oil Flow [l/min]	cont.	65	75	75	75	75
	Int.*	80	90	90	90	90
Max. Inlet Pressure [bar]	cont.	210	210	210	210	210
	Int.*	250	250	250	250	250
	peak**	300	300	300	300	300
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line, [bar]	cont. 0-100 RPM	100	100	100	100	100
	cont. 100-300 RPM	50	50	50	50	50
Max. Return Pressure with Drain Line [bar]	cont. >300 RPM	20	20	20	20	20
	Int.* 0-max. RPM	100	100	100	100	100
Max. Starting Pressure with Unloaded Shaft, [bar]	cont.	140	140	140	140	140
	Int.*	175	175	175	175	175
	peak**	210	210	210	210	210
Min. Starting Torque [daNm]	at max. press. drop cont.	12	10	10	8	8
	at max. press. drop Int.*	16,5	20,5	26	28	33
Min. Speed***, [RPM]		19,5	25	31	39	41
Weight, [kg]	OSFE	10	10	8	8	6
	OSWE	9,8[10,2]	10[10,4]	10,3[10,7]	10,7[11,1]	11,1[11,5]
	OSZE	10,3[10,7]	10,5[10,9]	10,8[11,2]	11,2[11,6]	11,6[12]
	OSVE	7,8[8,2]	8[8,4]	8,3[8,7]	8,7[9,1]	9,1[9,5]
	OSQE	5,7[6,1]	5,9[6,3]	6,2[6,6]	6,6[7]	7[7,4]
	OSBE	10,2[10,6]	10,4[10,8]	10,7[11,1]	11,1[11,5]	11,5[11,9]
		16,8[17,2]	17,0[17,4]	17,3[17,7]	17,7[18,1]	18,1[18,5]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 5 RPM lower than given, consult factory or your regional manager.

- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 13mm²/s at operating temperatures.
- 5) Recommended maximum system operating temperature is 82°C.
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.



SPECIFICATION DATA (continued)

Type	OS 250	OS 315	OS 400	OS 475	OS 525	OS 565	
Displacement [cm³/rev.]	250	314,9	397	474,6	522,7	564,9	
Max. Speed, [RPM]	cont.	300	240	185	160	145	130
	Int.*	360	290	230	190	175	160
Max. Torque [daNm]	cont.	50	63	67	58	58	58
	Int.*	63	79	79	68	69	69
	peak**	69	84	85	84	85	85
Max. Output [kW]	cont.	13,5	11,0	10,5	8,4	7,6	6,9
	int.*	19	18	15	11,3	10,4	9,6
Max. Pressure Drop [bar]	cont.	140	140	120	85	80	75
	Int.*	175	175	140	100	90	85
	peak**	200	185	140	115	105	100
Max. Oil Flow [l/min]	cont.	75	75	75	75	75	75
	Int.*	90	90	90	90	90	90
Max. Inlet Pressure [bar]	cont.	210	210	210	210	210	210
	Int.*	250	250	250	250	250	250
	peak**	300	300	300	300	300	300
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line, [bar]	cont. 0-100 RPM	100	100	100	100	100	100
	cont. 100-300 RPM	50	50	50	50	50	50
	cont. >300 RPM	-	-	-	-	-	-
	Int.* 0-max. RPM	100	100	100	100	100	100
Max. Return Pressure with Drain Line [bar]	cont.	140	140	140	140	140	140
	Int.*	175	175	175	175	175	175
	peak**	210	210	210	210	210	210
Max. Starting Pressure with Unloaded Shaft, [bar]	8	8	8	8	8	8	
Min. Starting Torque [daNm]	at max. press. drop cont.	36	44	47	47	47	47
	at max. press. drop Int.*	44	52	55	55	55	55
Min. Speed***, [RPM]	6	5	5	5	5	5	
Weight, [kg]	OSFE	11,6[12]	12,3[12,7]	13,2[13,6]	14[14,4]	14,9[15,3]	14,9[15,3]
	OSWE	12,1[12,5]	12,8[13,2]	13,7[14,1]	14,5[14,9]	15,4[15,8]	15,4[15,8]
	OSZE	9,6[10]	10,3[10,7]	11,2[11,6]	12[12,4]	12,9[13,3]	12,9[13,3]
	OSVE	7,5[7,9]	8,2[8,6]	9,1[9,5]	9,9[10,3]	10,8[11,2]	10,8[11,2]
	OSQE	12[12,4]	12,7[13,1]	13,6[14]	14,4[14,8]	15,3[15,7]	15,3[15,7]
	OSBE	18,6[19]	19,3[19,7]	20,2[20,6]	21[21,4]	21,9[22,3]	21,9[22,3]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 5 RPM lower than given, consult factory or your regional manager.

- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 13mm²/s at operating temperatures.
- 5) Recommended maximum system operating temperature is 82 °C.
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

SPECIFICATION DATA for OS...LSV

Low Speed Valve (LSV) "LSV" Series hydraulic motors have been designed to operate with normal pressure drop and to ensure smooth run at low speed (up to 200 min⁻¹), as the best security for operation is guaranteed at frequency of rotation 20 ÷ 50 min⁻¹. They have an increased starting pressure drop and are not recommended for using at pressure less than 40 bars.

Look at specification data for hydraulic motors standard version. The modification concerns only the following parameters : maximum speed , maximum output, maximum Oil flow and maximum starting pressure.

Type		OS 80	OS 100	OS 125	OS 160	OS 200	OR 250	OS 315	OS 400
Max. Speed, [RPM]	Cont.	200	200	200	200	200	200	200	185
	Int.*	250	250	250	250	250	250	250	225
Max. Output [kW]	Cont.	4,6	6,0	7,4	8,0	8,0	8,8	10,6	9,5
	Int.*	6,5	8,4	10,0	12,2	12,4	13,4	15,0	12,8
Max. Oil Flow [l/min]	Cont.	16	20	25	32	40	50	65	75
	Int.*	20	25	32	40	50	62,5	80	90
Max. Starting Pressure with Unloaded Shaft, [bar]		25	20	20	15	15	15	15	15

SPECIFICATION DATA for OS...LL

Low Leakage (LL) "LL" Series hydraulic motors have been designed to operate at the whole standard range of working conditions (pressure drop and frequency of rotation), but with considerable decreased volumetric losses in the drainage ports. Their main purpose is to operate as series-connected motors in hydraulic systems.


For this version is permissible decreasing of the maximal torque with up to 5% (at middle speed) and up to 10% (at high speed) in comparison to the standard versions of motors.

Look at specification data for hydraulic motors standard version. The modification concerns only the parameters: maximum torque, maximum output, minimum starting torque.


Type		OS 80	OS 100	OS 125	OS 160	OS 200	OS 250	OS 315	OS 400
Max. Torque [daNm]	Cont.	22,9	28,5	36,4	33,2	39,0	43,8	52,6	56,5
	Int.*	25,2	31,1	39,6	46,8	48,8	52,6	61,4	67,2
Max. Output [kW]	Cont.	17,8	19,3	19,3	14,8	13,3	11,8	10,9	9,5
	Int.*	19,3	21,3	21,4	20,0	16,6	14,2	12,8	12,3
Min. Starting Torque [daNm]	Cont.	18,7	23,2	29,6	27,3	32,2	35,1	43,0	45,8
	Int.*	20,3	25,9	32,3	38,0	40,0	43,0	50,7	53,6

FUNCTION DIAGRAMS

OS 80

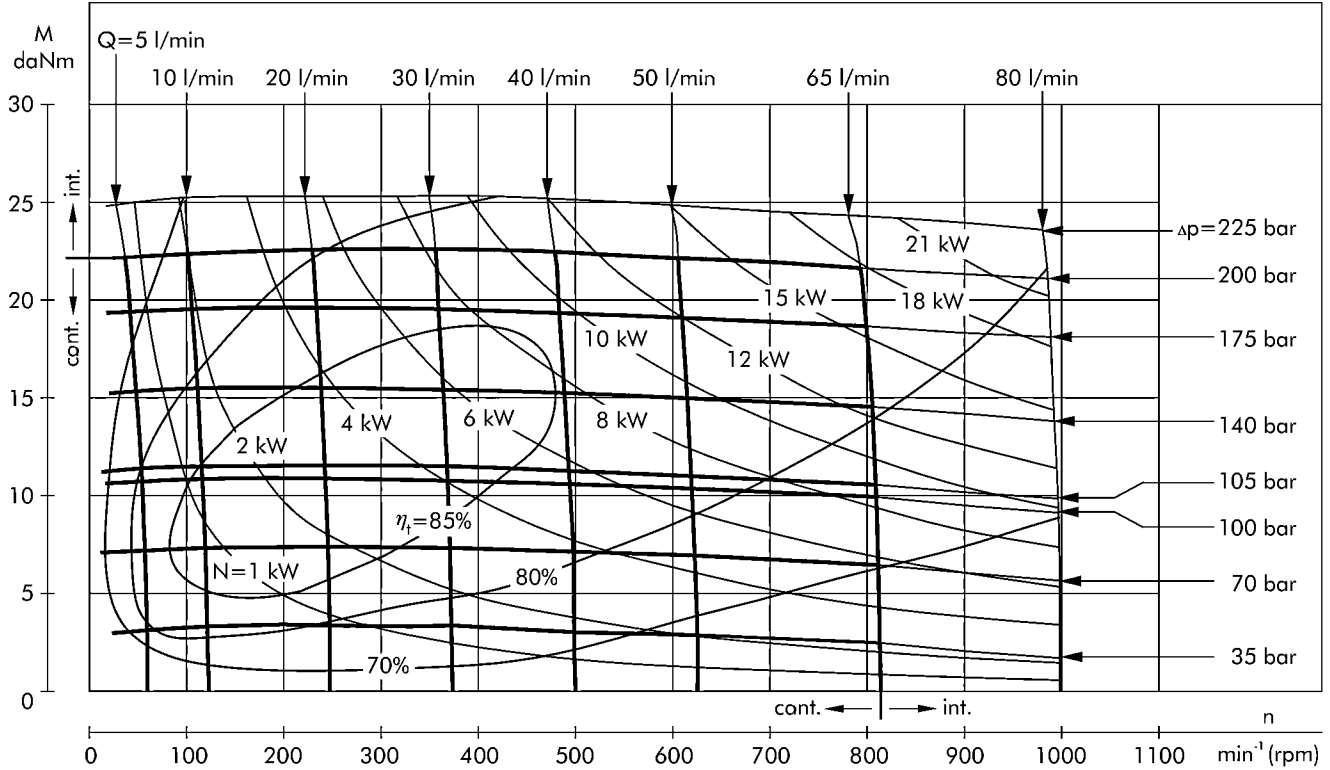


OS 100

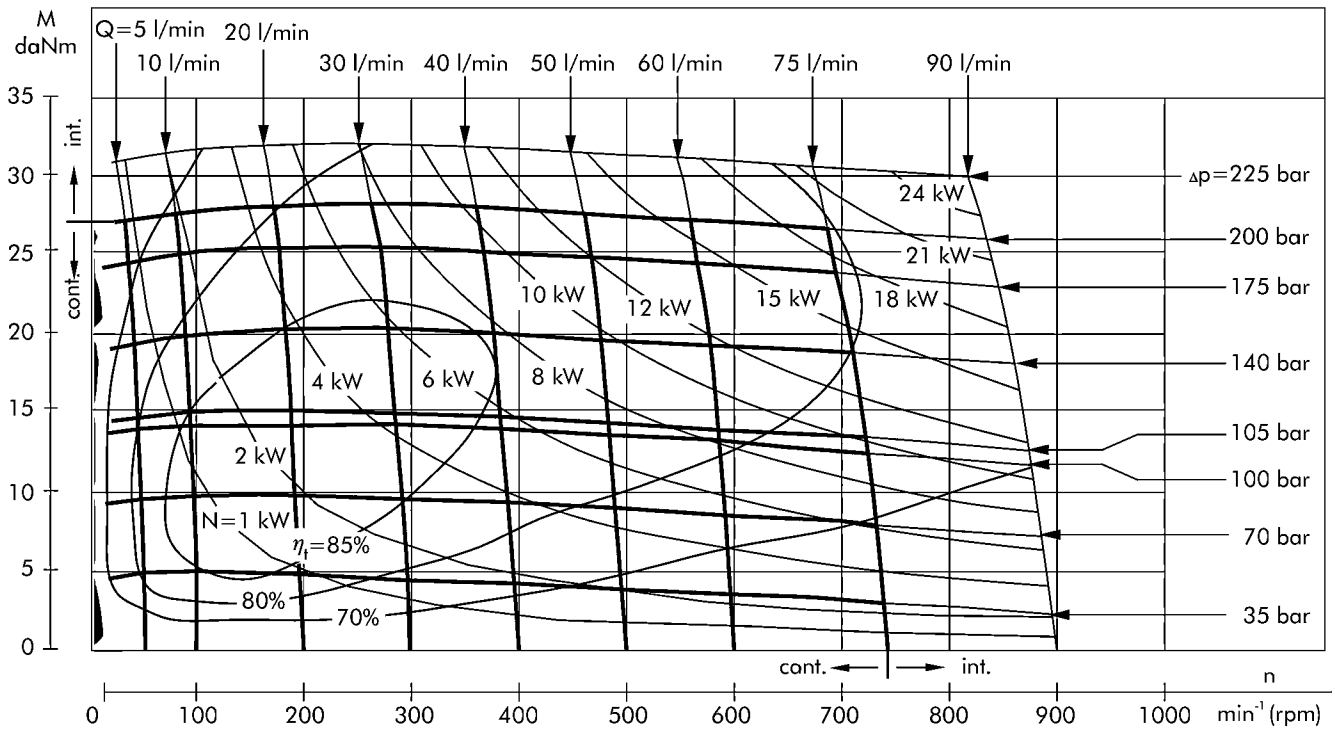


The function diagrams data was collected at back pressure 5÷10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OS 125

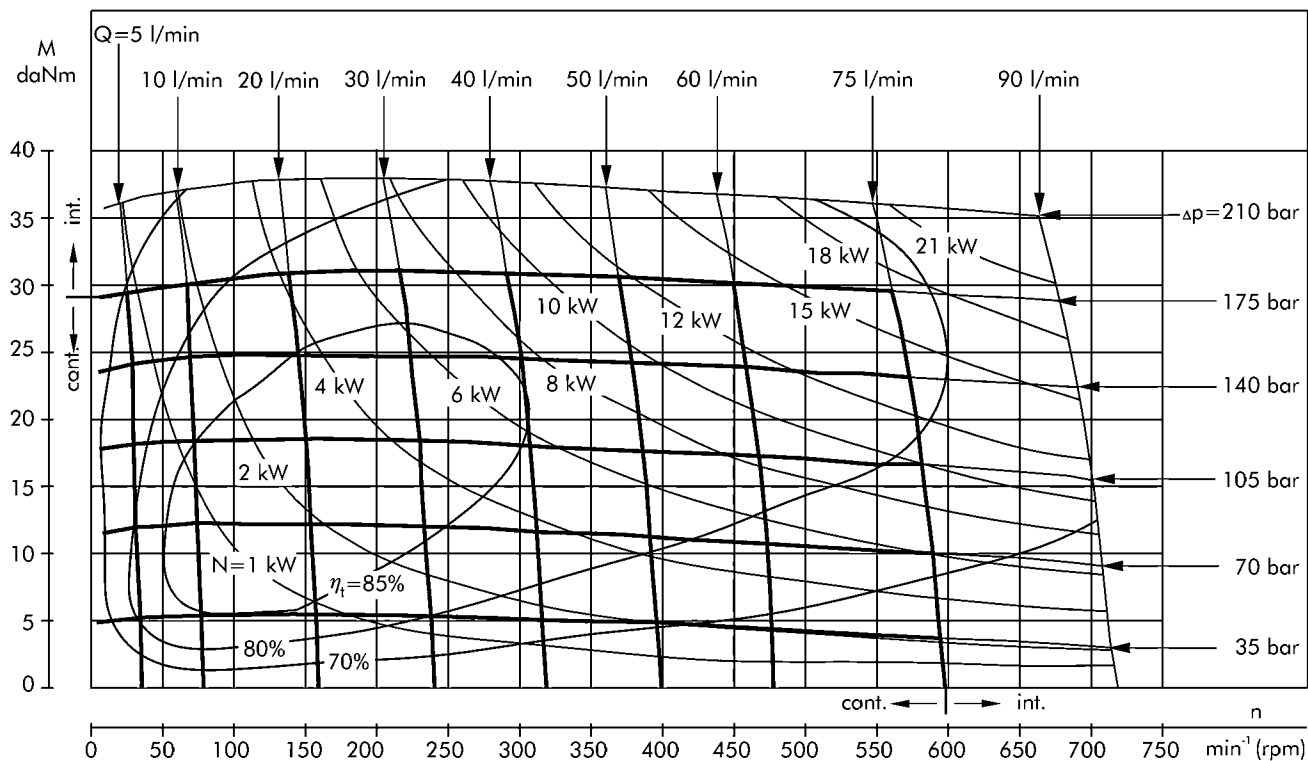


OS 160

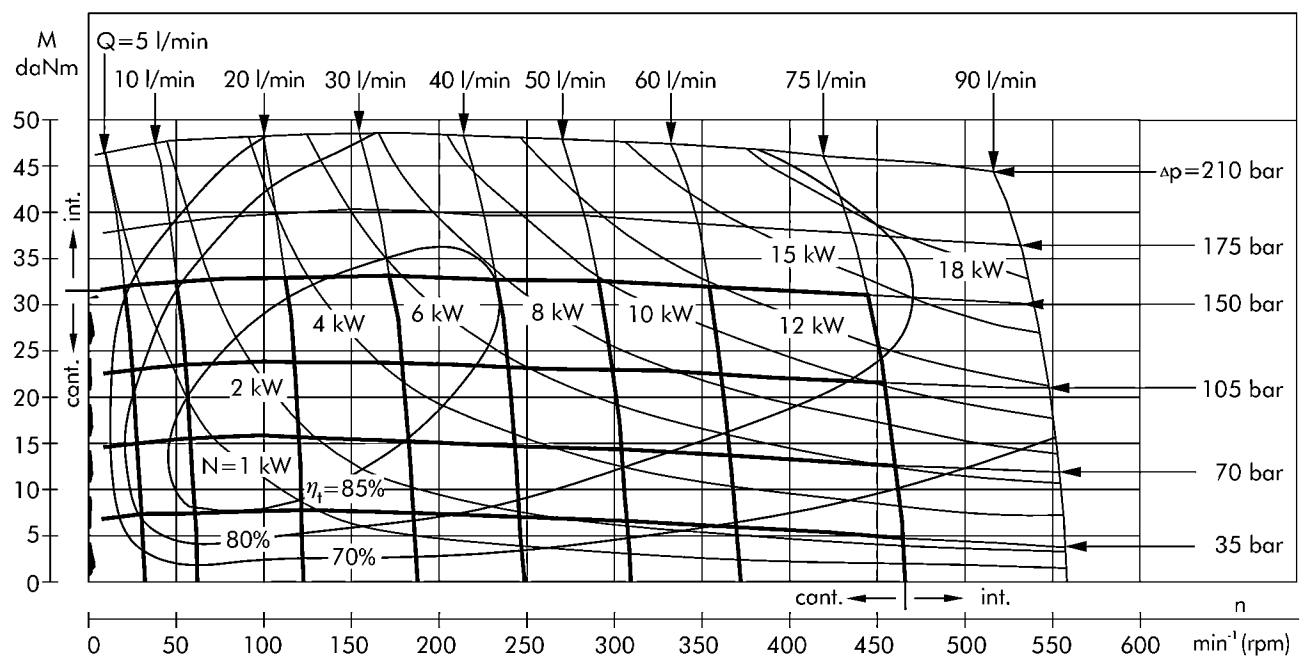


The function diagrams data was collected at back pressure 5±10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OS 200

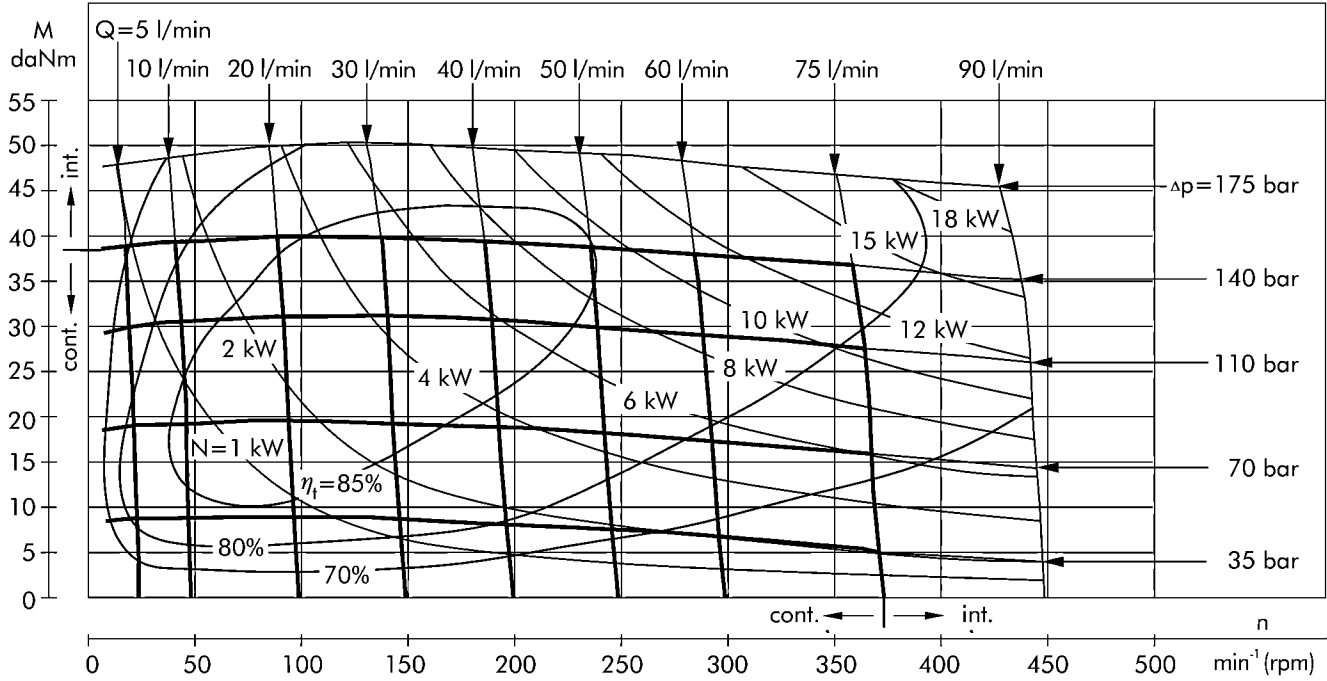


OS 250

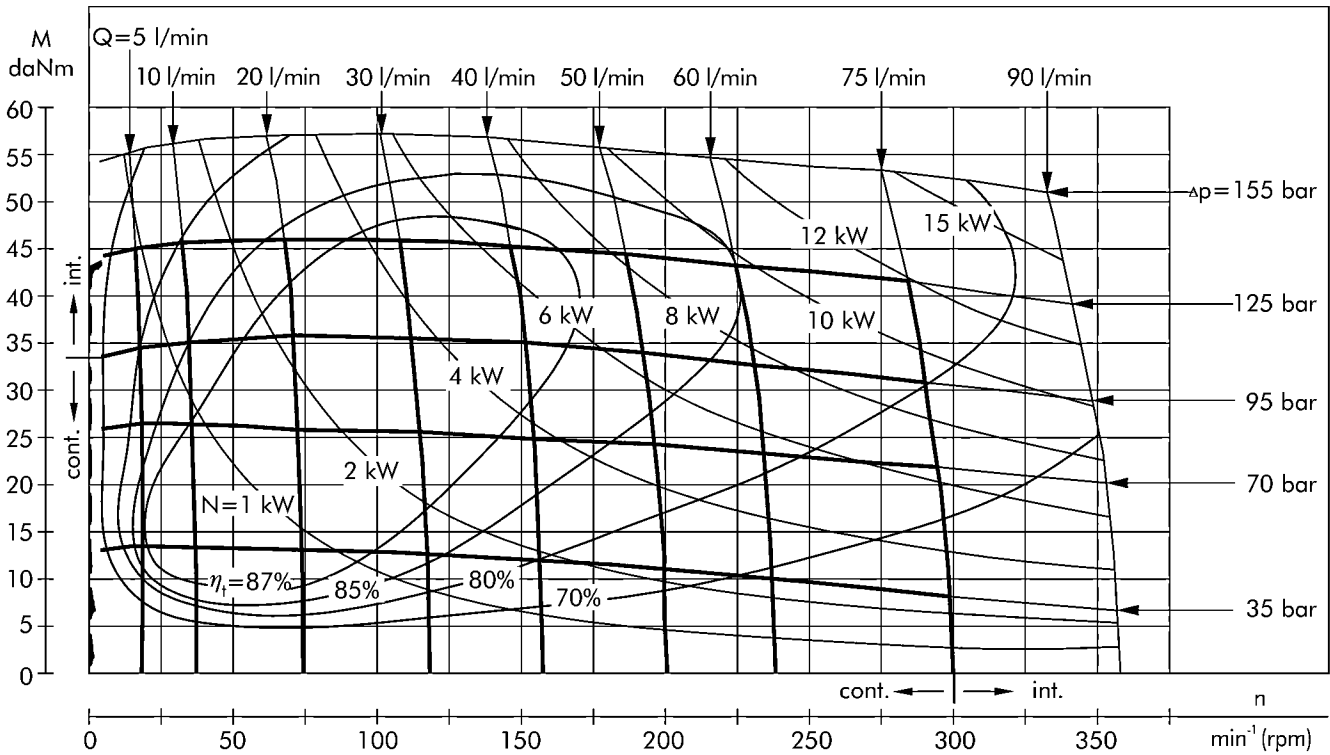


The function diagrams data was collected at back pressure 5±10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OS 315

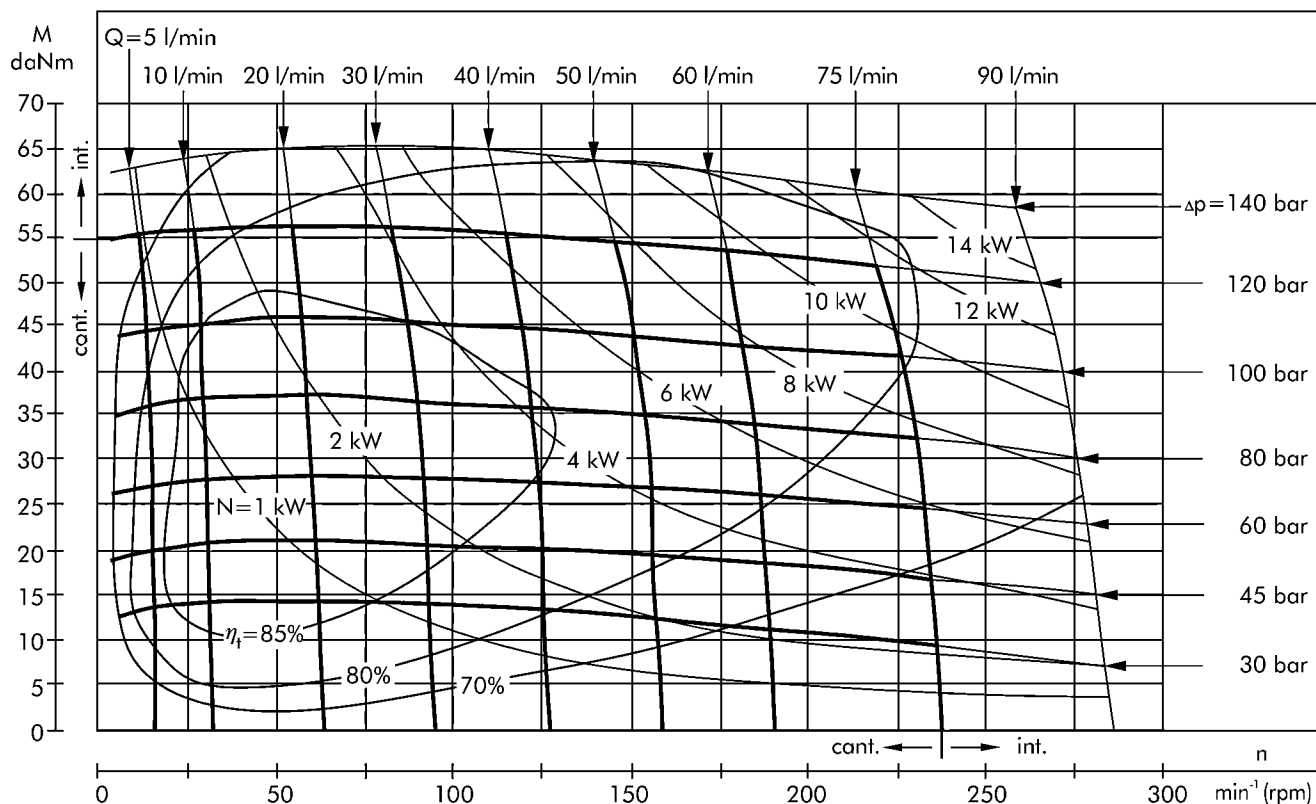


OS 400

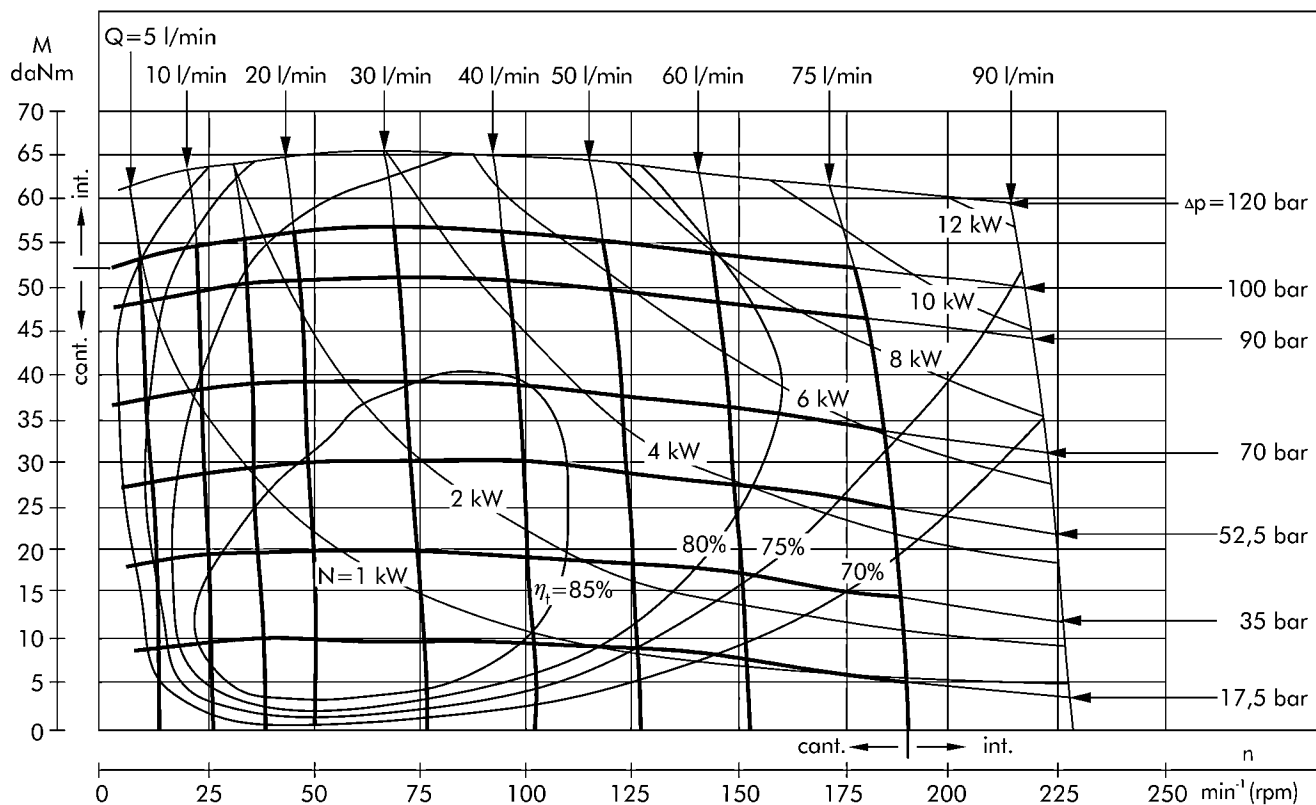

The function diagrams data was collected at back pressure 5+10 bar and oil with viscosity of 32 mm²/s at 50° C.

DIMENSIONS AND MOUNTING DATA

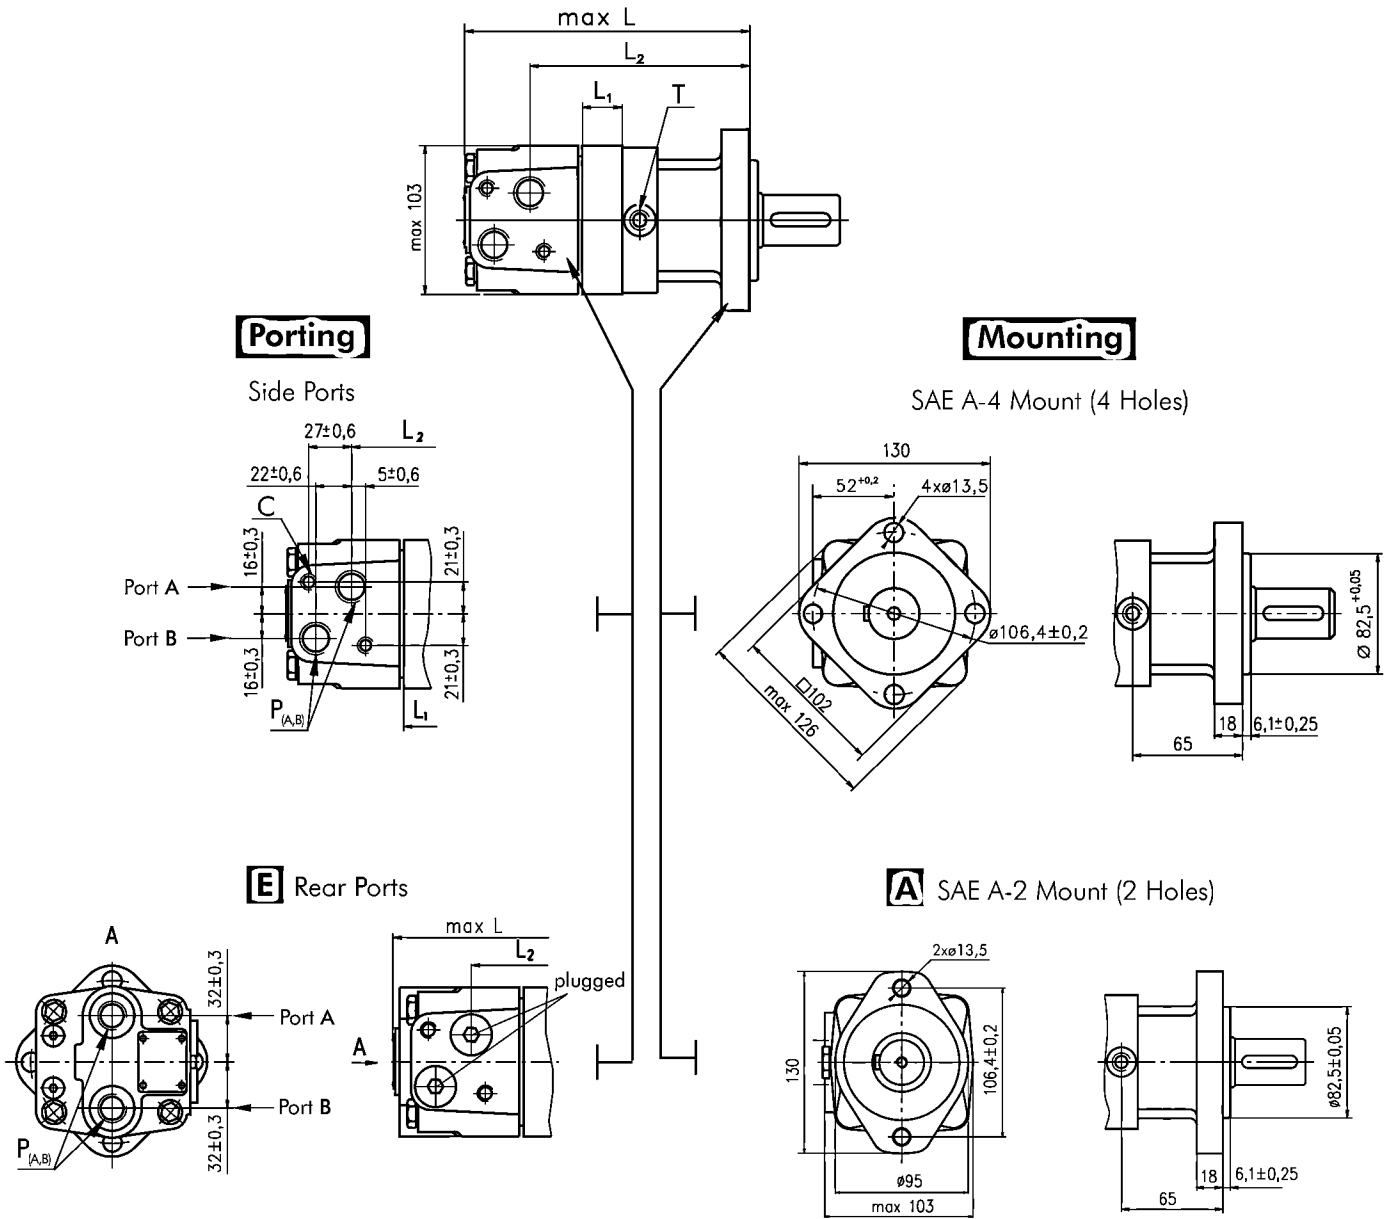

C: 2xM10-12 mm depth
P_(A,B): 2xG1/2 or 2xM22x1,5-15 mm depth
T: G ¼ or M14x1,5- 12 mm depth (plugged)


Standard Rotation
 Viewed from Shaft End
 Port A Pressurized - CW
 Port B Pressurized - CCW

Reverse Rotation
 Viewed from Shaft End
 Port A Pressurized - CCW
 Port B Pressurized - CW

Type	L, mm	L ₂ , m m	Type	L, mm	*L ₁ , m m
OS(A) 80	166	121	OS(A)E 80	173	11
OS(A) 100	169	125	OS(A)E 100	177	14,4
OS(A) 125	174	129	OS(A)E 125	181	18,8
OS(A) 160	180	135	OS(A)E 160	187	24,8
OS(A) 200	187	142	OS(A)E 200	194	31,8
OS(A) 250	195	151	OS(A)E 250	203	40,5
OS(A) 315	207	162	OS(A)E 315	214	51,8
OS(A) 400	221	176	OS(A)E 400	228	66,4
OS(A) 475	235	190	OS(A)E 475	242	79,6
OS(A) 565	250	206	OS(A)E 565	257	95,3
OS(A) 715	276	231	OS(A)E 715	283	121,2

* The width of the gerolor is 3 mm greater than L₁.

DIMENSIONS AND MOUNTING DATA

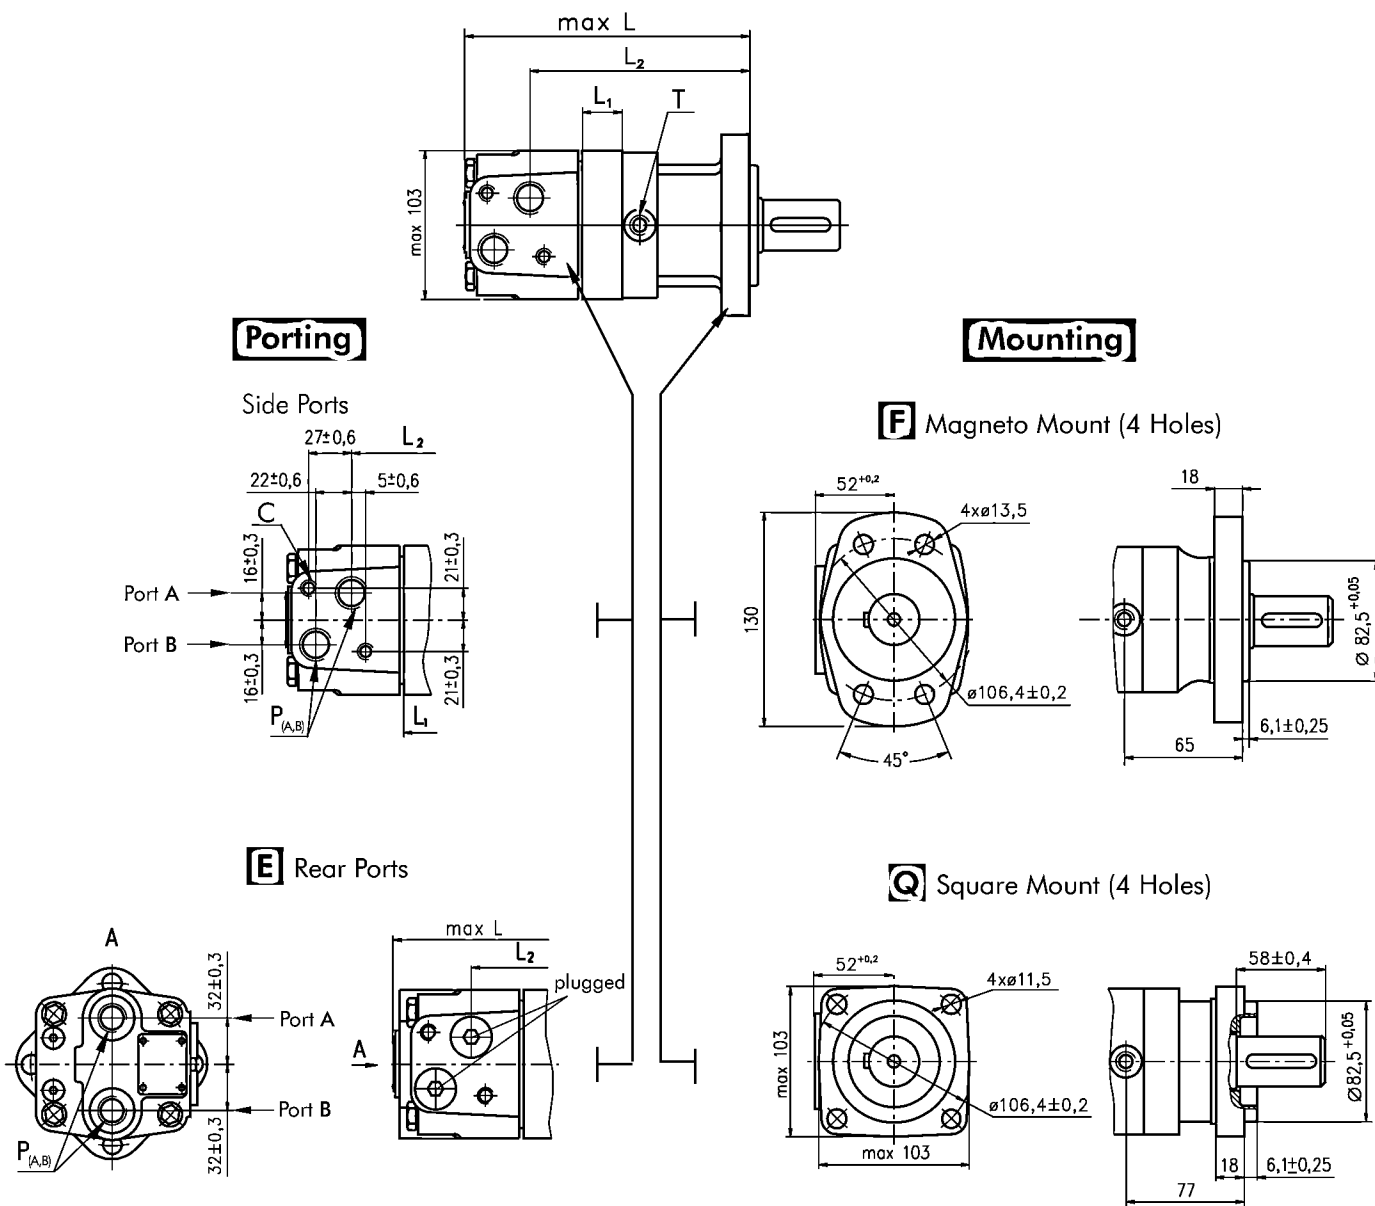

C: 2xM10-12 mm depth

P_(A,B): 2xG1/2 or 2xM22x1,5-15 mm depth

T: G ¼ or M14x1,5- 12 mm depth (plugged)

Standard Rotation

Viewed from Shaft End

Port A Pressurized - CW

Port B Pressurized - CCW

Reverse Rotation

Viewed from Shaft End

Port A Pressurized - CCW



Port B Pressurized - CW

Type	L, mm	L ₂ , mm	Type	L, mm	L ₂ , mm	Type	L, mm	Type	L, mm	*L ₁ , mm
OSF 80	166	121	OSQ 80	177	133	OSFE 80	173	OSQE 80	185	11
OSF 100	169	125	OSQ 100	181	137	OSFE 100	177	OSQE 100	189	14,4
OSF 125	174	129	OSQ 125	185	141	OSFE 125	181	OSQE 125	193	18,8
OSF 160	180	135	OSQ 160	191	147	OSFE 160	187	OSQE 160	199	24,8
OSF 200	187	142	OSQ 200	198	154	OSFE 200	194	OSQE 200	206	31,8
OSF 250	195	151	OSQ 250	207	163	OSFE 250	203	OSQE 250	215	40,5
OSF 315	207	162	OSQ 315	218	174	OSFE 315	214	OSQE 315	226	51,8
OSF 400	221	176	OSQ 400	233	189	OSFE 400	228	OSQE 400	241	66,4
OSF 475	235	190	OSQ 475	245	202	OSFE 475	242	OSQE 475	254	79,6
OSF 565	250	206	OSQ 565	261	217	OSFE 565	257	OSQE 565	269	95,3
OSF 715	276	231	OSQ 715	287	243	OSFE 715	283	OSQE 715	295	121,2



* The width of the gerolor is 3 mm greater than L₁.

DIMENSIONS AND MOUNTING DATA - OSW

[W] Wheel Mount

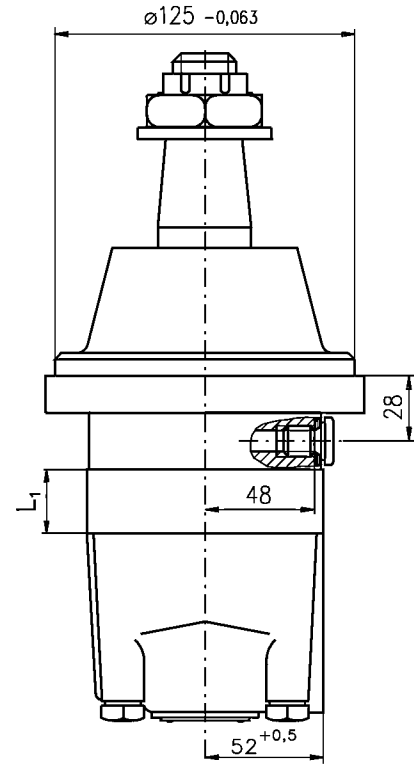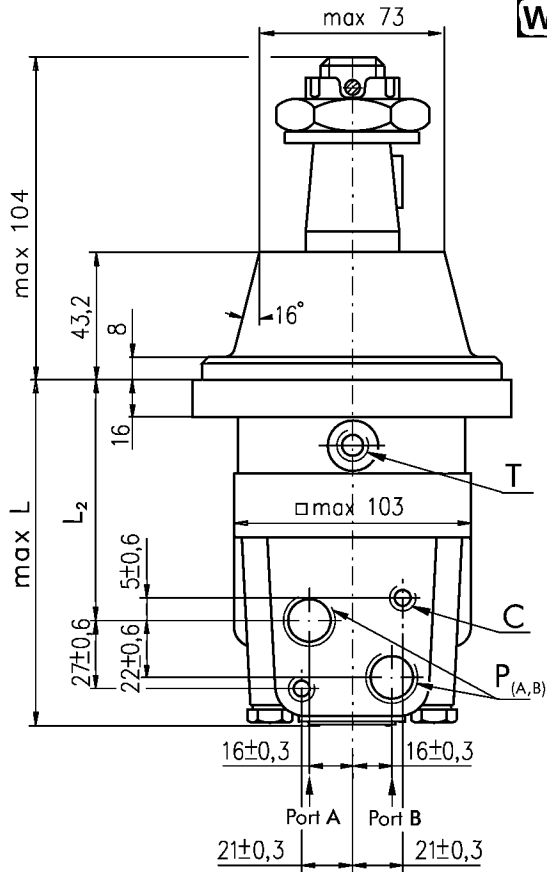

[E] Rear Port

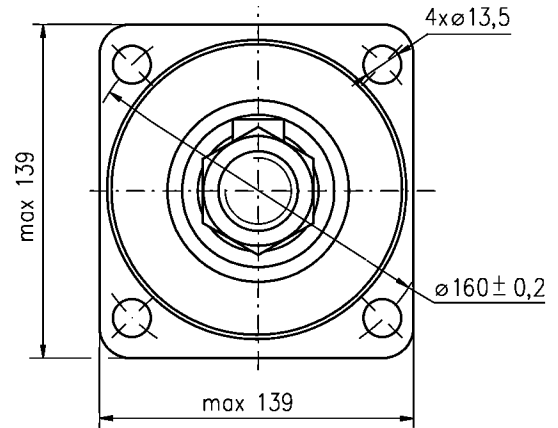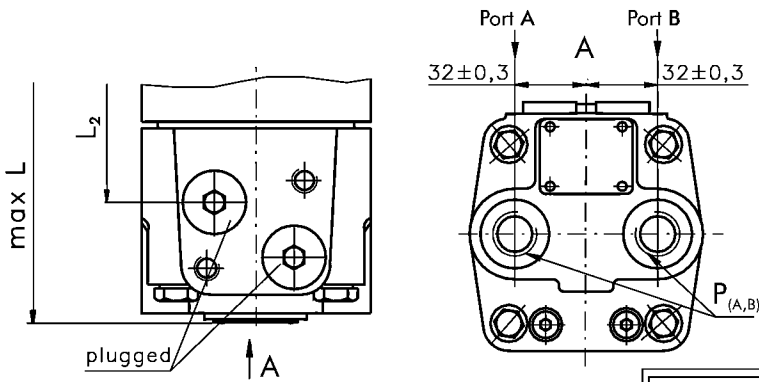

C: 2xM10-12 mm depth
P_(A,B): 2xG1/2 or 2xM22x1,5-15 mm depth
T: G ¼ or M14x1,5 - 12 mm depth(plugged)

Standard Rotation
 Viewed from Shaft End
 Port A Pressurized - CW
 Port B Pressurized - CCW


Reverse Rotation
 Viewed from Shaft End
 Port A Pressurized - CCW
 Port B Pressurized - CW

Type	L, mm	*L ₁ , mm	L ₂ , mm	Type	L, mm
OSW 80	127	11,0	84	OSWE 80	138
OSW 100	131	14,4	88	OSWE 100	142
OSW 125	135	18,8	92	OSWE 125	146
OSW 160	141	24,8	98	OSWE 160	152
OSW 200	148	31,8	105	OSWE 200	159
OSW 250	157	40,5	114	OSWE 250	168
OSW 315	168	51,8	125	OSWE 315	179
OSW 400	182	66,4	140	OSWE 400	194
OSW 475	196	79,6	153	OSWE 475	207
OSW 565	211	95,3	168	OSWE 565	222
OSW 715	237	121,2	194	OSWE 715	248

* The width of the gerolor is 3 mm greater than L₁.




DIMENSIONS AND MOUNTING DATA - OSB

[B] Motor with Brum Brake



Actuating the brake level, the brake shaft is turned. The rectangular shape of the inner part of this shaft forces the brake pads to be pressed against the brake drum. This brakes the wheel or the winch drum.


Releasing the level, the springs pull it and the brake pads back to the initial position. The motor output shaft is released. Minimum angle adjustment is 10°. It can be adjusted by dismounting the level. Depending on the application You can choose the actuating direction of the brake level. The rod connection actuating the brake should be capable of moving at last 25 mm from neutral to extreme position.

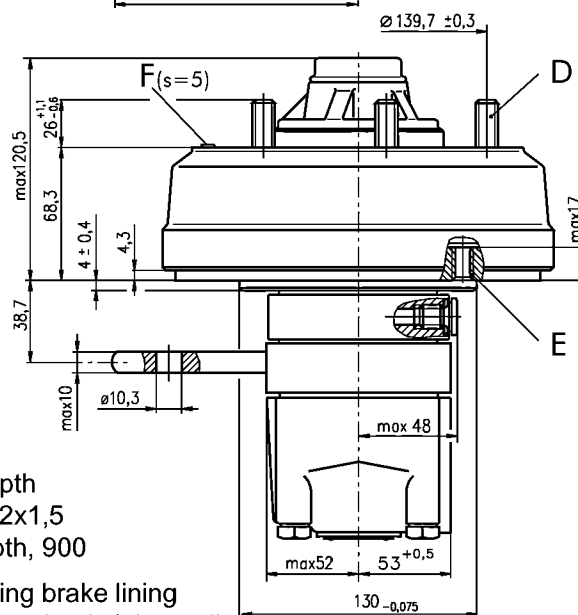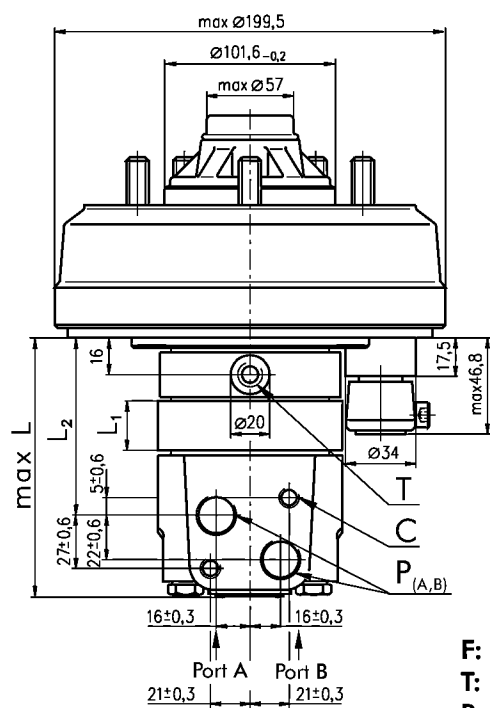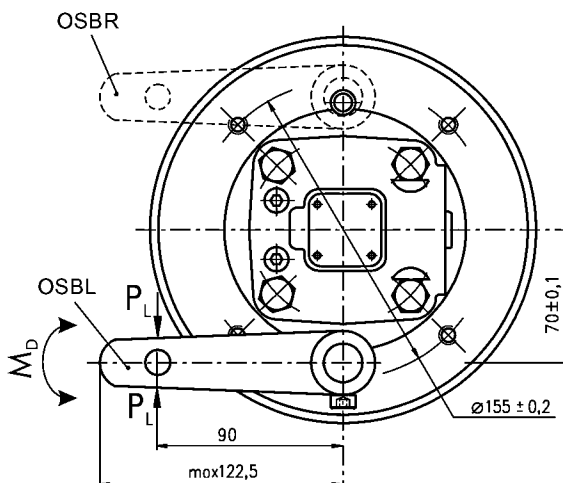

- C:** 2xM10-12 mm depth
- D:** Wheel bolts 5xM12x1,5
- E:** 4xM12; 17mm depth, 900

- F:** Inspection hole for checking brake lining
- T:** G 1/4 or M14x1,5 - 12 mm depth (plugged)
- P_(A,B):** 2xG1/2 or 2xM22x1,5-15 mm depth

[E] Rear Port

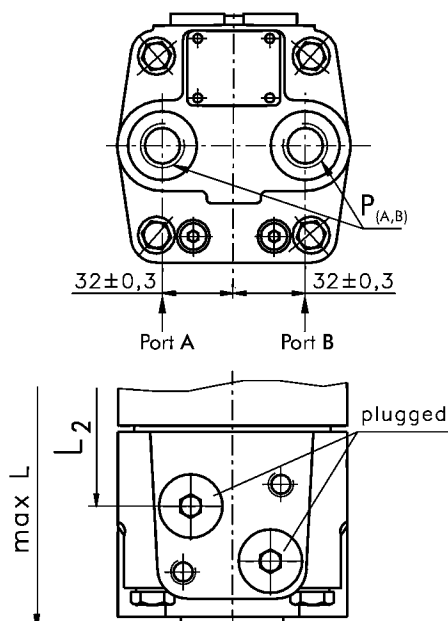

Type	L, mm	*L ₁ , mm	L ₂ , mm	Type	L, mm
OSB 80	117	11,0	71	OSBE 80	127
OSB 100	120	14,4	74	OSBE 100	130
OSB 125	124	18,8	79	OSBE 125	134
OSB 160	130	24,8	85	OSBE 160	140
OSB 200	137	31,8	92	OSBE 200	147
OSB 250	146	40,5	107	OSBE 250	156
OSB 315	157	51,8	112	OSBE 315	167
OSB 400	172	66,4	127	OSBE 400	182
OSB 475	186	79,6	140	OSBE 475	196
OSB 565	201	95,3	155	OSBE 565	211
OSB 715	227	121,2	181	OSBE 715	237


* The width of gerolor is 3 mm greater than L₁.

Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW


Reverse Rotation
Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW

SHAFT EXTENSIONS


C - $\varnothing 32$ straight, Parallel key A10x8x45 DIN 6885
Max. Torque 77 daNm

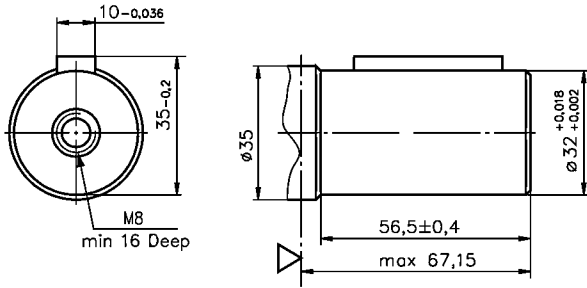


K - tapered 1:10, Parallel key B6x6x20 DIN 6885
Max. Torque 95 daNm

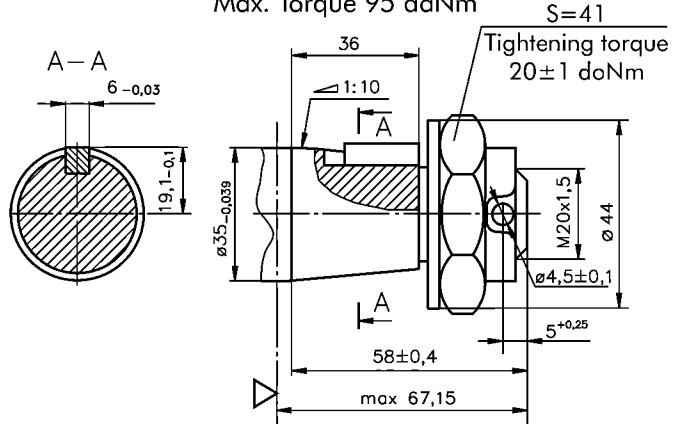


CO - $\varnothing 1\frac{1}{4}$ " straight, Parallel key $\frac{5}{16}$ "x $\frac{5}{16}$ "x $1\frac{1}{4}$ " BS46
Max. Torque 77 daNm

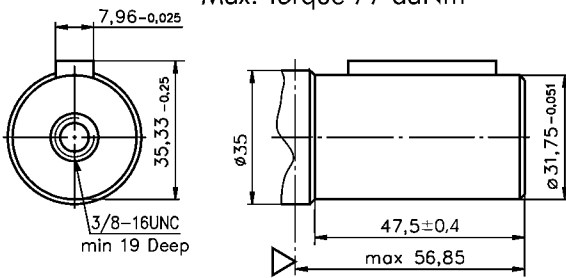


SH - $\varnothing 1\frac{1}{4}$ " splined 14T, DP12/24 ANSI B92.1-1976
Max. Torque 95 daNm

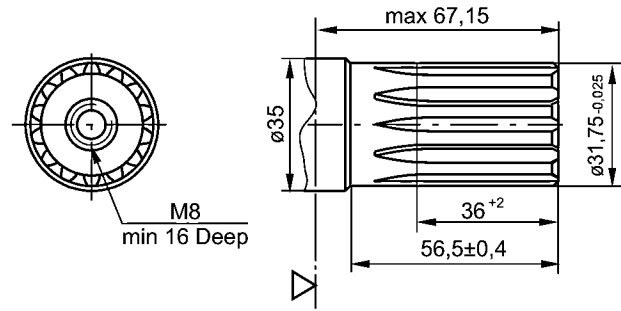

SL - $\varnothing 34,85$ p.t.o. DIN 9611 Form 1
Max. Torque 77 daNm

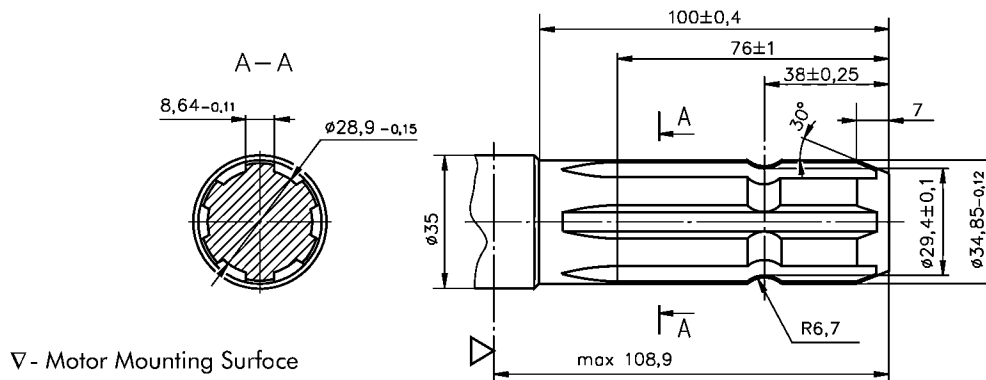





MOTORS WITH TACHO CONNECTION - Option "T"

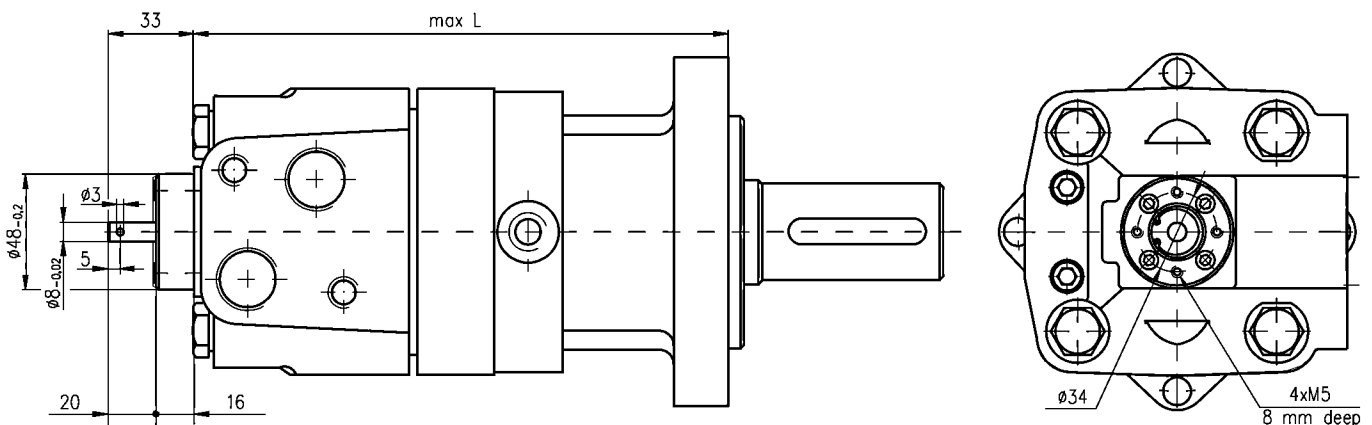


PERMISSIBLE SHAFT LOADS

The output shaft runs in tapered bearings that permit high axial and radial forces.


Curve "1" shows max. radial shaft load. Any shaft load exceeding the values quoted in the curve will seriously reduce motor life. The two other curves apply to a B10 bearing life of 3000 hours at 200 RPM.

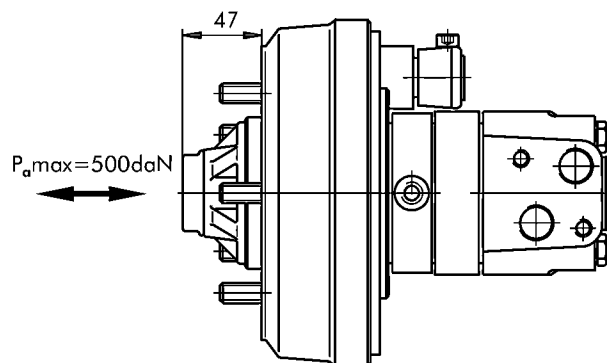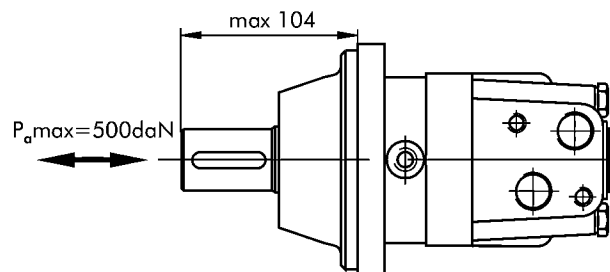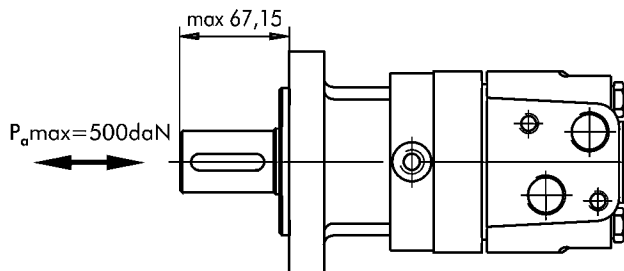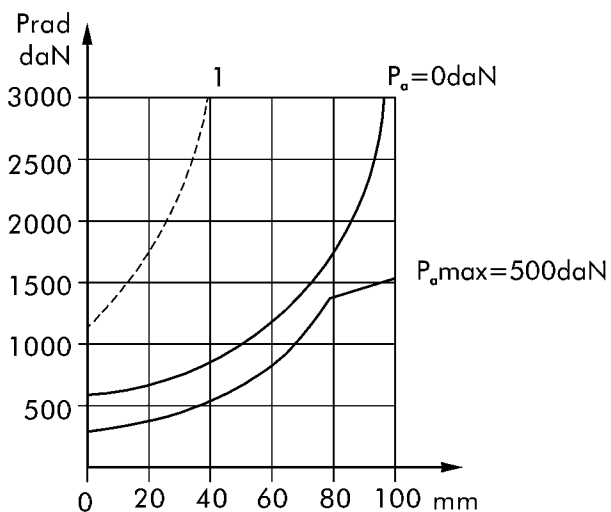

FUNCTION DIAGRAM OSB

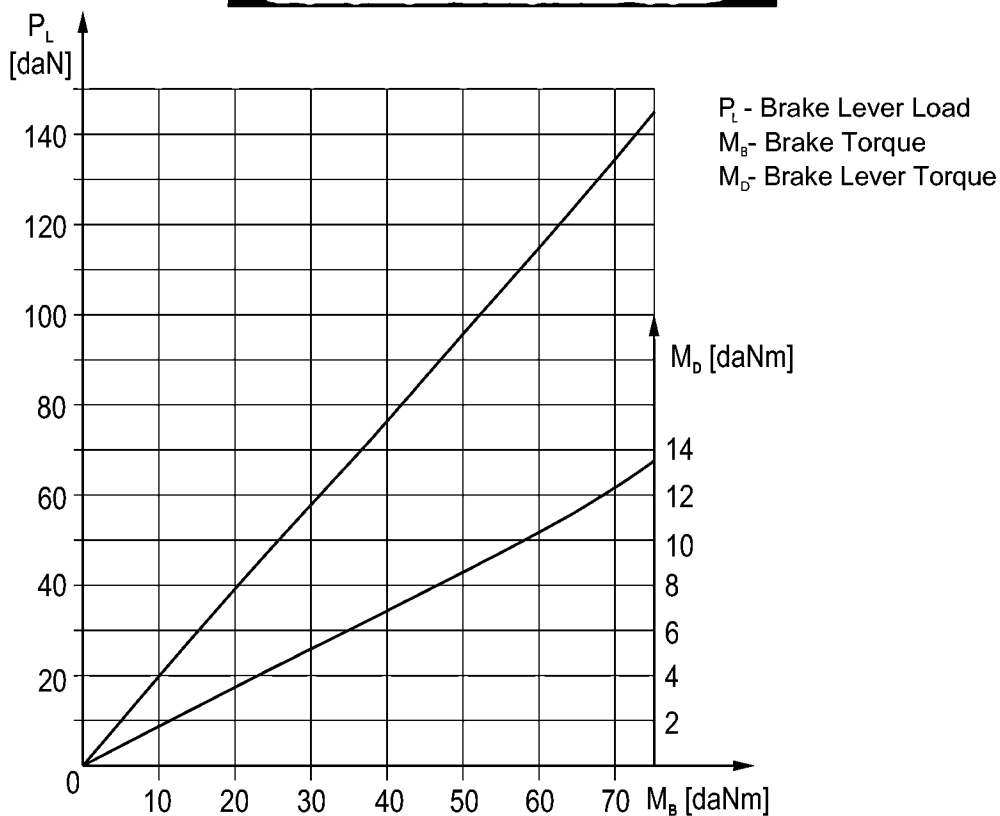

DIMENSIONS AND MOUNTING DATA - OSS, OSV and OSZ

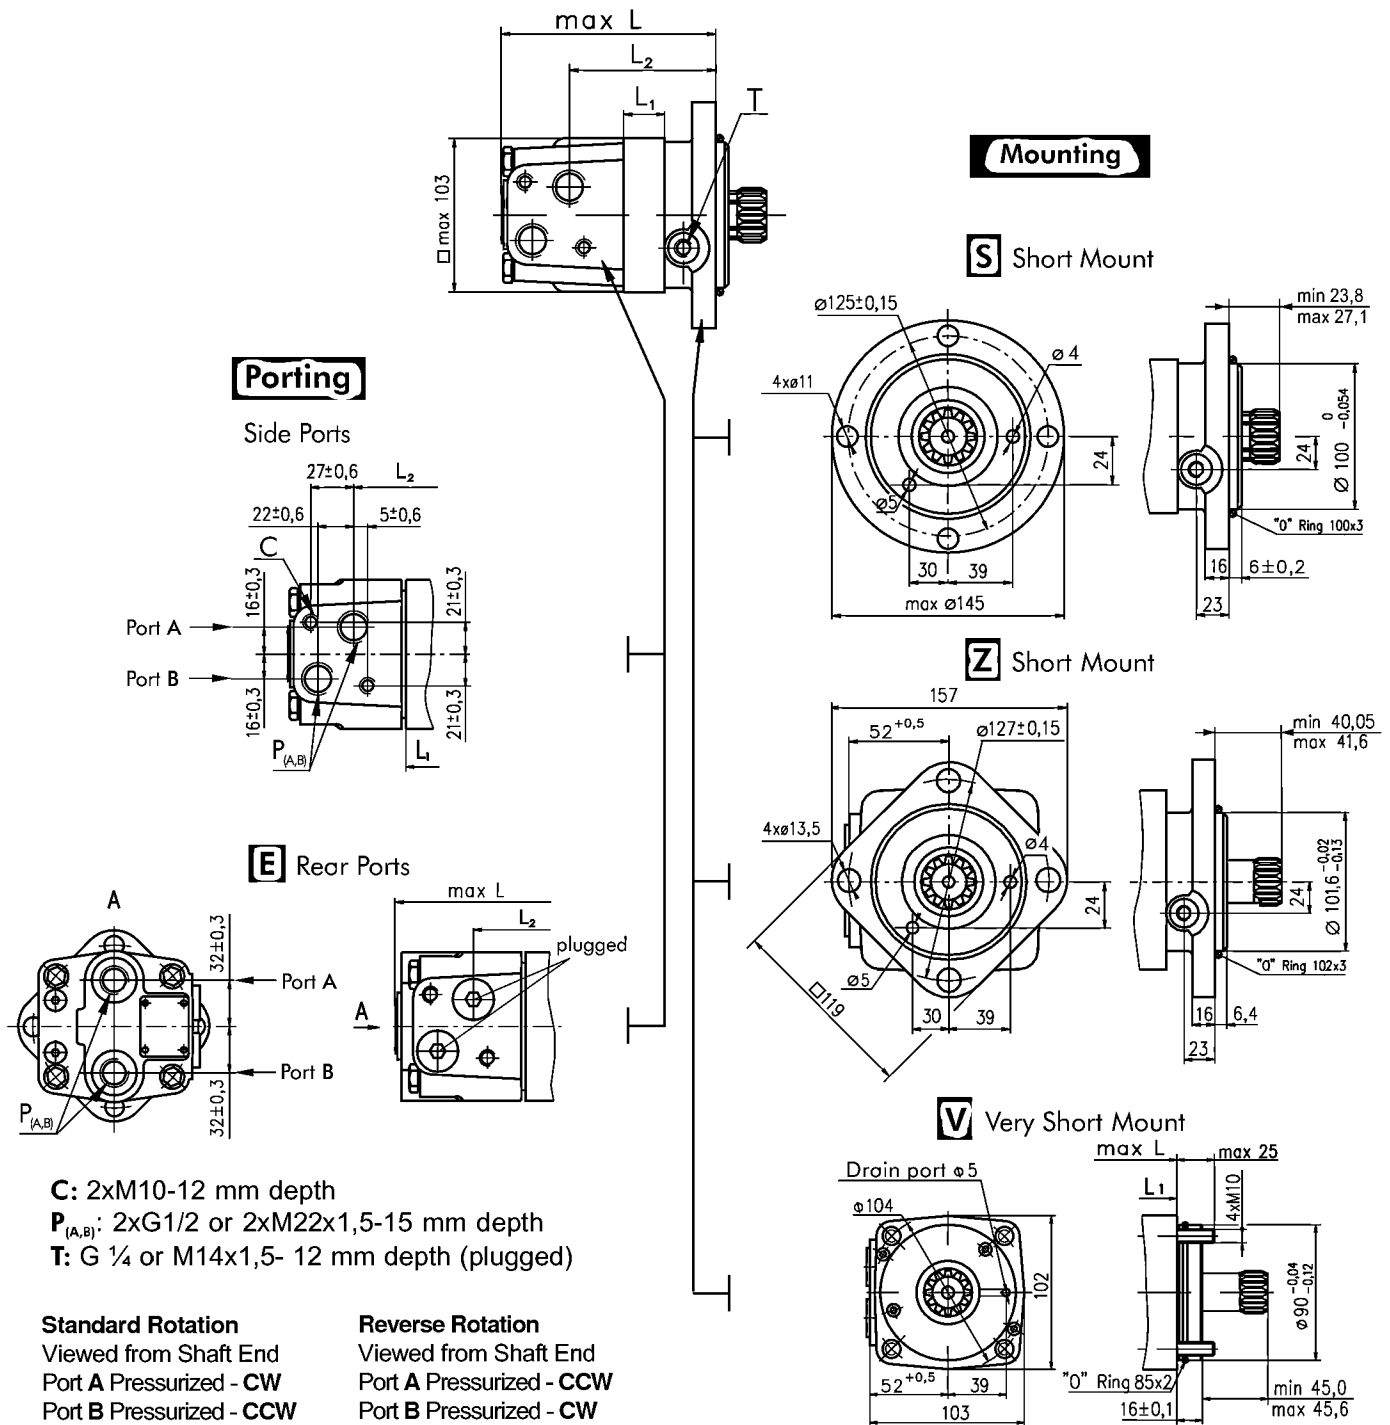


Type**	L, mm	L ₂ , mm	Type	L, mm	L ₂ , mm	Type	L, mm	Type	L, mm	*L ₁ , mm
OSS 80	123	80	OSV 80	89	49	OSSE 80	134	OSVE 80	97	11
OSS 100	127	84	OSV 100	92	52,5	OSSE 100	138	OSVE 100	100	14,4
OSS 125	131	87	OSV 125	97	57	OSSE 125	141	OSVE 125	105	18,8
OSS 160	137	93	OSV 160	103	63	OSSE 160	147	OSVE 160	111	24,8
OSS 200	144	100	OSV 200	110	70	OSSE 200	154	OSVE 200	118	31,8
OSS 250	153	109	OSV 250	118	78,5	OSSE 250	163	OSVE 250	126	40,5
OSS 315	164	120	OSV 315	130	90	OSSE 315	174	OSVE 315	138	51,8
OSS 400	179	135	OSV 400	144	105	OSSE 400	189	OSVE 400	153	66,4
OSS 475	192	149	OSV 475	158	118	OSSE 475	203	OSVE 475	166	79,6
OSS 565	207	164	OSV 565	173	133	OSSE 565	218	OSVE 565	181	95,3
OSS 715	233	190	OSV 715	199	159	OSSE 715	244	OSVE 715	207	121,2

* The width of the gerolor is 3 mm greater than L₁.


** OSZ(E) have the same dimension as type OSS(E)

DIMENSIONS OF THE ATTACHED COMPONENT

For OSS

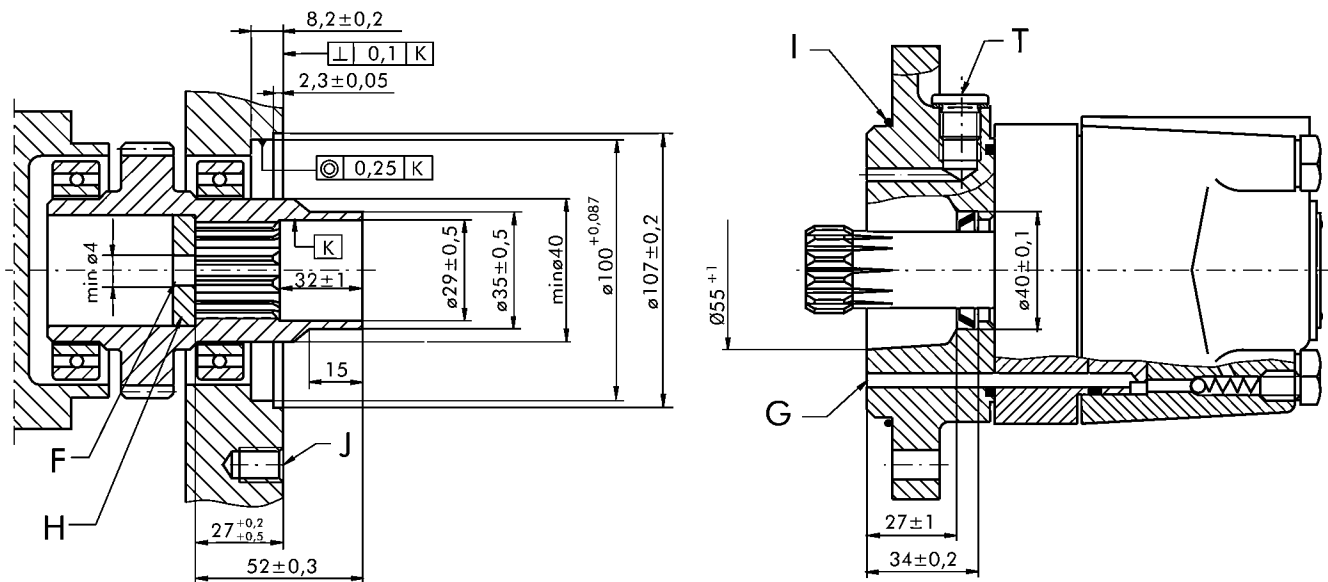

For OSZ


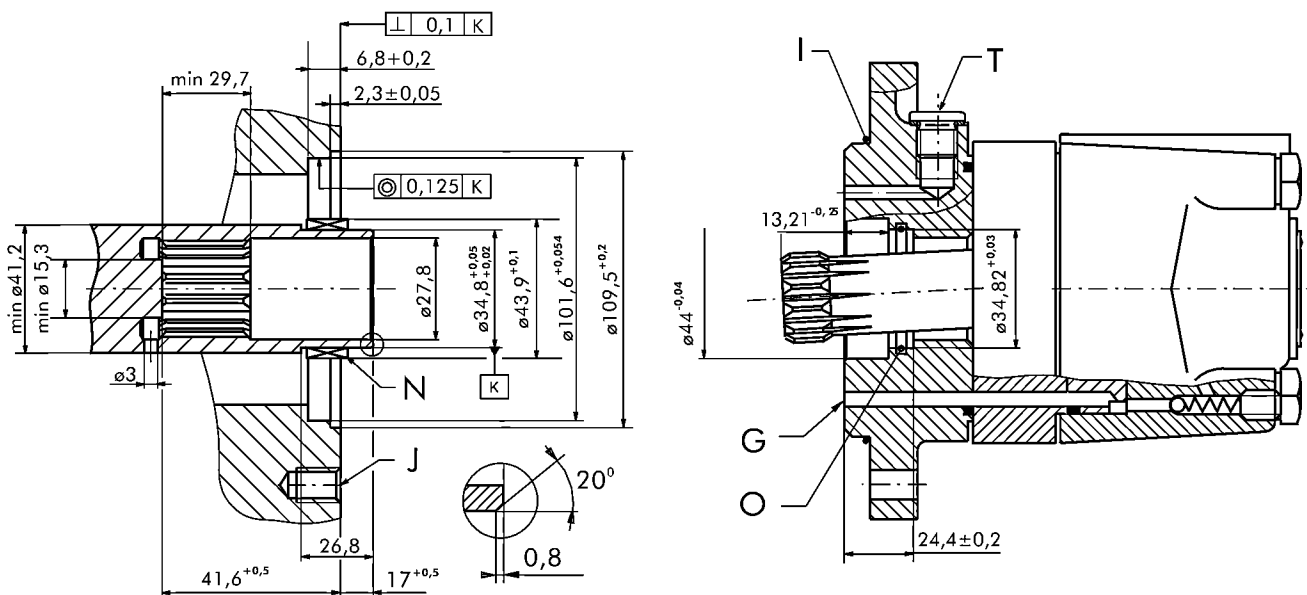


- F:** Oil circulation hole
- G:** Internal drain channel
- H:** Hardened stop plate
- I:** O- Ring 100x3mm (for OSS) or 102x3mm (for OSZ)

- J:** 4xM10-16 mm depth (for OSS) or 4xM12-20 mm depth (for OSZ), 90°
- N:** Needle bearing $1\frac{3}{8} \times 1\frac{3}{4}$ "
- O:** O- Ring 34,5x3mm
- T:** Drain connection G1/4 or M14x1,5

DIMENSIONS OF THE ATTACHED COMPONENT (continued)

For OSV

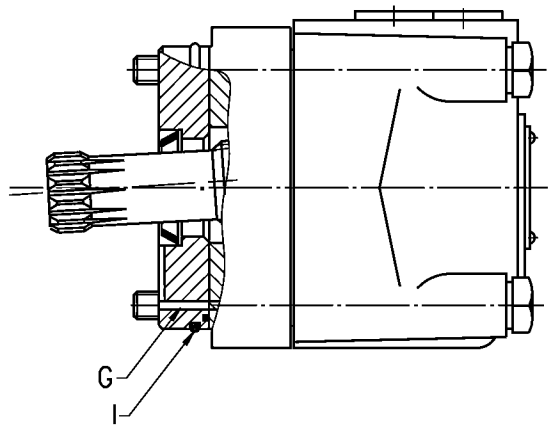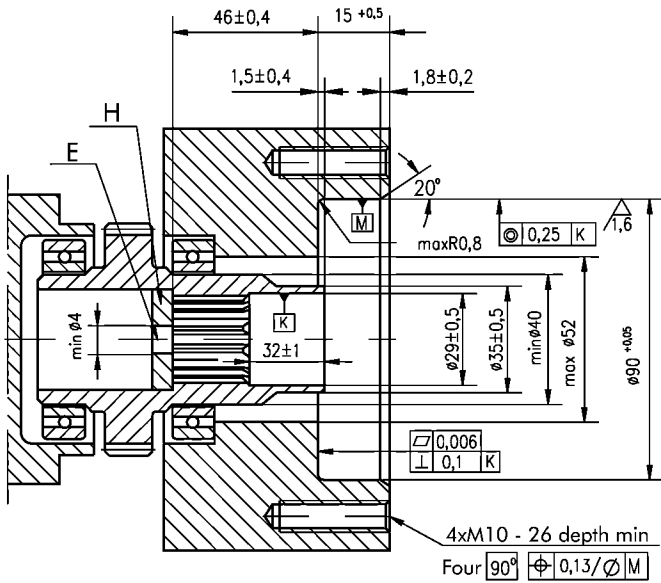

E: External drain channel
G: Internal drain channel

H: Hardened stop plate
I: O- Ring 85x2mm

DRAIN CONNECTION

A drain line ought to be used when pressure in the return line can exceed the permissible pressure. It can be connected:

- For OSZ at the drain port of the motor;
- For OSV at the drain connection of the attached component. The maximum pressure in the drain line is limited by the attached component and its shaft seal.


The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT

Standard ANSI B92.1-1976, class 5
[$m=2.1166$; corrected $x.m=+0,8$]


Fillet Root Side Fit		mm
Number of Teeth	z	12
Diametral Pitch	DP	12/24
Pressure Angle		30°
Pitch Dia.	D	25,4
Major Dia.	D _{ri}	28,0 _{-0,1}
Minor Dia.	D _i	23,0 ^{+0,033}
Space Width [Circular]	L _o	4,308±0,020
Fillet Radius	R _{min}	0,2
Max. Measurement between Pin	L	17,62 ^{+0,15}
Pin Dia.	d	4,835±0,001

Above are when hardened

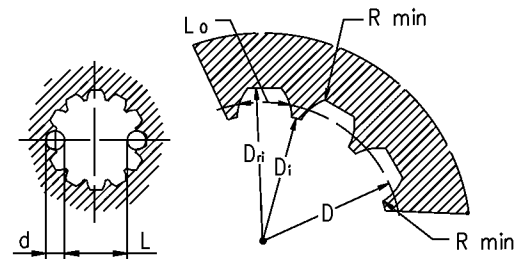



Hardening Specification:
HRC 60±2
Effective case depth (HRC 52) 0,7±0,2 mm
Materiall 20 MoCr4 DIN 17210 or better

OUTLINE DIMENSIONS REFERENCE for OSU

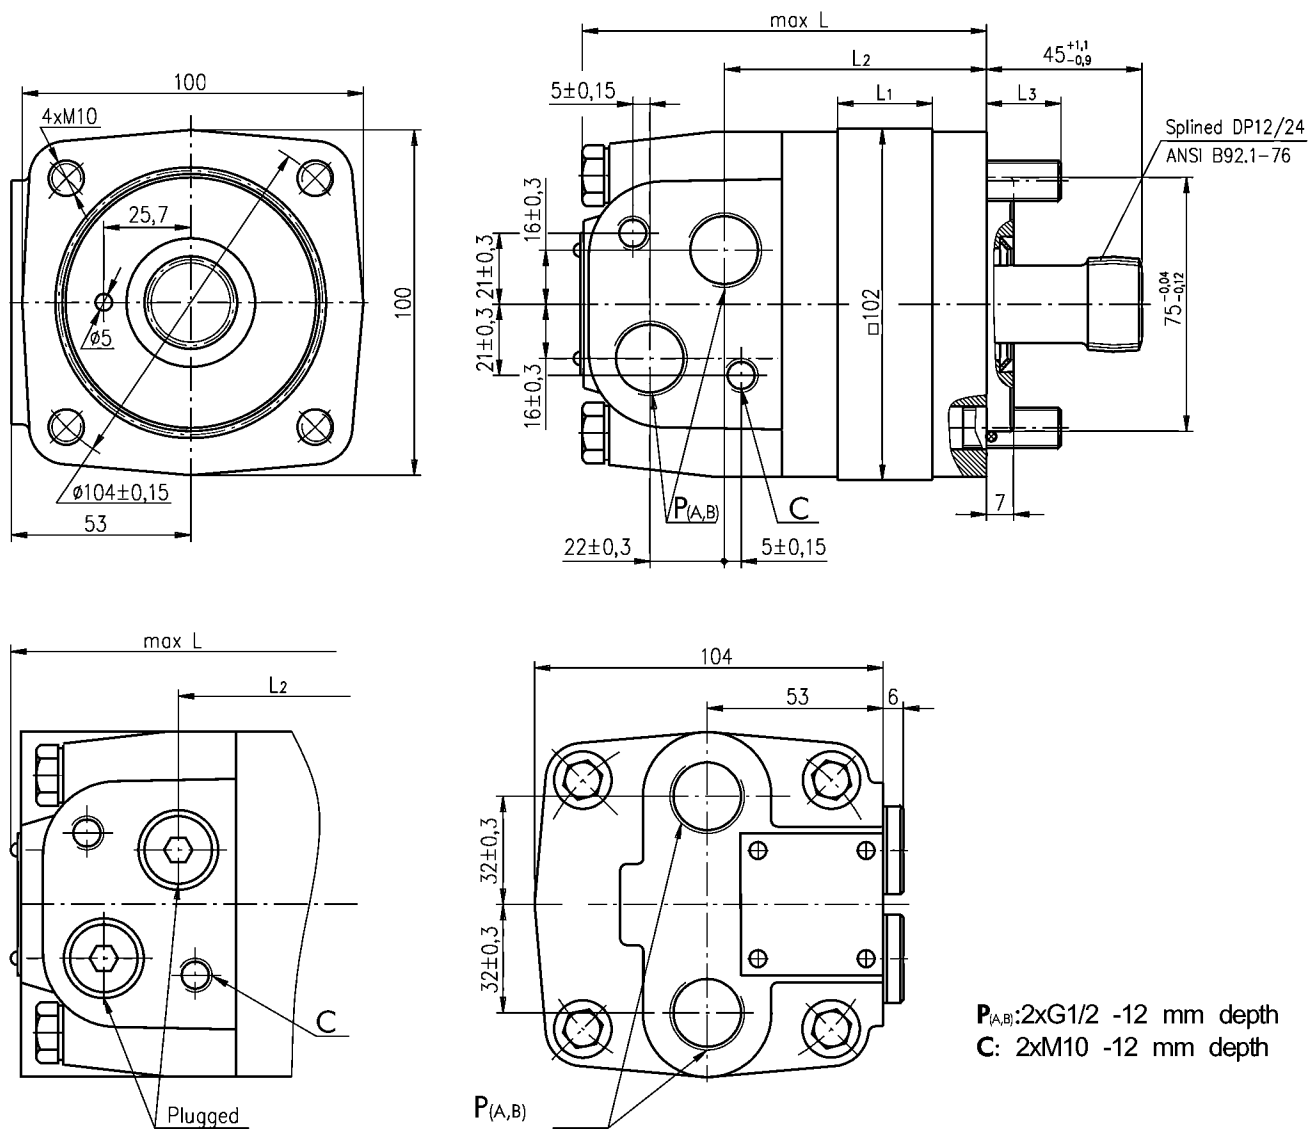

Type	L, mm	Type	L, mm	L ₁ , mm	L ₂ , mm	L ₃ , mm
OSU 80	98,5	OSUE 80	103,5	14,0	63,0	22,0
OSU 100	102,0	OSUE 100	107,0	17,4	66,4	18,5
OSU 125	106,0	OSUE 125	113,0	21,8	70,8	19,0
OSU 160	112,0	OSUE 160	117,0	27,8	76,8	23,0
OSU 200	119,0	OSUE 200	124,0	34,8	83,8	21,0
OSU 250	128,0	OSUE 250	133,0	43,5	92,5	22,5
OSU 315	139,0	OSUE 315	144,0	54,8	103,8	21,0
OSU 400	154,0	OSUE 400	159,0	69,4	118,4	21,5

DIMENSIONS OF THE ATTACHED COMPONENT for OSU

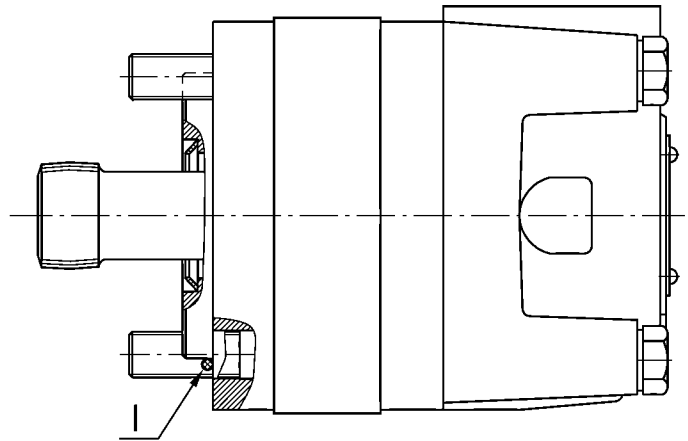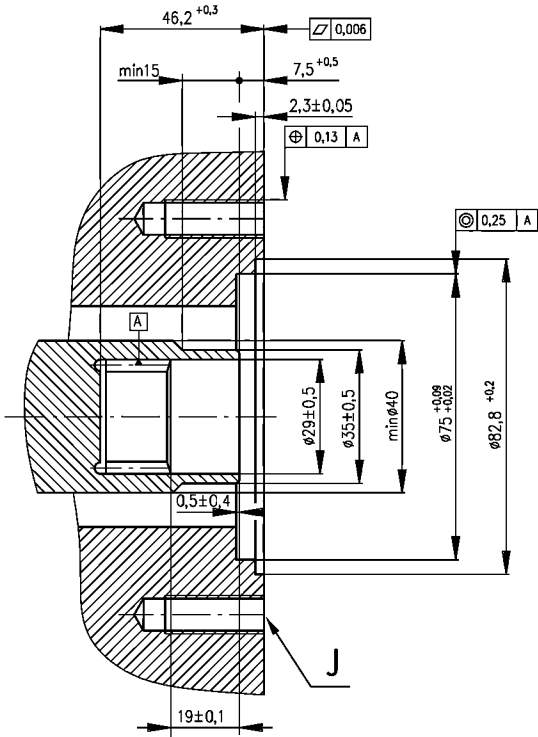


J: 4xM10-26 mm depth, 90°, ø104
 I: O- Ring 75x3 mm

INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT

Standard ANSI B92.1-1976, class 5
 [m=2.1166; corrected x.m=+0,8]

Fillet Root Side Fit	mm
Number of Teeth	z 12
Diametral Pitch	DP 12/24
Pressure Angle	30°
Pitch Dia.	D 25,4
Major Dia.	D _{ri} 28,0 _{-0,1}
Minor Dia.	D _i 23,0 ^{+0,033}
Space Width [Circular]	L _a 4,308 ± 0,020
Fillet Radius	R _{min} 0,2
Max. Measurement between Pin	L 17,62 ^{+0,15}
Pin Dia.	d 4,835 ± 0,001

Above are when hardened

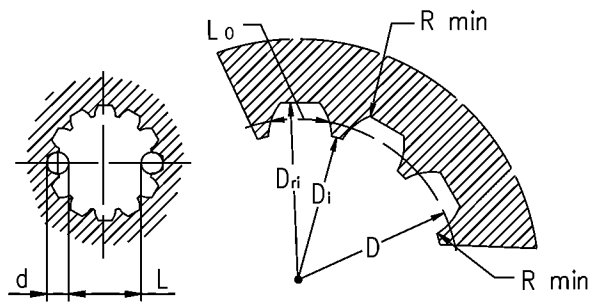


Hardening Specification:
 HRC 60±2
 Effective case depth (HRC 52) 0,7±0,2 mm
 Material 20 MoCr4 DIN 17210 or better

Hydraulic motors with speed sensor type OS...RS

MetaHydraulic is introducing hydraulic motor with a new generation of speed sensor. The electric output signal is a standard voltage signal that can be used for regulating the speed of a motor.

The speed is measured by a sensor in accordance with the Hall principle. Signal processing and amplification are performed in the sensor housing. A connection is provided in the housing by a Plug connector M12 Series.

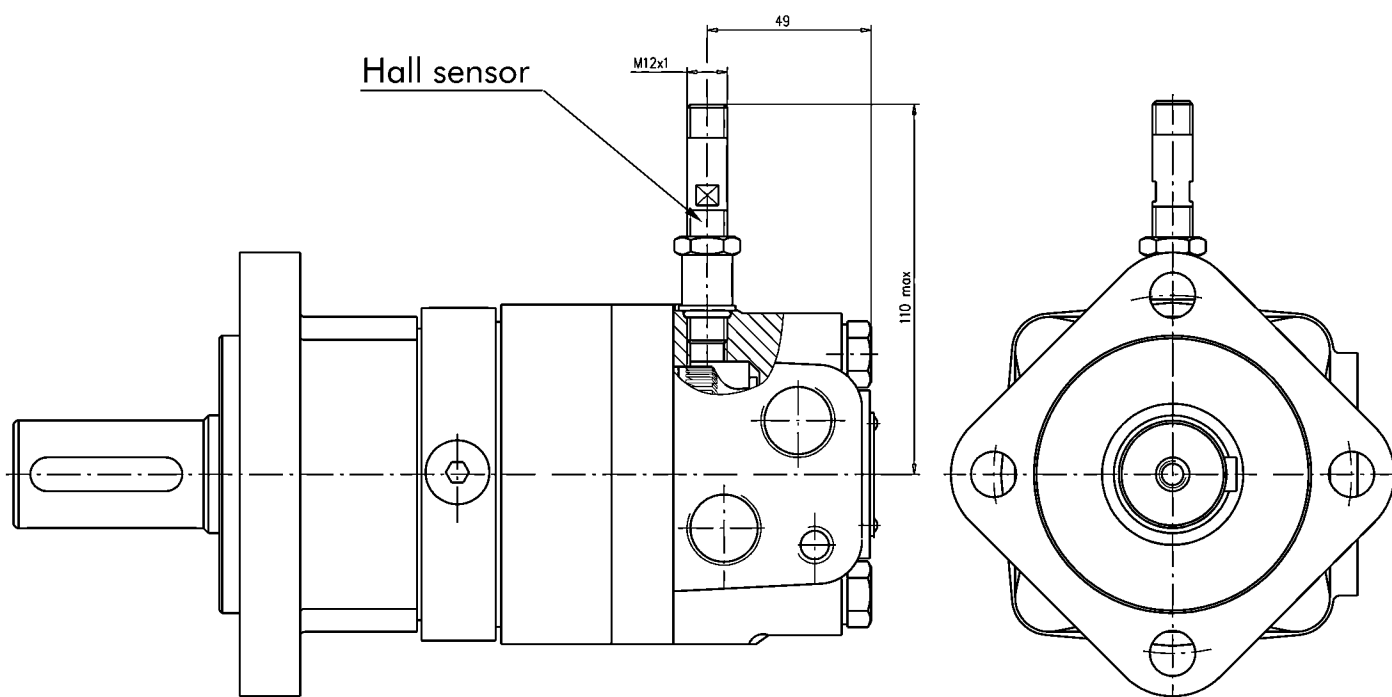


This performance is applicable for all motors of OS series. The main technical features correspond to the standard motors series OS.

DIFFERENTIAL HALL SENSOR

Technical data

Frequency range	3...20 000 Hz
Output	PNP
Power supply	10...36 VDC
Current input	20 mA (@24 VDC)
Current load	500 mA (@24 VDC; 24°C)
Ambient Temperature	minus 40... plus 125°C
Protection	IP 67
Plug connector	M12-Series
Mounting principle	ISO 6149
Pulses per revolution	54


Output signal

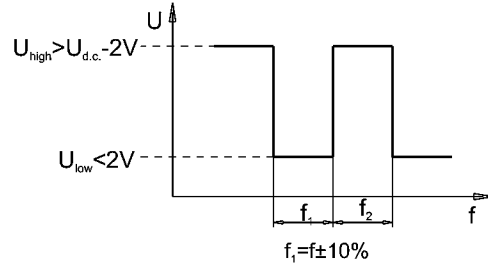


Load max.: $I_{high} = I_{low} < 50\text{mA}$
 No load current, max: 20 mA

Wiring diagram


PNP

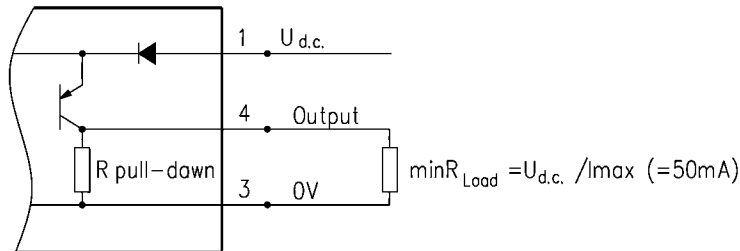

NPN

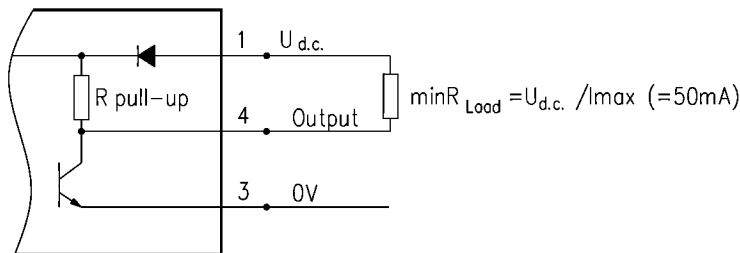

Stik type



Terminal No.	Connection
1	$U_{d.c.}$
2	No connection
3	0V
4	Output signal

ORDER CODE

	1	2	3	4	5	6	7	8	9	10	11
OS											

Pos.1- **Mounting Flange**

- omit - SAE A mount, four holes
- A** - SAE A mount, two holes
- F** - Magneto mount, four holes
- Q** - Square mount, four holes
- B** - Motor with drum brake
- S** - Short mount
- V** - Very short mount
- W** - Wheel mount
- Z** - Short mount, with place for needle bearing

Pos.2- **Port type**

- omit - Side ports
- E** - Rear ports

Pos.3- **Displacement code**

- 80** - 80,5 [cm³/rev]
- 100** - 100,0 [cm³/rev]
- 125** - 125,7 [cm³/rev]
- 160** - 159,7 [cm³/rev]
- 200** - 200,0 [cm³/rev]
- 250** - 250,0 [cm³/rev]
- 315** - 314,9 [cm³/rev]
- 400** - 397,0 [cm³/rev]
- 475** - 474,6 [cm³/rev] (w/o Function diagram)
- 525** - 522,7 [cm³/rev] (w/o Function diagram)
- 565** - 564,9 [cm³/rev] (w/o Function diagram)
- 715** - 715,0 [cm³/rev] (w/o Function diagram)

Pos.4- **Shaft Extensions***

- C** - ø32 straight, Parallel key A10x8x45 DIN6885
- CO** - ø1¼" straight, Parallel key $\frac{5}{16}$ "x $\frac{5}{16}$ "x1¼" BS46
- K** - ø35 tapered 1:10, Parallel key B6x6x20 DIN6885
- SL** - ø34,85 p.t.o. DIN 9611 Form 1
- SH** - ø1¼" splined 14T ANSI B92.1-1976

Pos. 5- **Ports**

- omit - BSPP (ISO 228)
- M** - Metric (ISO 262)

Pos.6- **Actuating Direction****

- R** - Right
- L** - Left

Pos. 7- **Speed Monitoring**

- omit - none
- T** - with tocho connection (only for side ports)
- RS-P** - with speed sensor (PNP pull-down resistor)
- RS-N** - with speed sensor (NPN pull-up resistor)

Pos.8- **Special Features** (see Specification data-page OS - 04)

- omit - none
- LL** - Low Leakage
- LSV** - Low Speed Valve

Pos.9- **Rotation**

- omit - Standard Rotation
- R** - Reverse Rotation

Pos.10- **Option (Paint)*****

- omit - no Paint
- P** - Painted
- PC** - Corrosion Protected Paint

Pos.11- **Design Series**

- omit - Factory specified

NOTES:

* The permissible output torque for shafts must be not exceeded!

** Only for OSB

*** Color at customer's request.


The hydraulic motors are mangano-phosphatized as standard.



HYDRAULIC MOTORS OSY



OSY is the new hydraulic motor in a family of "disc valve" series which has dimensions and mounting data the same as at hydraulic motors type OS.



This motor is described with 15÷20% higher technical data-max. Torque and max. Pressure drop, thereby higher power. This makes it suitable for vehicles with greater loads and speed drop.

CONTENTS

Specification data	OSY-02+03
Function diagrams	OSY-04+06
Dimensions and mounting	OS-10+11
Wheel motor	OS-12
Shaft extensions	OS-13
Permissible shaft loads	OS-14
Dimensions and mounting - OSYS, V	OSY-07
Internal Spline data	OSY-08
Order code	OSY-08

OPTIONS

- » Model- Disc valve, roll-gerotor
- » Flange and wheel mount;
- » Short motor;
- » Side and rear ports
- » Shafts- straight, splined and tapered;
- » Other special features.


GENERAL

Displacement, [cm ³ /rev.]	159,7 ÷ 397
Max. Speed, [RPM]	470 ÷ 185
Max. Torque, [daNm]	46,1 ÷ 90
Max. Output, [kW]	11 ÷ 19,5
Max. Pressure Drop, [bar]	205 ÷ 160
Max. Oil Flow, [l/min]	75
Min. Speed, [RPM]	8 ÷ 5
Permissible Shaft Loads, [daN]	P _{rad} =1500; P _α =500
Pressure fluid	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range, [°C]	-30 ÷ 90
Optimal Viscosity range, [mm ² /s]	20 ÷ 75
Filtration	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

Oil flow in drain line

Pressure drop (bar)	Viscosity (mm ² /s)	Oil flow in drain line (l/min)
140	20	1,5
	35	1
210	20	3
	35	2

Pressure Losses

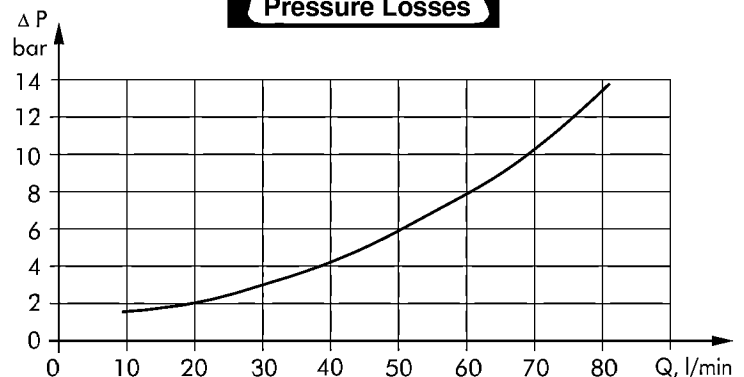

SPECIFICATION DATA FOR OSY

Type	OSY 160	OSY 200	OSY 250	OSY 315	OSY 400	
Displacement [cm³/rev.]	159,7	200	250	314,9	397	
Max. Speed, [RPM]	cont.	470	375	300	240	185
	Int.*	560	450	360	285	225
Max. Torque [daNm]	cont.	46,1	58,0	72,5	92,2	90,0
	Int.*	51,5	64,5	80,6	96,0	97,0
Max. Output [kW]	cont.	19,5	19,5	18,5	16	11,0
	int.*	24,0	24,0	23	17,5	12
Max. Pressure Drop [bar]	cont.	205	205	205	205	160
	Int.*	225	225	225	220	175
Max. Oil Flow [l/min]	cont.	75	75	75	75	75
	Int.*	90	90	90	90	90
Max. Inlet Pressure [bar]	cont.	225	225	225	225	225
	Int.*	250	250	250	250	250
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line, [bar]	cont. 0-100 RPM	100	100	100	100	100
	cont. 100-300 RPM	50	50	50	50	50
	cont. >300 RPM	20	20	-	-	-
Max. Return Pressure with Drain Line, [bar]	Int.* 0-max. RPM	100	100	100	100	100
	cont.	140	140	140	140	140
Max. Starting Pressure with Unloaded Shaft, [bar]	Int.*	175	175	175	175	175
	cont.	8	8	8	8	8
Min. Starting Torque [daNm]	at max. press. drop cont.	36,9	46,2	58,0	73,8	72,0
	at max. press. drop Int.*	40,5	50,7	63,6	79,2	78,7
Min. Speed**, [RPM]		8	6	6	5	5
Weight, [kg] For rear ports: +0,400 kg	OSYF	10,8	11,2	11,7	12,4	13,3
	OSYW	11,3	11,7	12,2	12,9	13,8
	OSYQ	11,2	11,6	12,1	12,8	13,7

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** For speeds of 5 RPM lower than given, consult factory or your regional manager.

- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 13mm²/s at operating temperatures.
- 5) Recommended maximum system operating temperature is 82°C.
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.



SPECIFICATION DATA for OSY...LSV

Low Speed Valve (LSV) "LSV" Series hydraulic motors have been designed to operate with normal pressure drop and to ensure smooth run at low speed (up to 200 min⁻¹), as the best security for operation is guaranteed at frequency of rotation 20 ÷ 50 min⁻¹. They have an increased starting pressure drop and are not recommended for using at pressure less than 40 bars.

Look at specification data for hydraulic motors standard version. The modification concerns only the following parameters : maximum speed , maximum output, maximum Oil flow and maximum starting pressure.

Type		OSY 160	OSY 200	OSY 250	OSY 315	OSY 400
Max. Speed, [RPM]	Cont.	200	200	200	200	185
	Int.*	250	250	250	250	225
Max. Output [kW]	Cont.	8,0	8,0	8,8	10,6	9,5
	Int.*	12,2	12,4	13,4	15,0	12,8
Max. Oil Flow [l/min]	Cont.	32	40	50	65	75
	Int.*	40	50	62,5	80	90
Max. Starting Pressure with Unloaded Shaft, [bar]		15	15	15	15	15

SPECIFICATION DATA for OSY..LL

Low Leakage (LL) "LL" Series hydraulic motors have been designed to operate at the whole standard range of working conditions (pressure drop and frequency of rotation) , but with considerable decreased volumetric losses in the drainage ports. Their main purpose is to operate as series-connected motors in hydraulic systems.


For this version is permissible decreasing of the maximal torque with up to 5% (at middle speed) and up to 10% (at high speed) in comparison to the standard versions of motors.

Look at specification data for hydraulic motors standard version. The modification concerns only the parameters: maximum torque, maximum output, minimum starting torque.


Type		OSY 160	OSY 200	OSY 250	OSY 315	OSY 400
Max. Torque [daNm]	Cont.	43,8	55,1	68,8	87,6	85,5
	Int.*	48,9	61,3	76,6	91,2	92,2
Max. Output [kW]	Cont.	17,6	17,6	16,7	14,7	10,0
	Int.*	21,8	21,8	20,7	15,8	10,9
Min. Starting Torque [daNm]	Cont.	35,9	45,1	56,4	71,8	70,2
	Int.*	39,6	49,7	62,0	73,9	74,7

FUNCTION DIAGRAMS

OSY 160

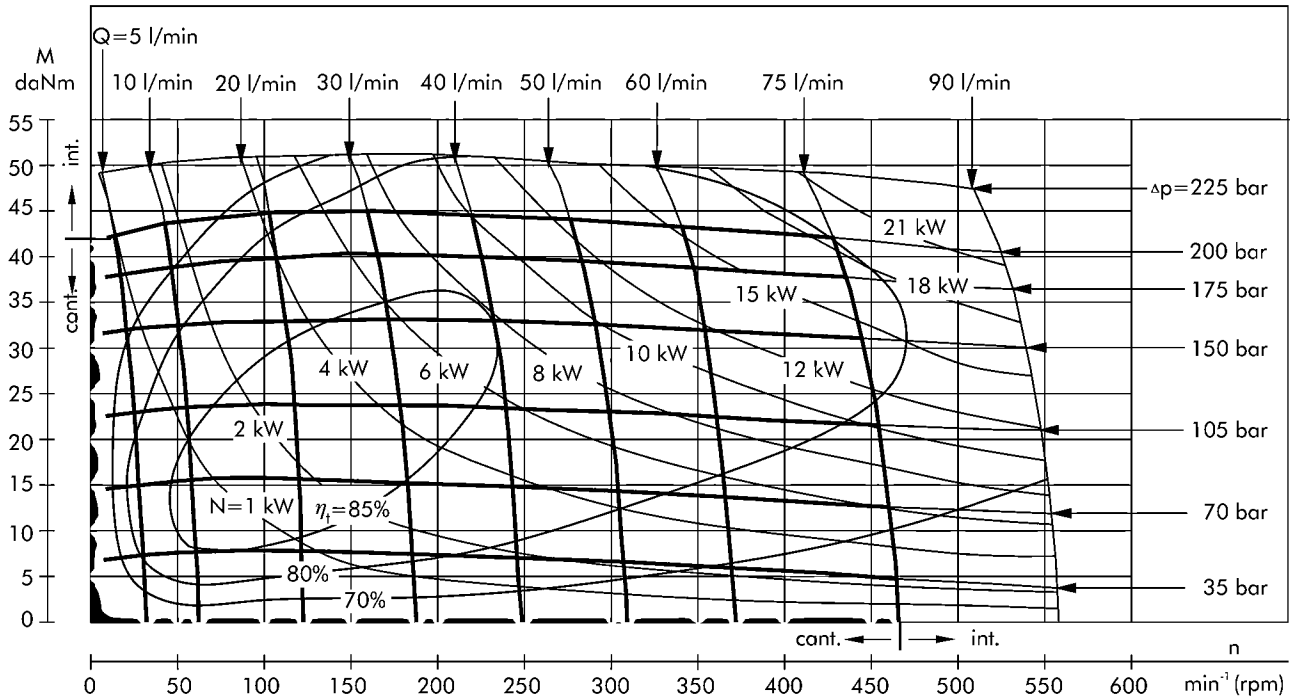


OSY 200

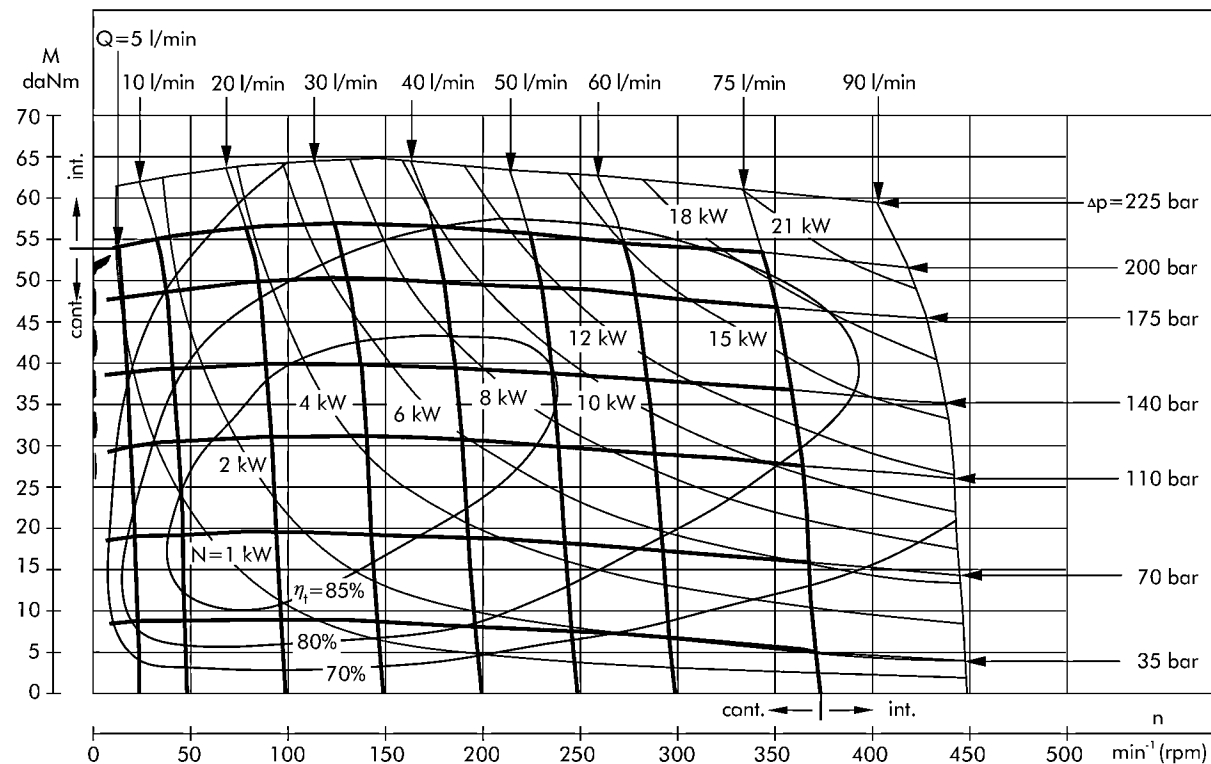


The function diagrams data was collected at back pressure 5÷10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OSY 250

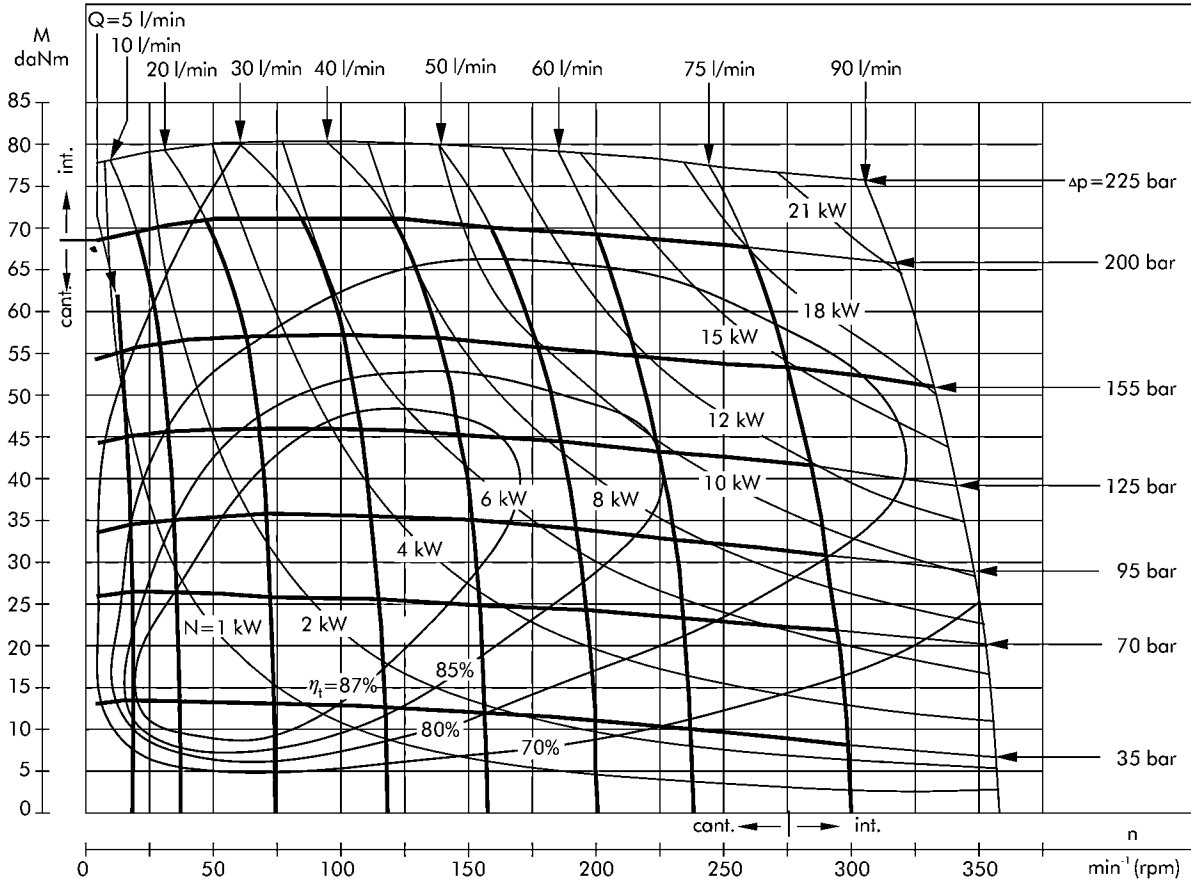


OSY 315

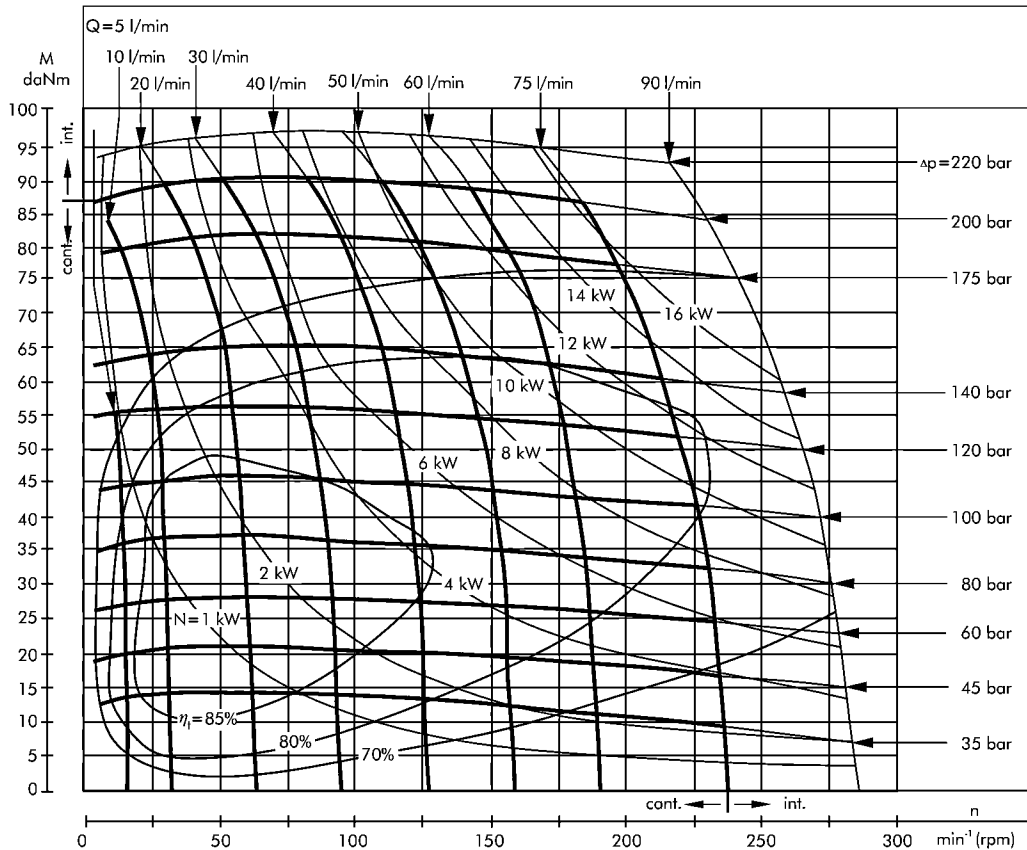

The function diagrams data was collected at back pressure 5±10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OSY 400

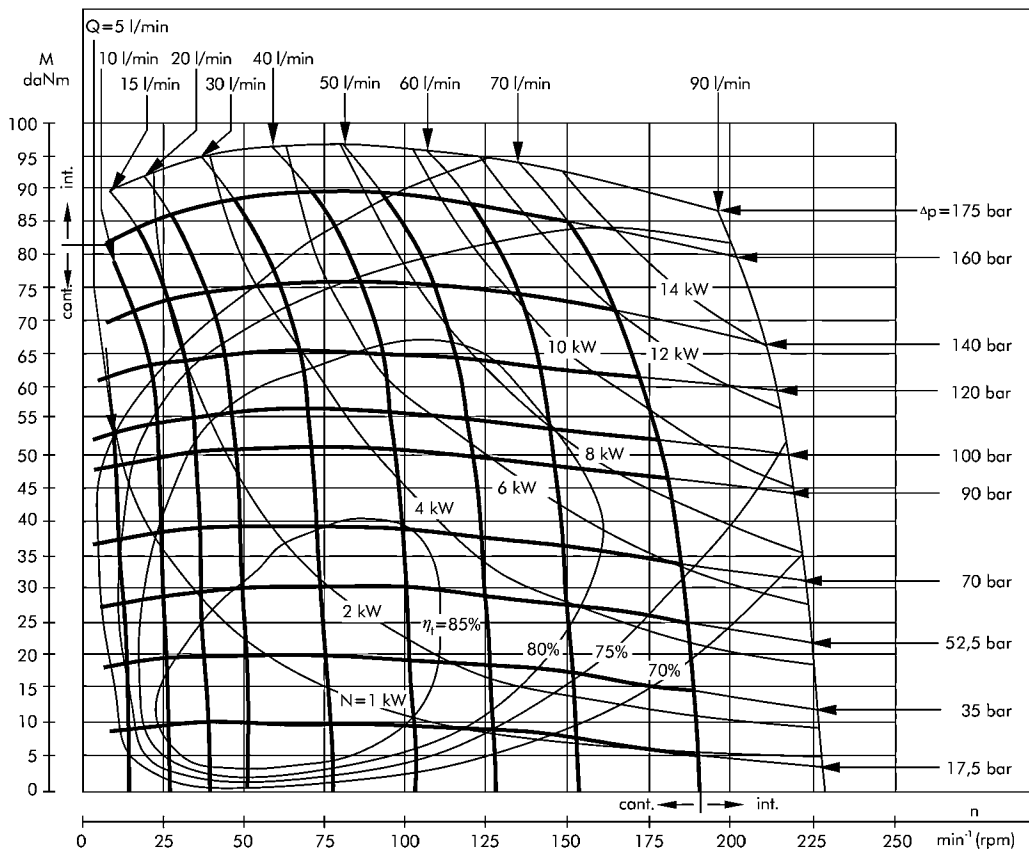


The function diagrams data was collected at back pressure 5+10 bar and oil with viscosity of 32 mm^2/s at 50° C.

The dimensions, mounting data, shaft extensions and permissible shaft loads are the same as at hydraulic motors type OS except following below.

DIMENSIONS OF THE ATTACHED COMPONENT


For OSYS

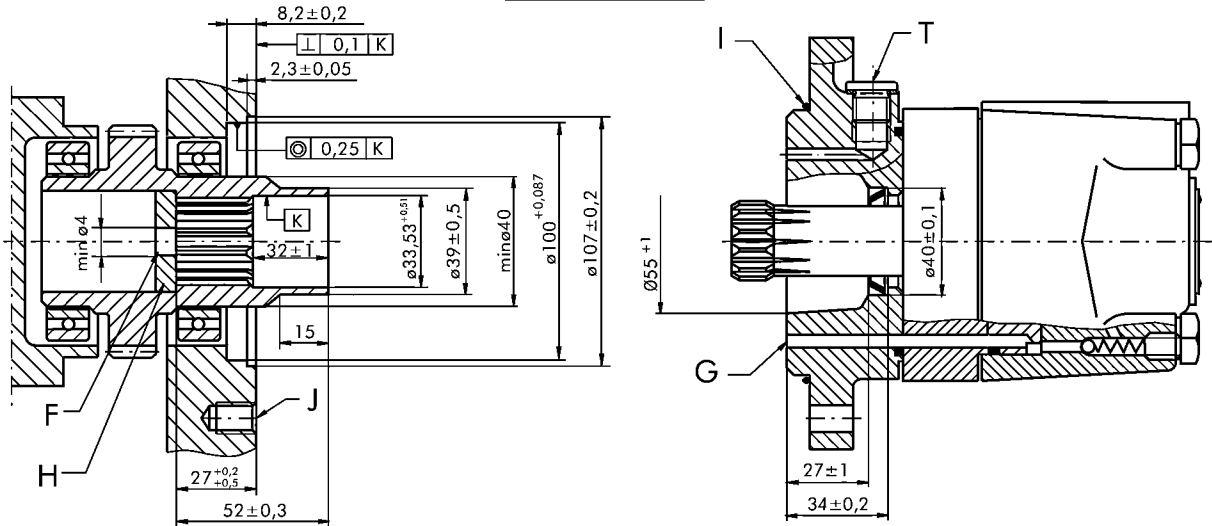

- F: Oil circulation hole
- G: Internal drain channel
- H: Hardened stop plate
- I: O- Ring 100x3mm

- J: 4xM10-16 mm depth (for OSS)
- N: Needle bearing 1 3/8"x1 3/4"
- T: Drain connection G1/4 or M14x1,5

For OSYV

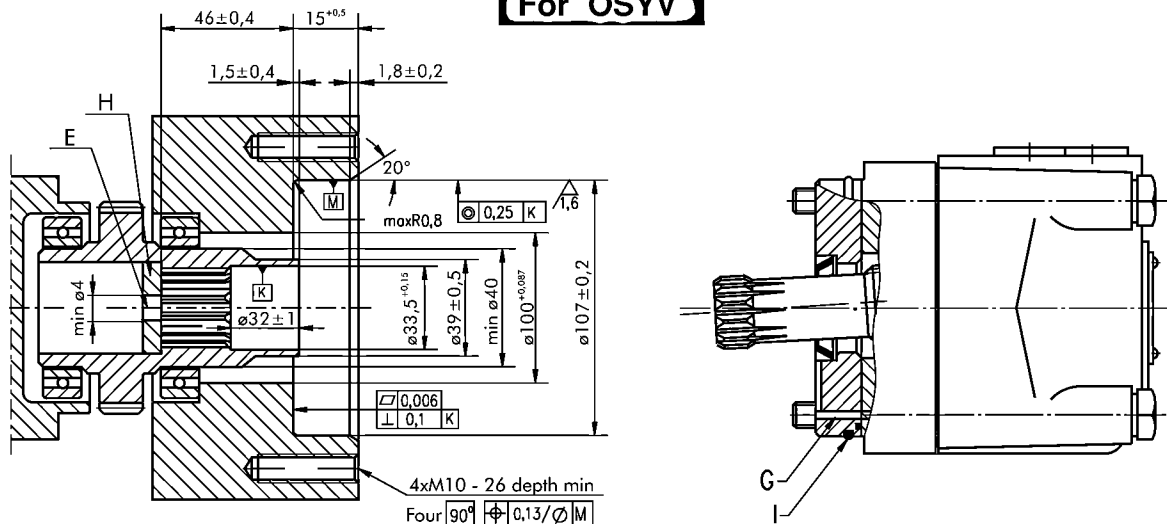

- E: External drain channel
- G: Internal drain channel

- H: Hardened stop plate
- I: O- Ring 85x2mm

DRAIN CONNECTION

A drain line ought to be used when pressure in the return line can exceed the permissible pressure. It can be connected:

- For OSYS at the drain port of the motor;
- For OSYV at the drain connection of the attached component. The maximum pressure in the drain line is limited by the attached component and its shaft seal.


The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT

Standard 12 DP 10/20 ANSI B92.1-1976, class 5
 [m=2.54; corrected x.m=+0,4]

Fillet Root Side Fit		mm
Number of Teeth	z	12
Diametrol Pitch	DP	10/20
Pressure Angle		30°
Pitch Dia.	D	30,48
Major Dia.	D _{ri}	33,2 ^{+0,4}
Minor Dia.	D _i	27,8 ^{+0,1}
Space Width [Circular]	L _o	4,45 ^{+0,071}
Fillet Radius	R _{min}	0,2
Max. Measurement between Pin	L	22,72 ^{+0,17}
Pin Dia.	d	5±0,001

Above are when hardened

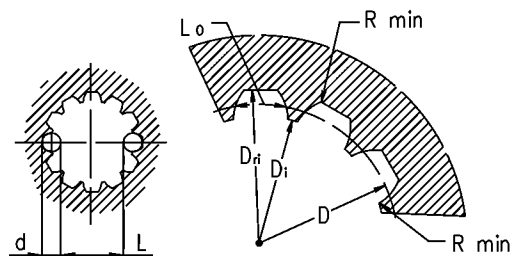

Hardening Specification:
 HRC 60±2
 Effective case depth (HRC 52) 0,7±0,2 mm
 Material: 20 MoCr4 DIN 17210 or better

ORDER CODE

	1	2	3	4	5	6	7	8	9
OSY									

Pos.1- Mounting Flange

- omit - SAE A mount, four holes
- A** - SAE A mount, two holes
- F** - Magneto mount, four holes
- Q** - Square mount, four holes
- S** - Short mount
- V** - Very short mount
- W** - Wheel mount

Pos.2- Port type

- omit - Side ports
- E** - Rear ports

Pos.3- Displacement code

- 160** - 159,7 [cm³/rev]
- 200** - 200,0 [cm³/rev]
- 250** - 250,0 [cm³/rev]
- 315** - 314,9 [cm³/rev]
- 400** - 397,0 [cm³/rev]

Pos.4- Shaft Extensions*

- C** - ø32 straight, Parallel key A10x8x45 DIN6885
- K** - ø35 tapered 1:10, Parallel key B6x6x20 DIN6885
- SL** - ø34,85 p.t.o. DIN 9611 Form 1
- SH** - ø1¼" splined 14T ANSI B92.1-1976

Pos.5- Ports

- omit - BSPP (ISO 228)
- M** - Metric (ISO 262)

Pos.6- Special Features (see Specification data page OSY - 03)

- omit - none
- LL** -Low Leakage
- LSV** - Low Speed Valve

Pos.7- Rotation

- omit - Standard Rotation
- R** - Reverse Rotation

Pos. 8- Option (Paint)**

- omit - no Paint
- P** - Painted
- PC** - Corrosion Protected Paint

Pos.9- Design Series

- omit - Factory specified

NOTES:

- * The permissible output torque for shafts must be not exceeded!
- ** Color at customer's request.


The hydraulic motors are manganophosphatized as standard.

HYDRAULIC MOTORS OT



APPLICATION

- » Conveyors;
- » Metal working machines;
- » Machines for agriculture;
- » Road building machines;
- » Mining machinery;
- » Food industries;
- » Special vehicles;
- » Plastic and rubber machinery etc.



CONTENTS

Specification data	OT-02
Function diagrams	OT-03+05
Dimensions and mounting	OT-06
Shaft extensions	OT-07
Dimensions and mounting- OTS, V	OT-08+09
Internal Spline data	OT-10
Permissible shaft loads	OT-10
Tacho connection	OT-13
Order code	OT-13

OPTIONS

- » Model: Disc valve, roll-gerotor
- » Flange with wheel mount;
- » Short motor;
- » Tacho and speed sensor connection;
- » Side and rear ports;
- » Shafts: straight, splined and tapered;
- » Metric and BSPP ports;
- » Other special features.


GENERAL

Displacement, [cm ³ /rev.]	161,1 ÷ 725
Max. Speed, [RPM]	625 ÷ 175
Max. Torque, [daNm]	47 ÷ 125
Max. Output, [kW]	20,2 ÷ 33,5
Max. Pressure Drop, [bar]	200 ÷ 115
Max. Oil Flow, [l/min]	100 ÷ 125
Min. Speed, [RPM]	10 ÷ 5
Permissible Shaft Loads, [daN]	P _{rod} =1700; P _a =1000
Pressure fluid	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range, [°C]	-30 ÷ 90
Optimal Viscosity range, [mm ² /s]	20 ÷ 75
Filtration	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

Oil flow in drain line

Pressure drop (bar)	Viscosity (mm ² /s)	Oil flow in drain line (l/min)
140	20	1,5
	35	1
210	20	3
	35	2

Pressure Losses

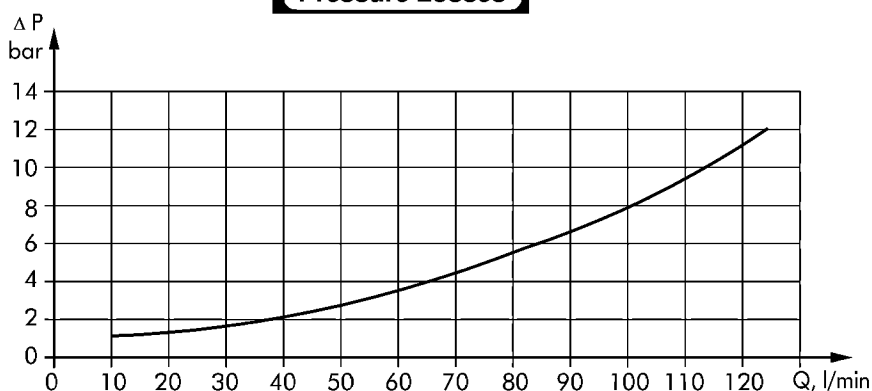

SPECIFICATION DATA

Type	OT 160	OT 200	OT 250	OT 315	OT 400	OT 500	OT 630	OT 725
Displacement [cm³/rev.]	161,1	201,4	251,8	326,3	410,9	523,6	612,3	725
Max. Speed, [RPM]	cont.	625	625	500	380	305	240	172
	Int.*	780	750	600	460	365	285	205
Max. Torque [daNm]	cont.	47	59	73	95	108	122	123
	Int.*	56	71	88	114	126	137	140
	peak**	66	82	102	133	144	160	165
Max. Output [kW]	cont.	26,5	33,5	33,5	33,5	30	26,5	20,2
	int.*	32	40	40	40	35	30	27,5
Max. Pressure Drop [bar]	cont.	200	200	200	200	180	160	140
	Int.*	240	240	240	240	210	180	160
	peak**	280	280	280	280	240	210	190
Max. Oil Flow [l/min]	cont.	100	125	125	125	125	125	125
	Int.*	125	150	150	150	150	150	151,4
Max. Inlet Pressure [bar]	cont.	210	210	210	210	210	210	210
	Int.*	250	250	250	250	250	250	250
	peak**	300	300	300	300	300	300	300
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line, [bar]	cont. 0-100 RPM	75	75	75	75	75	75	75
	cont. 100-300 RPM	40	40	40	40	40	40	40
	cont. >300 RPM	20	20	20	20	20	-	-
	Int.* 0-max. RPM	75	75	75	75	75	75	75
Max. Return Pressure with Drain Line [bar]	cont.	140	140	140	140	140	140	140
	Int.*	175	175	175	175	175	175	175
	peak**	210	210	210	210	210	210	210
Max. Starting Pressure with Unloaded Shaft, [bar]	10	10	10	10	10	10	10	10
Min. Starting Torque [daNm]	at max. press. drop cont.	34	43	53	74	84	95	95
	at max. press. drop Int.*	41	52	63	89	97	106	110
Min. Speed***, [RPM]	10	9	8	7	6	5	5	5
Weight, [kg]	OT	20	20,5	21	22	23	24	25
	OTW	22	22,5	23	24	25	26	27
	OTS	15	15,5	16	17	18	19	20
	OTV	11	11,5	12	13	14	15	16

* Intermittent operation: the permissible values may occur for max. 10% of every minute.


** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 5 RPM lower than given, consult factory or your regional manager.


- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil, HLP(DIN51524) or HM(ISO6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 13 mm²/s at 50°C.
- 5) Recommended maximum system operating temperature is 82°C.
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

FUNCTION DIAGRAMS

OT 160

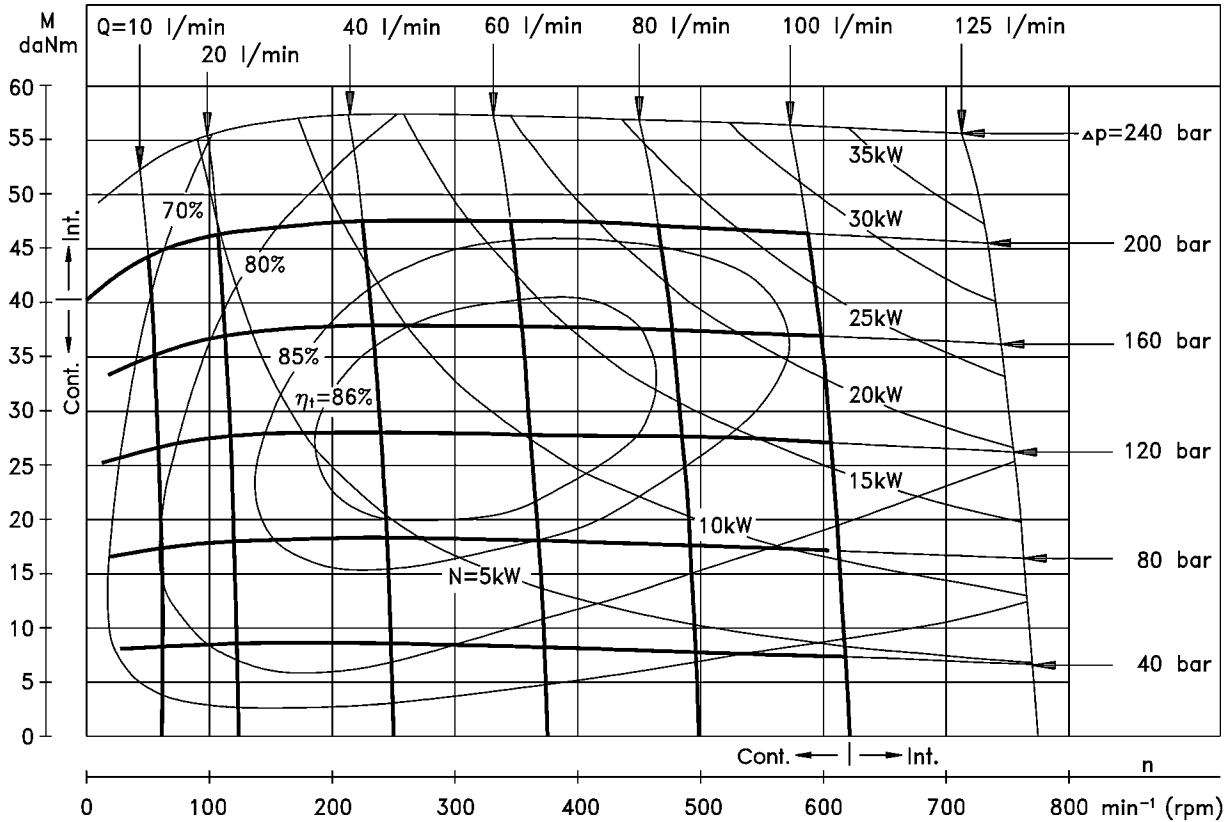


OT 200

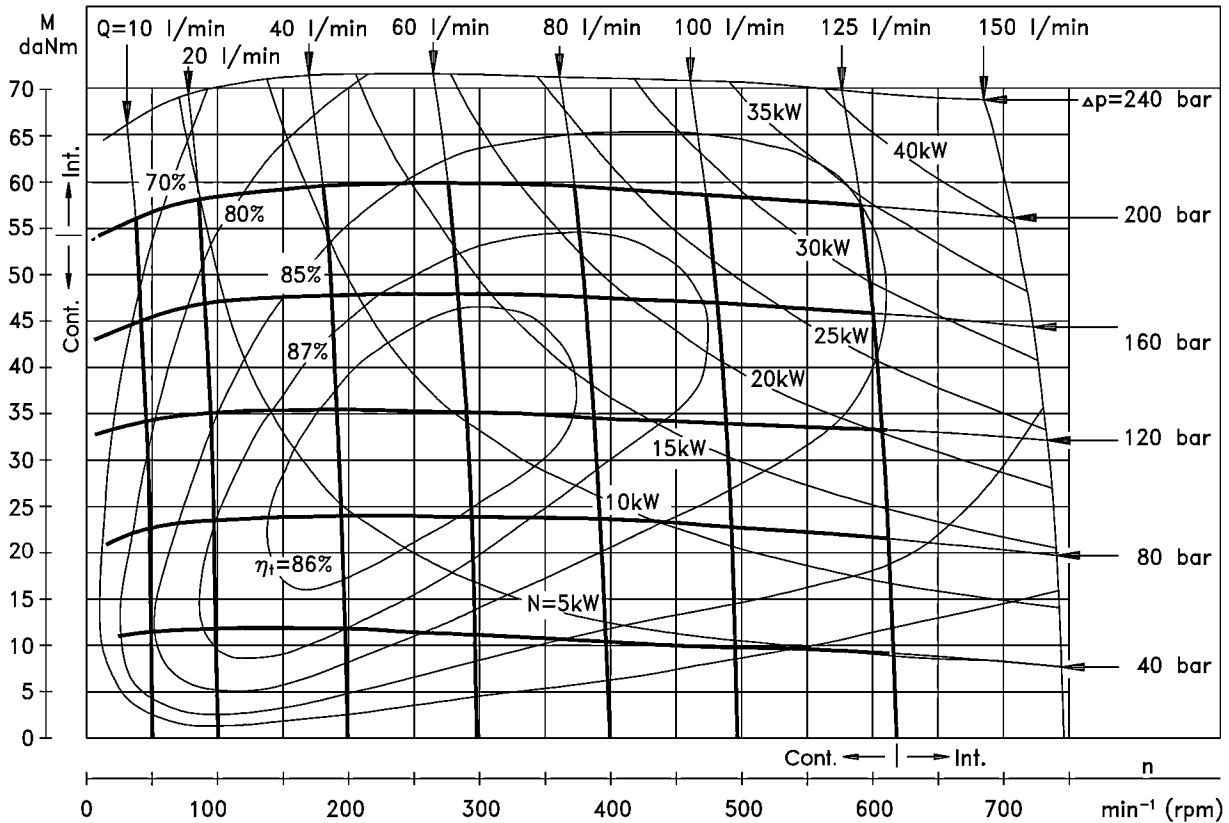


The function diagrams data was collected at back pressure 5÷10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OT 250

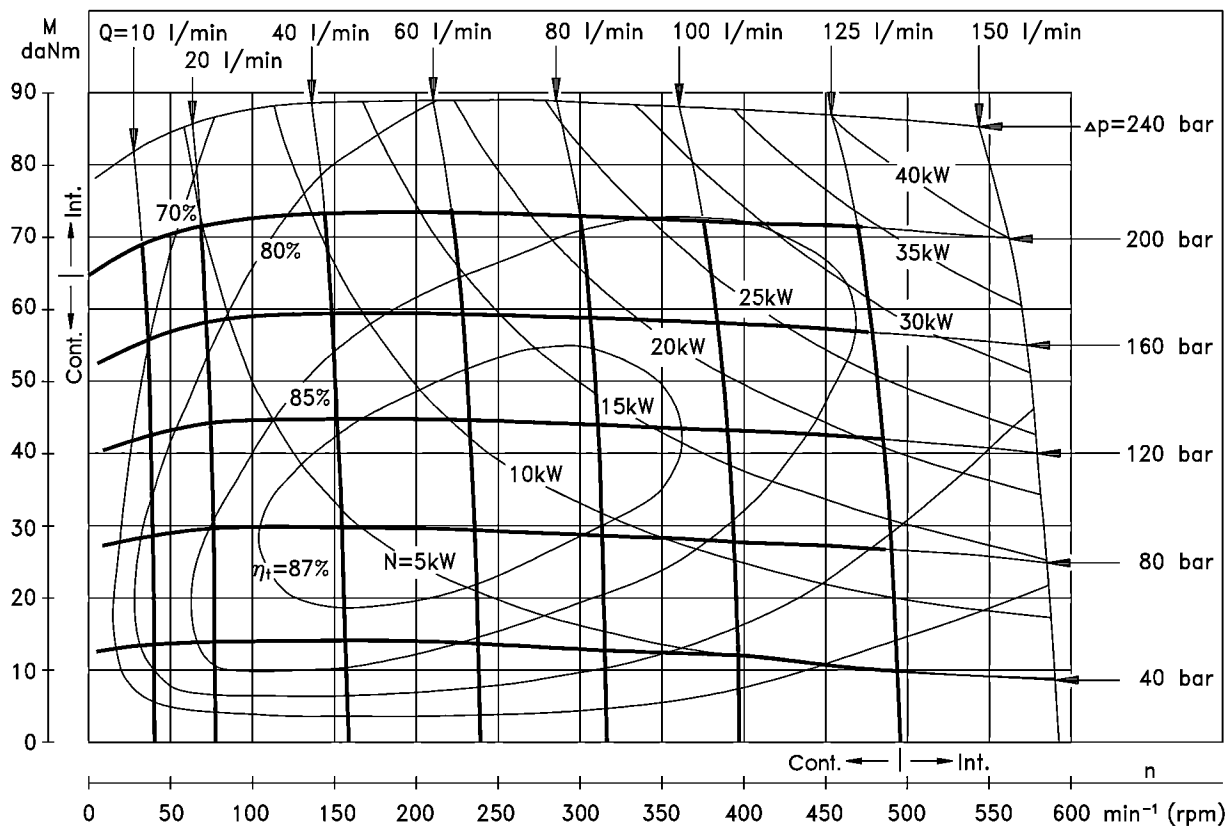


OT 315

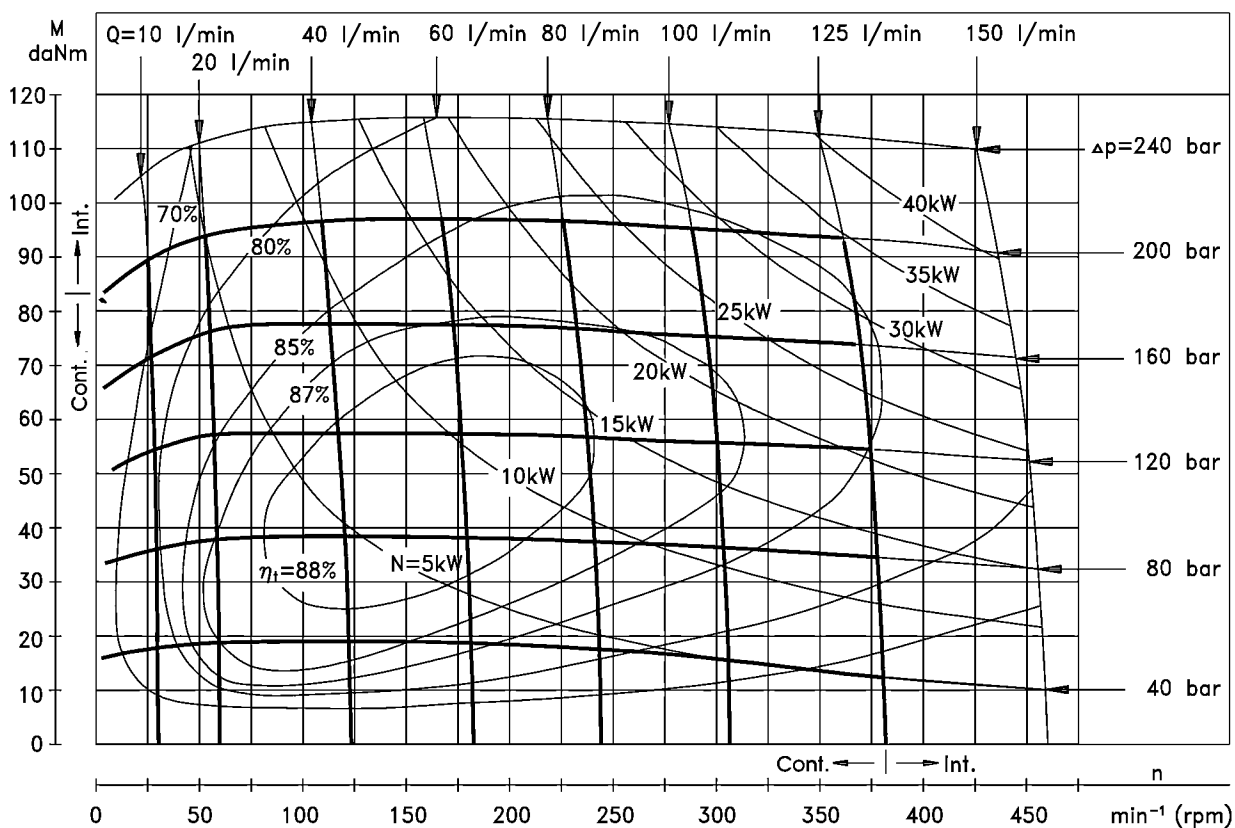


FUNCTION DIAGRAMS

OT 400

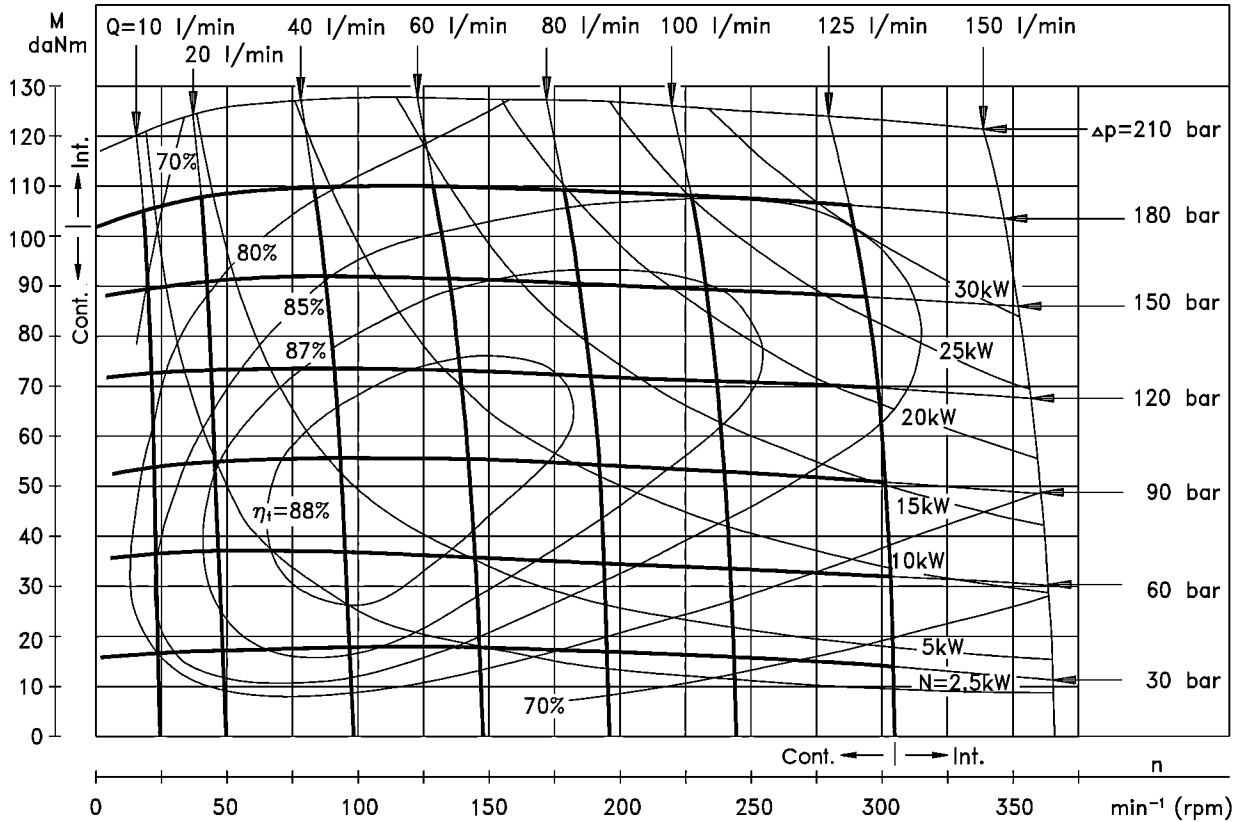


OT 500

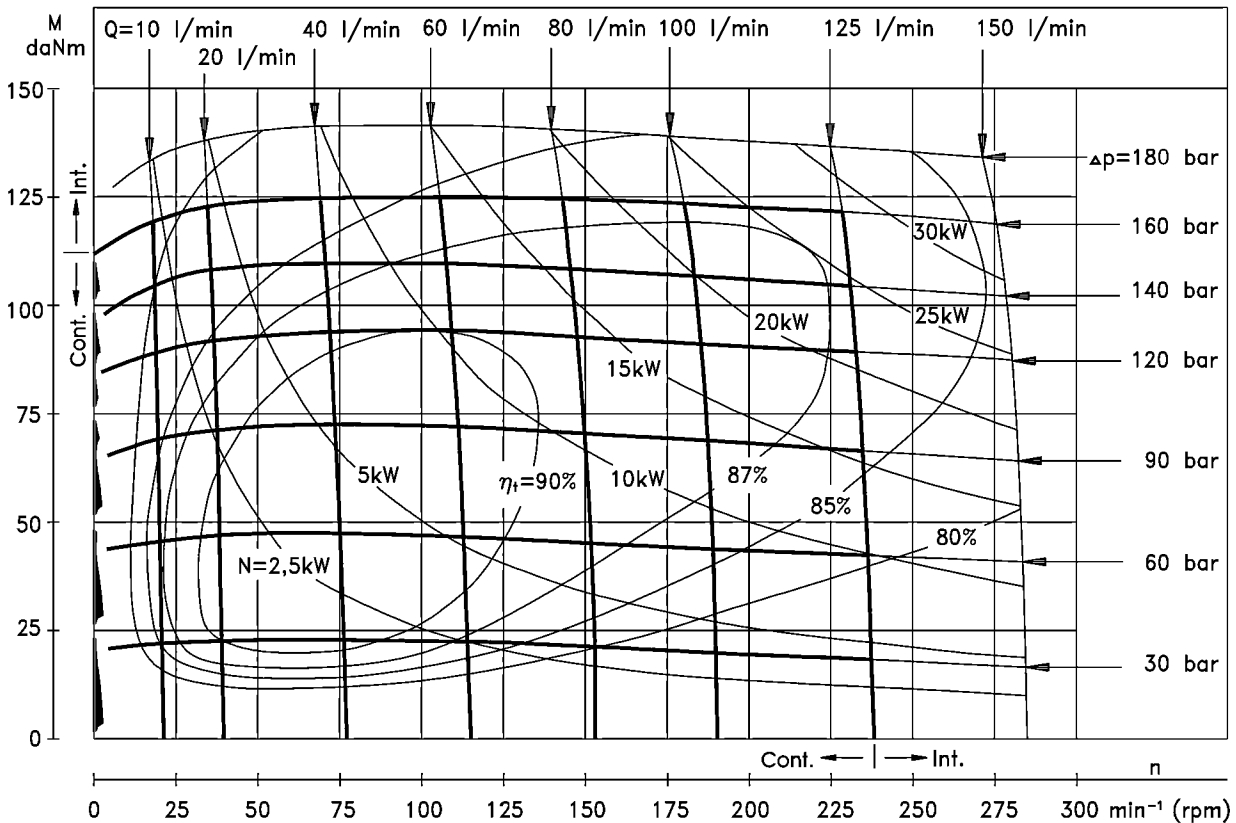

The function diagrams data was collected at back pressure 5±10 bar and oil with viscosity of 32 mm²/s at 50° C.

DIMENSIONS AND MOUNTING DATA

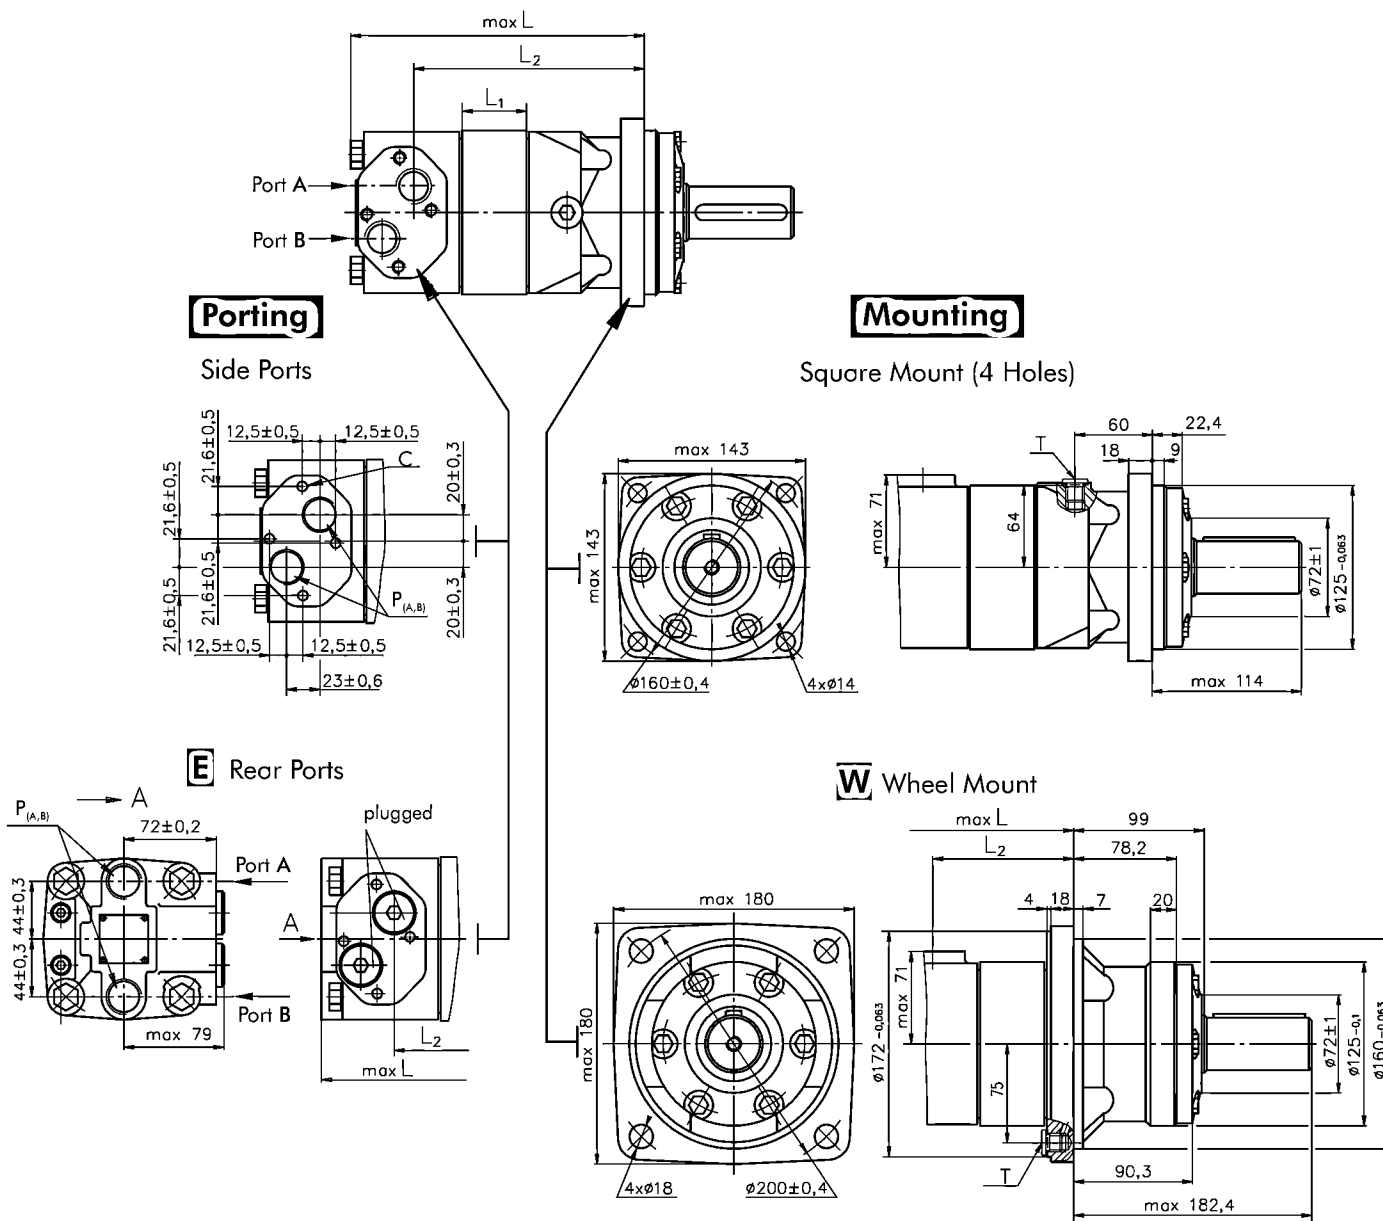

Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW

Reverse Rotation
Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW


C: 4xM10-10 mm depth
P_(A,B): 2xG3/4 or 2xM27x2-17 mm depth
T: G 1/4 or M14x1,5 - 12 mm depth (plugged)

Type	L, mm	Type	L, mm	L ₂ , mm	Type	L, mm	Type	L, mm	L ₂ , mm	*L ₁ , mm
OT 160	190	OTE 160	200	140	OTW 160	123	OTWE 160	133	73	16,5
OT 200	195	OTE 200	205	145	OTW 200	128	OTWE 200	138	78	21,5
OT 250	201	OTE 250	211	151	OTW 250	134	OTWE 250	144	84	27,8
OT 315	211	OTE 315	221	161	OTW 315	144	OTWE 315	154	94	37,0
OT 400	221	OTE 400	231	171	OTW 400	154	OTWE 400	164	104	47,5
OT 500	235	OTE 500	245	185	OTW 500	168	OTWE 500	178	118	61,5
OT 630	242,5	OTE 630	252,5	192,5	OTW 630	175,5	OTWE 630	185,5	125,5	72,5
OT 725	260	OTE 725	270	210	OTW 725	193	OTWE 725	193	143	86,5


* The width of the gerolator is 3,5 mm greater than L₁.

SHAFT EXTENSIONS


C - $\phi 40$ straight, Parallel key A12x8x70 DIN 6885
Max. Torque 132,8 daNm

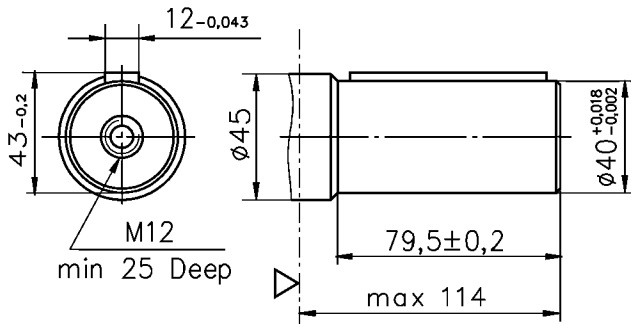


K -tapered 1:10, Parallel key B12x8x28 DIN 6885
Max. Torque 210,7 daNm

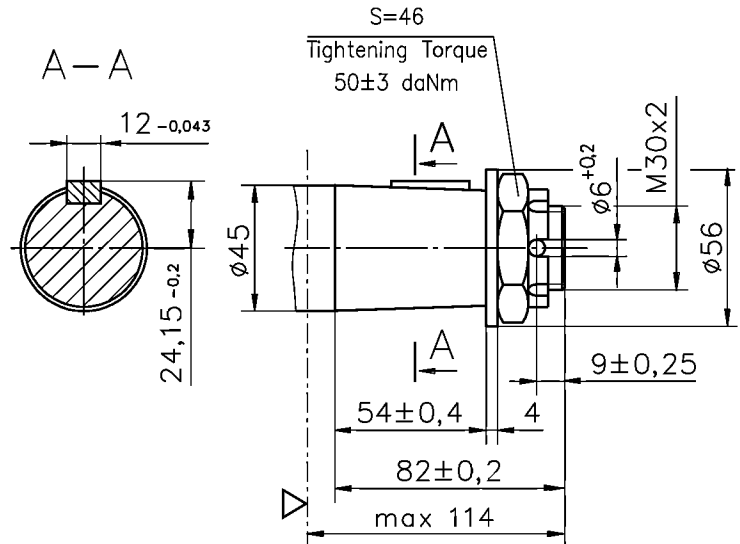


CO - $\phi 1\frac{1}{2}$ " straight, Parallel key $\frac{3}{8}$ "x $\frac{3}{8}$ "x $2\frac{1}{4}$ " BS46
Max. Torque 132,8 daNm

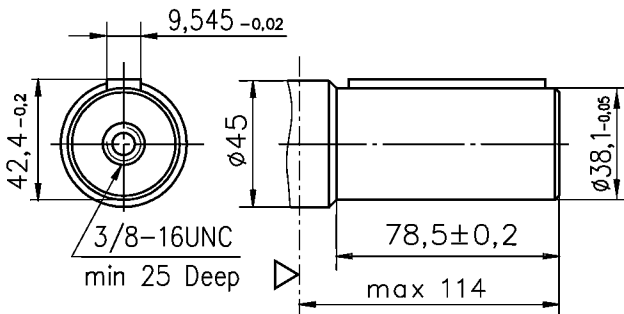

SH - $\phi 1\frac{1}{2}$ " splined 17T, DP 12/24 ANSI B92.1-1976
Max. Torque 132,8 daNm

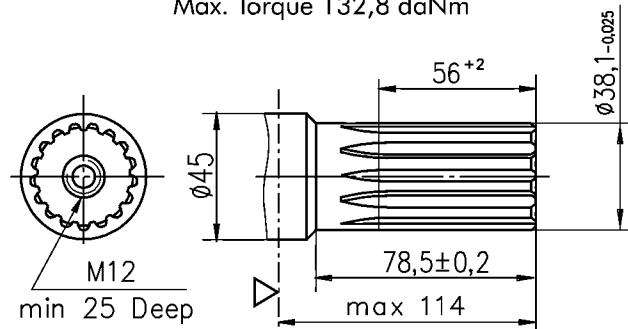


SL - $\phi 34,85$ p.t.o. DIN 9611 Form 1
Max. Torque 77 daNm

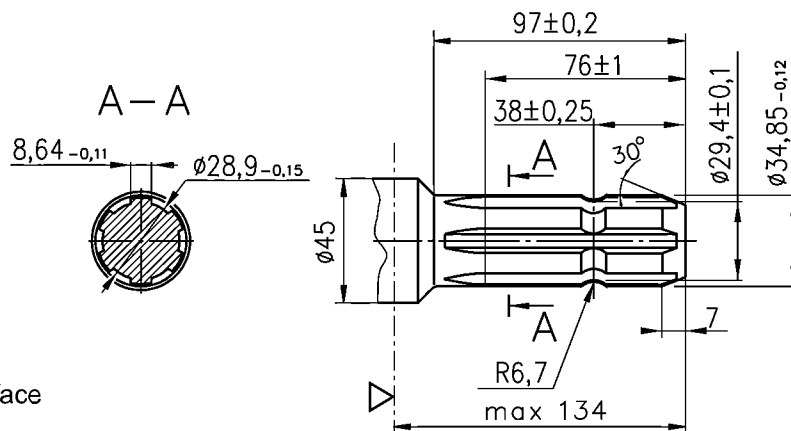

▽ - Motor Mounting Surface

DIMENSIONS AND MOUNTING DATA - OTS and OTV

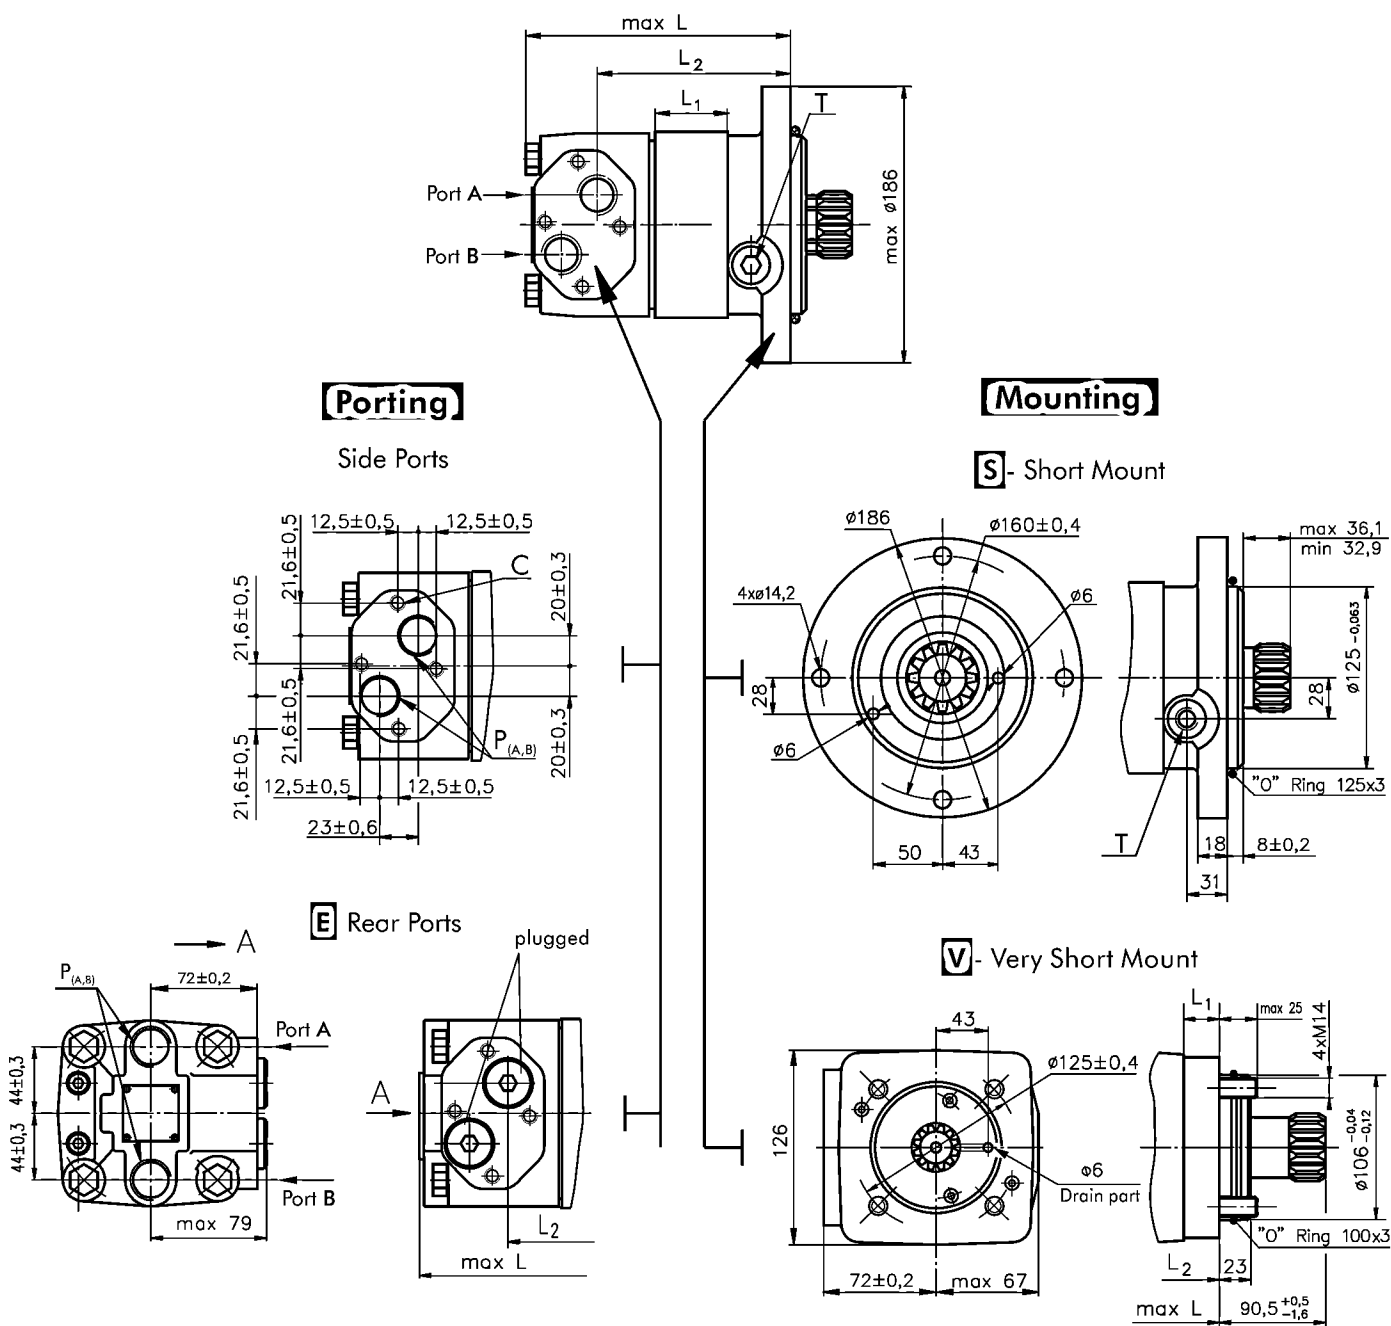

Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW

Reverse Rotation
Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW


C: 4xM10-10 mm depth
P_(A,B): 2xG3/4 or 2xM27x2-17 mm depth
T: G 1/4 or M14x1,5 - 12 mm depth (plugged)

Type	L, mm	Type	L, mm	L ₂ , mm	Type	L, mm	Type	L, mm	L ₂ , mm	*L ₁ , mm
OTS 160	146	OTSE 160	156	96	OTV 160	101	OTVE 160	111	51,5	16,5
OTS 200	151	OTSE 200	161	101	OTV 200	106	OTVE 200	116	56,5	21,5
OTS 250	157	OTSE 250	167	107	OTV 250	112	OTVE 250	122	62,8	27,8
OTS 315	166	OTSE 315	176	116	OTV 315	121	OTVE 315	131	72	37,0
OTS 400	177	OTSE 400	187	127	OTV 400	132	OTVE 400	142	82,5	47,5
OTS 500	191	OTSE 500	201	142	OTV 500	146	OTVE 500	156	96,5	61,5
OTS 630	198,5	OTSE 630	208,5	146,5	OTV 630	153,5	OTVE 630	163,5	104	72,5
OTS 725	216	OTSE 725	226	167	OTV 725	171	OTVE 725	181	121,5	86,5


* The width of the gerolor is 3,5 mm greater than L₁.

DIMENSIONS OF THE ATTACHED COMPONENT

OTS

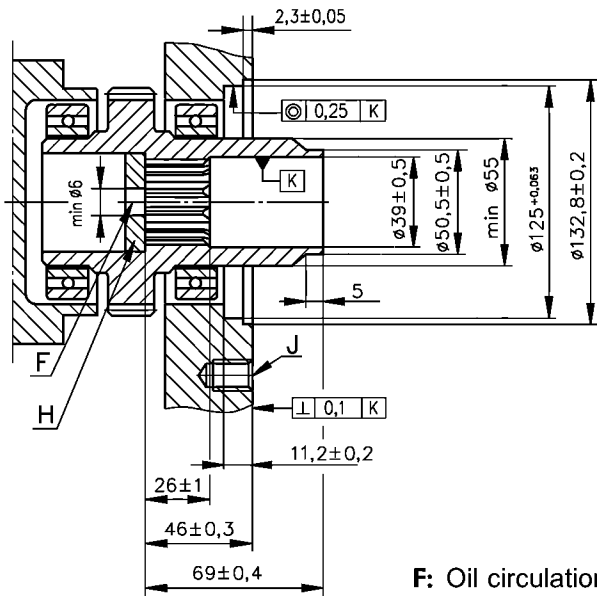


F: Oil circulation hole
G: Internal drain channel
H: Hardened stop plate

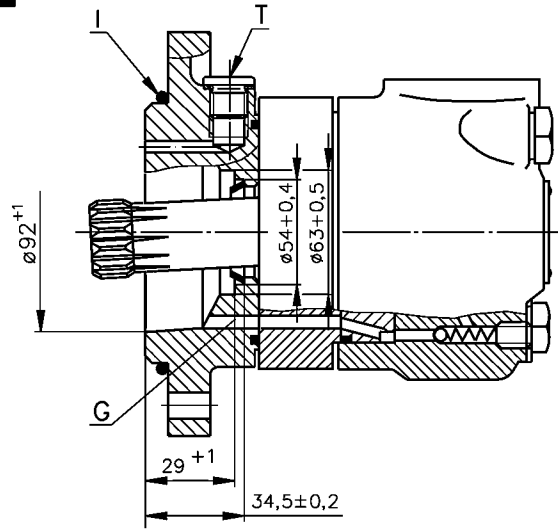


I: O- Ring 125x3mm
J: 4xM12-18 mm depth, 90°
T: Drain connection G1/4 or M14x1,5

OTV

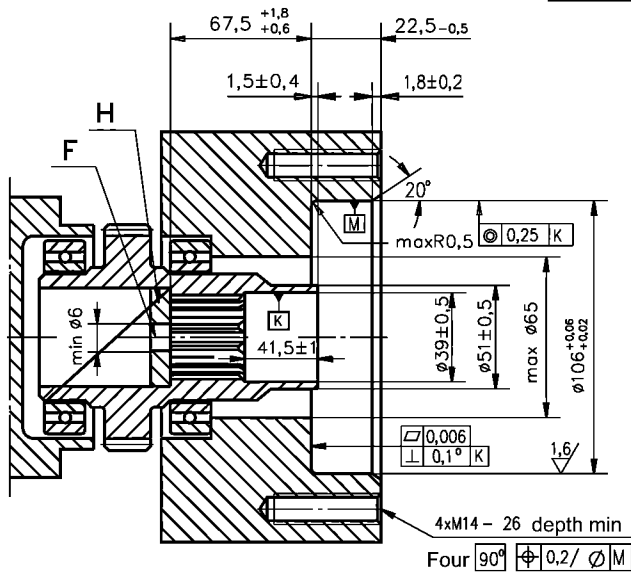

F: Oil circulation hole
G: Internal drain channel

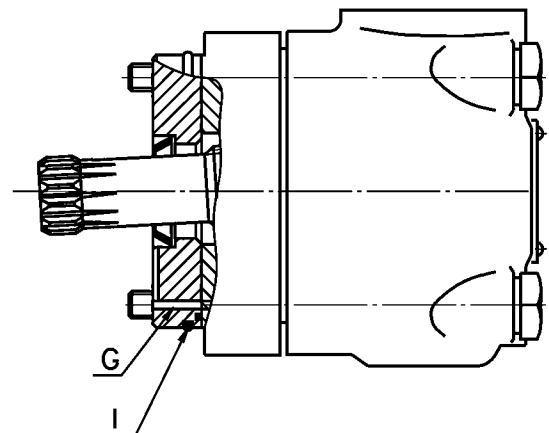

H: Hardened stop plate
I: O- Ring 100x3mm

DRAIN CONNECTION

A drain line ought to be used when pressure in the return line can exceed the permissible pressure. It can be connected:


- For OTS at the drain port of the motor;
- For OTV at the drain connection of the attached component. The maximum pressure in the drain line is limited by the attached component and its shaft seal.

The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT

Standard ANSI B92.1-1976, class 5
 [$m = 2.1166$; corrected $x.m = +1,0$]


Fillet Root Side Fit		mm
Number of Teeth	z	16
Diametral Pitch	DP	12/24
Pressure Angle		30°
Pitch Dia.	D	33,8656
Major Dia.	D _{ri}	$38,4^{+0,4}$
Minor Dia.	D _i	$32,15^{+0,04}$
Space Width [Circular]	L _o	$4,516 \pm 0,037$
Fillet Radius	R _{min}	0,5
Max. Measurement between Pin	L	$26,9^{+0,10}$
Pin Dia.	d	$4,835 \pm 0,001$

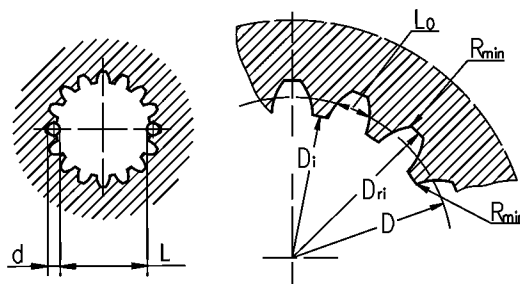

Hardening Specification:
 HRC 60±2
 HRC 52
 0,7±0,2 mm effective case depth
 Material 20 MoCr4 DIN 17210 or better

PERMISSIBLE SHAFT LOADS


The output shaft runs in tapered bearings that permit high axial and radial forces. Curve "1" shows max. radial shaft load. Any shaft load exceeding the values quoted in the curve will seriously reduce motor life. The two other curves apply to a B10 bearing life of 3000 hours at 200 RPM.

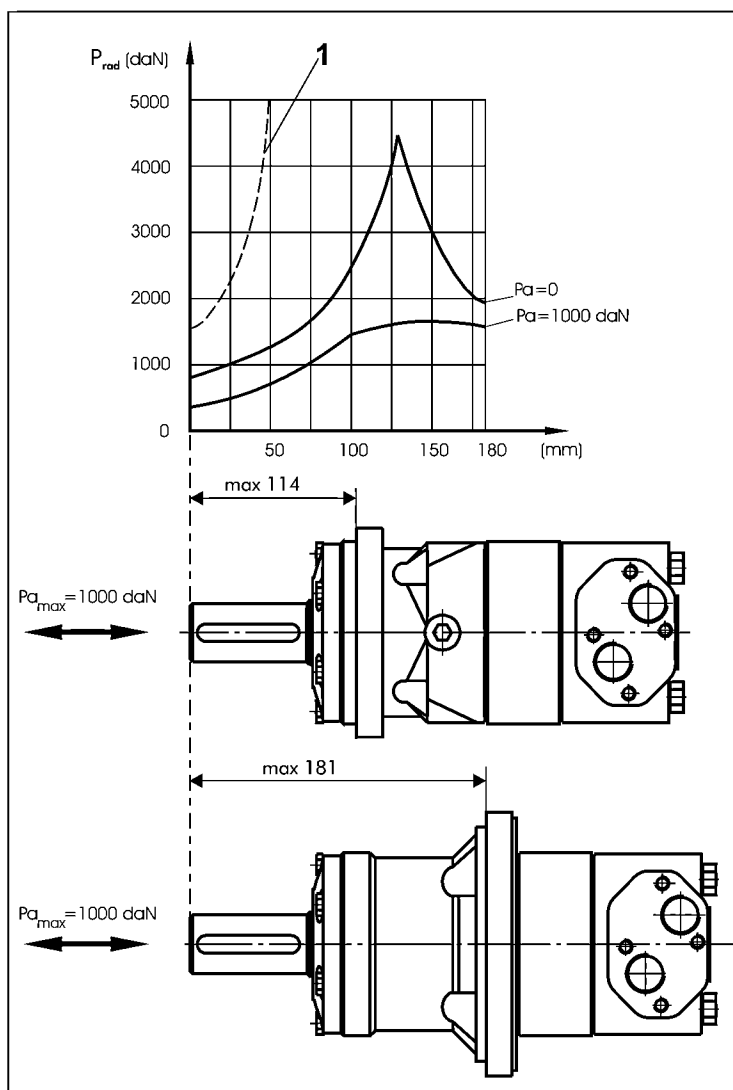

Hydraulic motors with speed sensor type OT...RS

MetaHydraulic is introducing a hydraulic motor with a new generation of speed sensor. The electric output signal is a standard voltage signal that can be used for regulating the speed of a motor.

The speed is measured by a sensor in accordance with the Hall principle. Signal processing and amplification are performed in the sensor housing. A connection is provided in the housing by a Plug connector M12 Series.

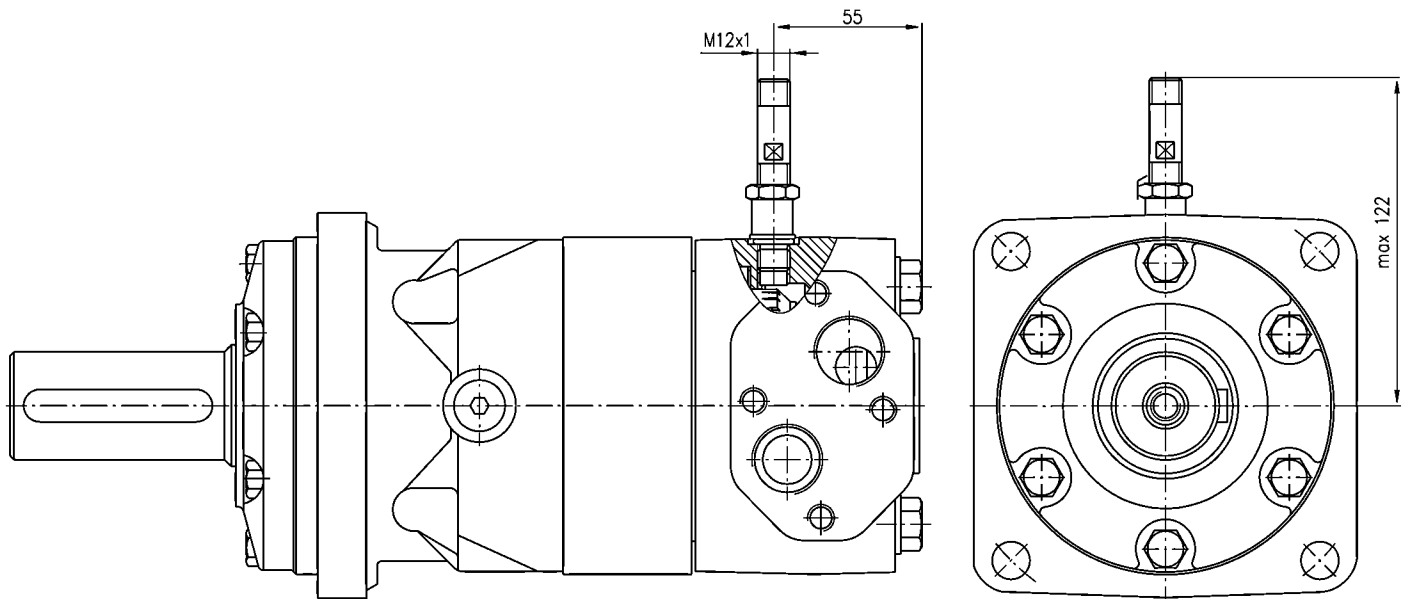


This performance is applicable for all motors of OT series. The main technical features correspond to the standard motors series OT.

DIFFERENTIAL HALL SENSOR

Technical data

Frequency range	3...20 000 Hz
Output	PNP
Power supply	10...36 VDC
Current input	20 mA (@24 VDC)
Current load	500 mA (@24 VDC; 24°C)
Ambient Temperature	minus 40... plus 125°C
Protection	IP 67
Plug connector	M12-Series
Mounting principle	ISO 6149
Pulses per revolution	84


Output signal

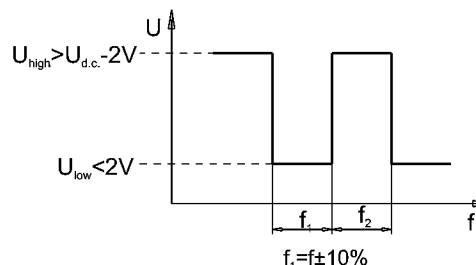


Load max.: $I_{high} = I_{low} < 50\text{mA}$
 No load current, max: 20 mA

Wiring diagram


PNP

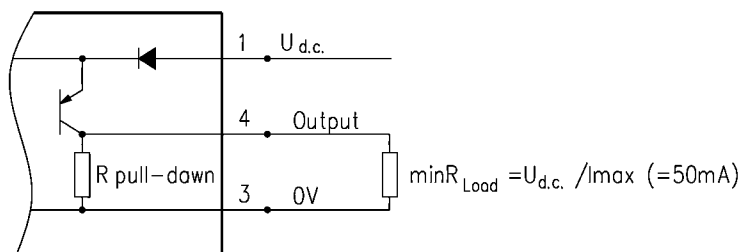

NPN

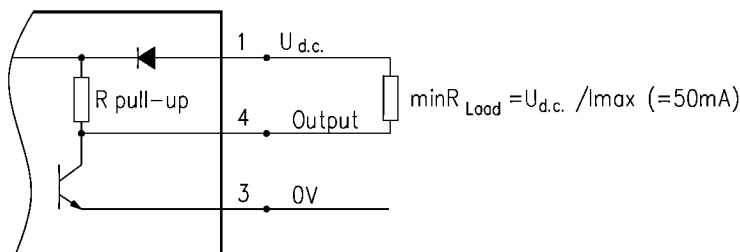


Stik type



Terminal No.	Connection
1	$U_{d.c.}$
2	No connection
3	0V
4	Output signal

MOTORS WITH TACHO CONNECTION - Option "T"

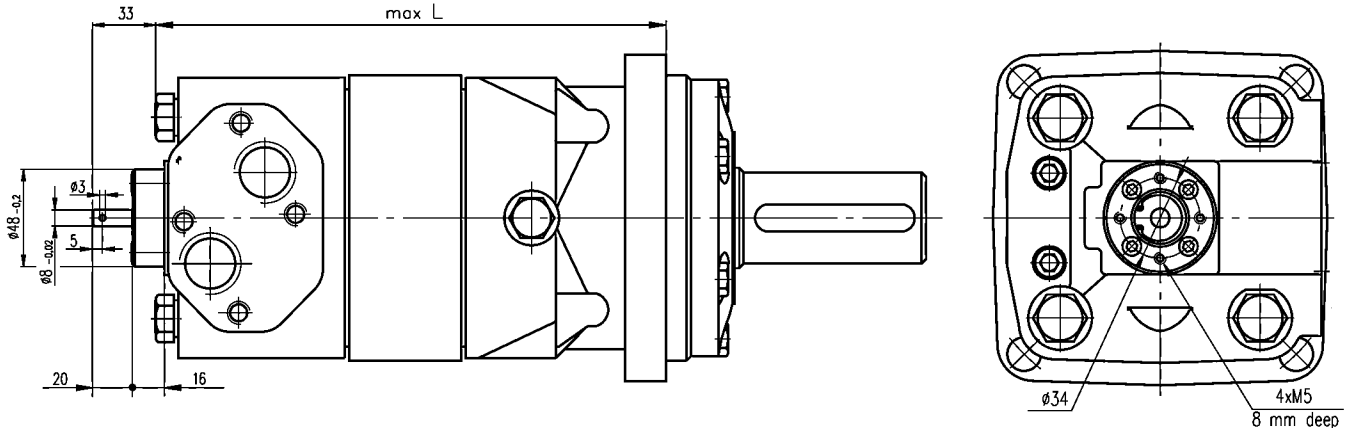

ORDER CODE

	1	2	3	4	5	6	7	8	9	10
O	T									

Pos.1- Mounting Flange

omit - Square mount, four holes

- S** - Short mount
- V** - Veryshort mount
- W** - Wheel mount

Pos.2- Port type

omit - Side ports

- E** - Rear ports

Pos.3- Displacement code

- 160** - 161,1[cm³/rev]
- 200** - 201,4[cm³/rev]
- 250** - 251,8[cm³/rev]
- 315** - 326,3[cm³/rev]
- 400** - 410,9[cm³/rev]
- 500** - 523,6[cm³/rev]
- 630** - 612,3[cm³/rev] (without Function diagram)
- 725** - 725,0[cm³/rev] (without Function diagram)

Pos.4- Shaft Extensions*

- C** - ø40 straight, Parallel key A12x8x70 DIN6885
- CO** - ø1½" straight, Parallel key 3/8"x3/8"x2¼" BS46
- K** - ø45 tapered 1:10, Parallel key B12x8x28 DIN6885
- SL** - ø34,85 p.t.o. DIN 9611 Form 1
- SH** - ø1½" splined 17T ANSI B92.1-1976

Pos.5- Ports

omit - BSPP (ISO 228)

- M** - Metric (ISO 262)

Pos.6- Speed Monitoring

omit - none

- T** - with tacho connection (only for side ports)
- RS-P** - with speed sensor (PNP pull-down resistor)
- RS-N** - with speed sensor (NPN pull-up resistor)

Pos.7- Special Features

omit - none

- LL** -Low Leakage
- LSV** - Low Speed Valve

Pos.8- Rotation

omit - Standard Rotation

- R** - Reverse Rotation

Pos. 9- Option (Paint)**

omit - no Paint

- P** - Painted
- PC** - Corrosion Protected Paint

Pos.10- Design Series

omit - Factory specified

NOTES:

* The permissible output torque for shafts must be not exceeded!

** Color at customer's request.


The hydraulic motors are mangano-phosphatized as standard.

LOW SPEED HIGH TORQUE MOTORS OTM

INTRODUCTION


Meta Hydraulic is now able to offer the new hydraulic motor type OTM, which is based on the well-known OT motor.

This motor is developed for transmission systems with larger pressure drop and higher torque. It's design is remarkable with strengthened inner element and new geroller set.

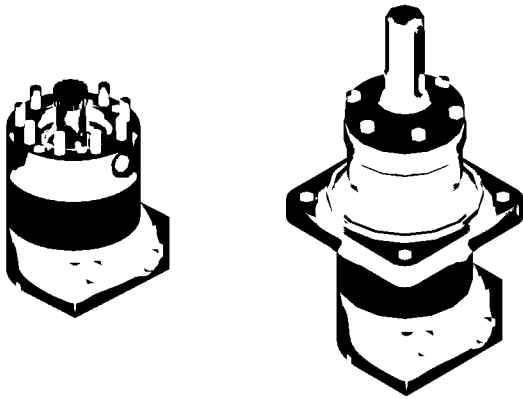


APPLICATION

- » Skid Steer Loaders
- » Metal working machines
- » Trenchers
- » Augers
- » Machines for agriculture
- » Road building machines
- » Special vehicles
- » Mine machines
- » Woodworking and sawmill machinery
- » Conveyors etc.



OPTIONS

- » Model- Disc valve, roll-gerotor
- » Flange with wheel mount
- » Short motor
- » Side ports
- » Shafts- straight, splined and tapered
- » BSPP ports;
- » Other special features.



EXCELLENCE

- » High torque and pressure drop
- » High inlet pressure
- » High starting torque
- » Improved efficiency at high pressure drop
- » Smooth operation at low speed

GENERAL


Displacement,	[cm ³ /rev.]	201,4 ÷ 523,6
Max. Speed,	[RPM]	625 ÷ 240
Max. Torque,	[daNm]	72 ÷ 172
Max. Output,	[kW]	29 ÷ 37,5
Max. Pressure Drop,	[bar]	230 ÷ 185
Max. Oil Flow,	[l/min]	125
Min. Speed,	[RPM]	5
Permissible Shaft Loads,	[daN]	P _a = 1000
Pressure fluid		Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range,	[°C]	-30 ÷ 90
Optimal Viscosity range, [mm ² /s]		20 ÷ 75
Filtration		ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

Oil flow in drain line

Pressure drop (bar)	Viscosity (mm ² /s)	Oil flow in drain line (l/min)
140	20	1,5
	35	1
210	20	3
	35	2

ΔP
bar

Pressure Losses

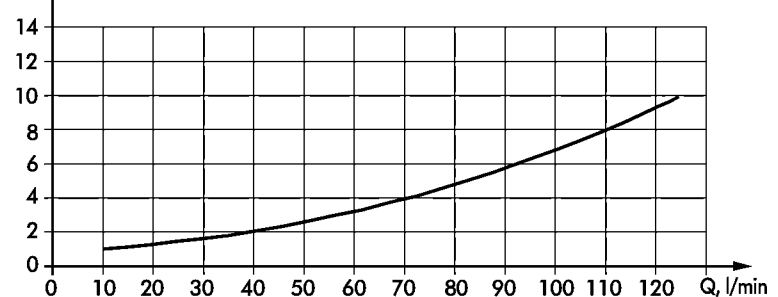

SPECIFICATION DATA

Type	OTM 200	OTM 250	OTM 315	OTM 400	OTM 470	OTM 500	
Displacement [cm ³ /rev.]	201,4	251,8	326,3	410,9	475	523,6	
Max. Speed, [RPM]	'cont.	625	500	380	305	260	240
	Int.*	750	600	460	365	315	285
Max. Torque [daNm]	'cont.	72	90	116	147	171	172
	Int.*	102	128	163	206	215	215
	peak**	115	144	186	235	240	240
Max. Output [kW]	'cont.	41	41	41	41	41	37,5
	int.*	65	70	70	75	55	51
Max. Pressure Drop [bar]	'cont.	250	250	250	250	250	230
	Int.*	350	350	350	350	315	280
	peak**	400	400	400	400	350	320
Max. Oil Flow [l/min]	'cont.	125	125	125	125	125	125
	Int.*	150	150	150	150	150	150
Max. Inlet Pressure [bar]	'cont.	270	270	270	270	270	270
	Int.*	370	370	370	370	370	370
	peak**	420	420	420	420	420	420
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line , [bar]	'cont. 0-100 RPM	75	75	75	75	75	75
	'cont. 100-300 RPM	40	40	40	40	40	40
	'cont. >300 RPM	20	20	20	20	20	-
	Int.* 0-max. RPM	75	75	75	75	75	75
Max. Return Pressure with Drain Line [bar]	'cont.	270	270	270	270	270	270
	Int.*	370	370	370	370	370	370
	Peak**	420	420	420	420	420	420
Max. Starting Pressure with Unloaded Shaft, [bar]	6	6	6	6	6	6	
Min. Starting Torque [daNm]	60	75	97	122	142	143	
Min. Speed***, [RPM]	5	5	5	5	5	5	
Weight, [kg]	MTM	26,9	27,3	28,1	29	29,7	30,2
	MTMW	27,4	27,8	28,6	29,5	30,2	30,7
	MTMV	15,7	16,1	16,9	17,8	18,5	19


* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 5 RPM lower than given, consult factory or your regional manager.


- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil, HLP(DIN51524) or HM(ISO6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 13 mm²/s at 50°C.
- 5) Recommended maximum system operating temperature is 82°C.
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

DIMENSIONS - OTM AND OTMC

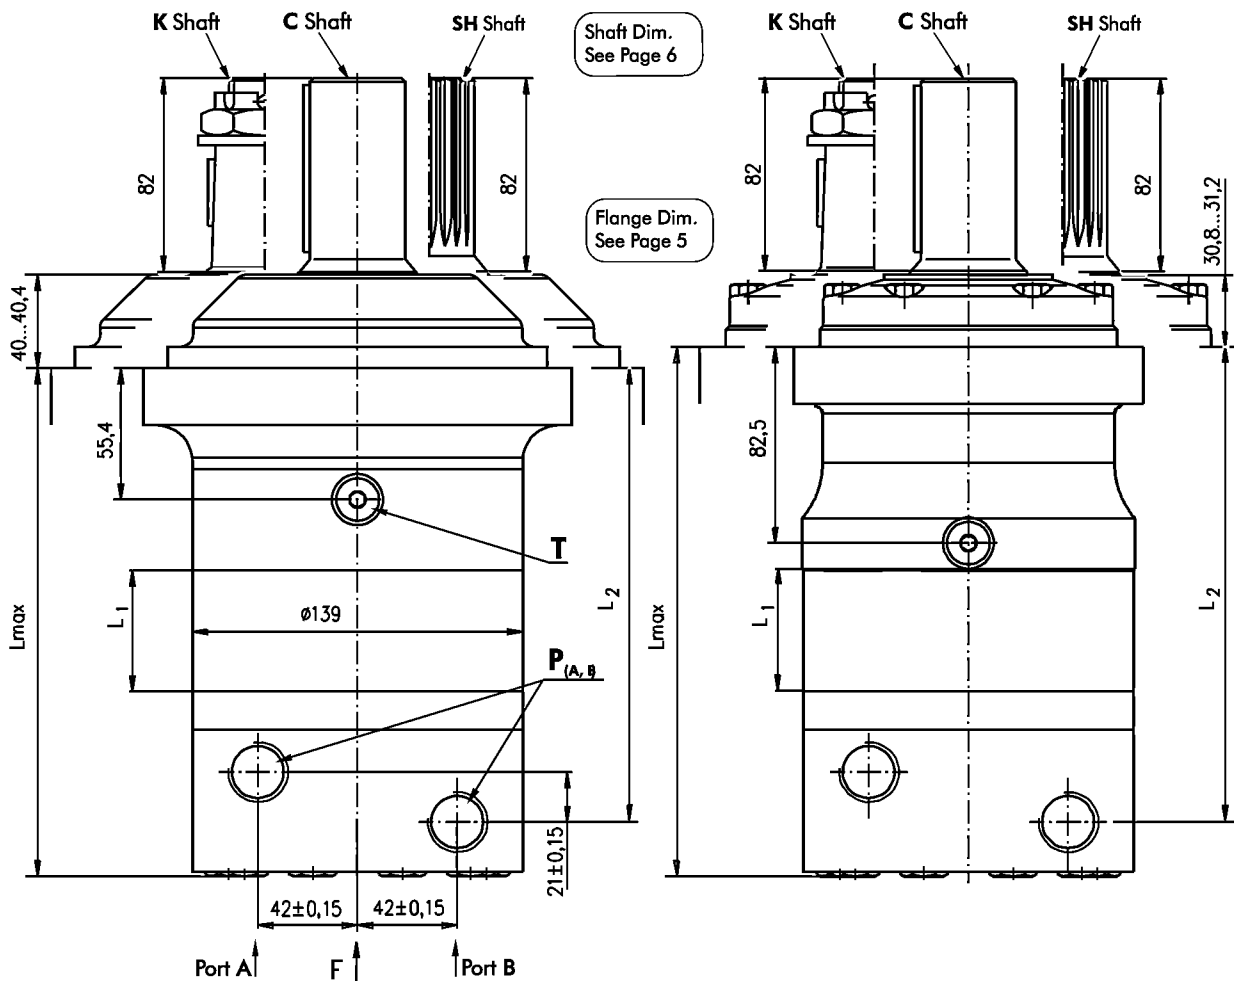

Standard Rotation
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW


Reverse Rotation
Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW

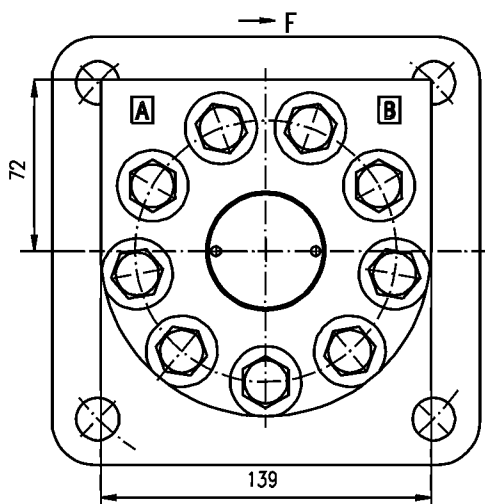

P_(A,B): 2xG3/4 - 17 mm depth
T : G1/4 - 12 mm depth (plugged)

Type	L _{max} ,mm	L ₂ , mm	Type	L _{max} ,mm	L ₂ , mm	L ₁ , mm
OTM 200	188	163,3	OTMC 200	197	174	25
OTM 250	194	169,6	OTMC 250	203	180,3	31,3
OTM 315	203	178,5	OTMC 315	212,2	189,5	40,5
OTM 400	214	189,3	OTMC 400	223	200	51
OTM 470	222	197,3	OTMC 470	231	208	59
OTM 500	228	203,3	OTMC 500	237	214	65

DIMENSIONS - OTMW

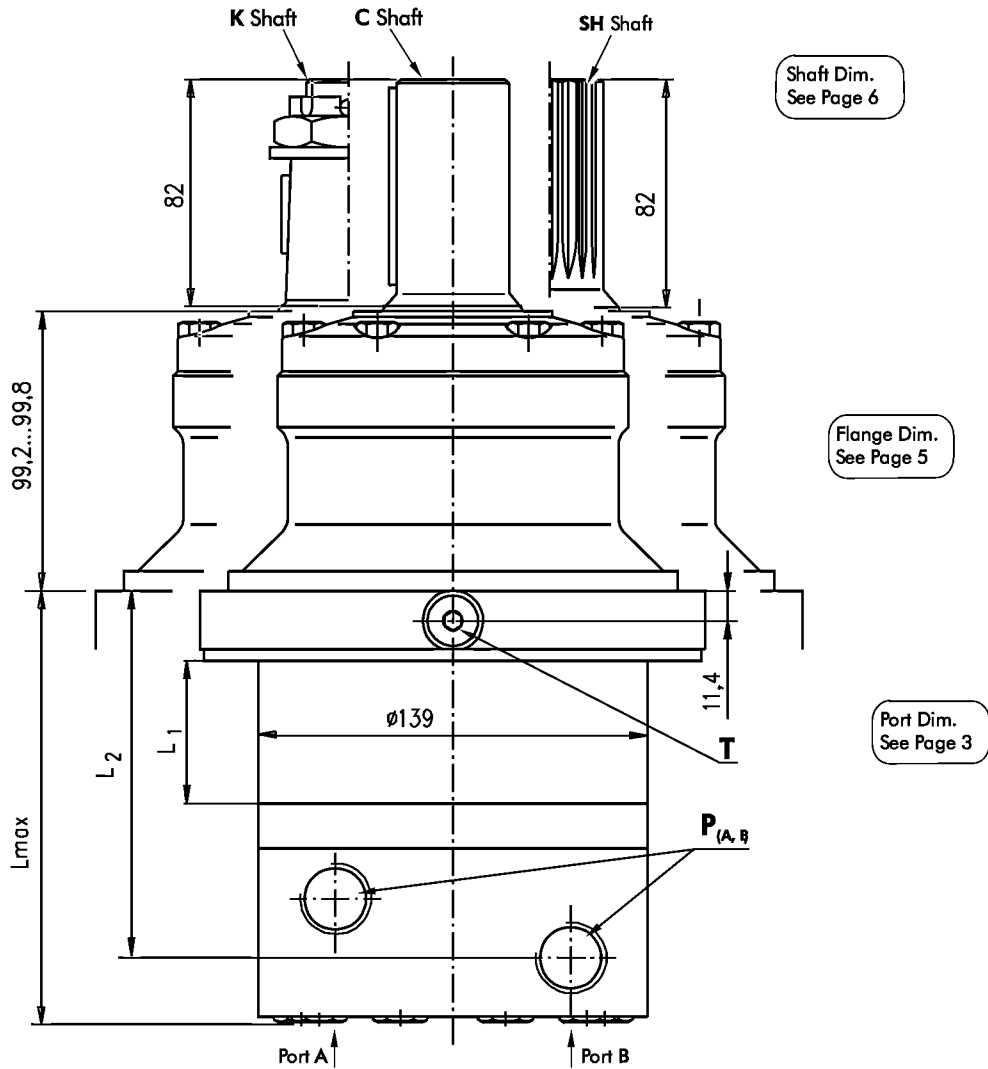

P_(A,B): 2xG3/4 - 17 mm depth
T : G1/4 - 12 mm depth (plugged)


Standard Rotation
 Viewed from Shaft End
 Port A Pressurized - CW
 Port B Pressurized - CCW

Reverse Rotation
 Viewed from Shaft End
 Port A Pressurized - CCW
 Port B Pressurized - CW

Type	Lmax, mm	L ₂ , mm	L ₁ , mm
OTMW 200	129	104,8	25
OTMW 250	135	112,1	31,3
OTMW 315	144	120,3	40,5
OTMW 400	155	130,8	51
OTMW 470	163	138,8	59
OTMW 500	169	144,8	65


DIMENSIONS OF MOUNTING FOR OTM

4-Bolt flange
spigot diameter $\varnothing 160$ mm - BC $\varnothing 200$ mm

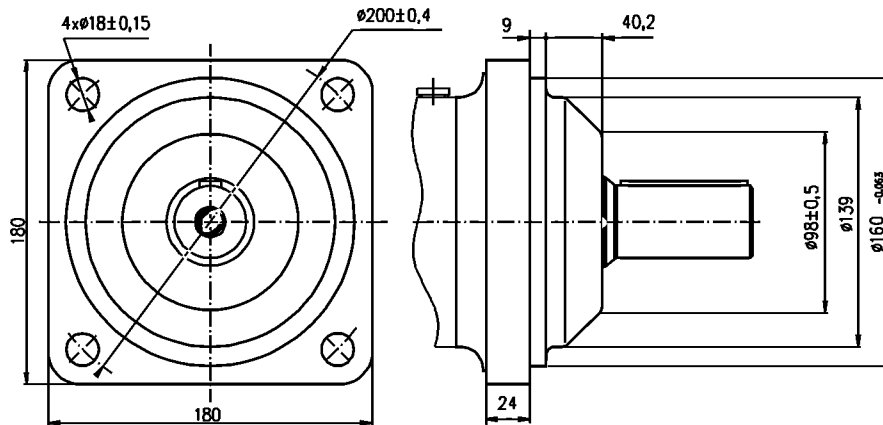


DIMENSIONS OF MOUNTING FOR OTM C

spigot diameter $\varnothing 125$ mm - BC $\varnothing 160$ mm 4-Bolt flange

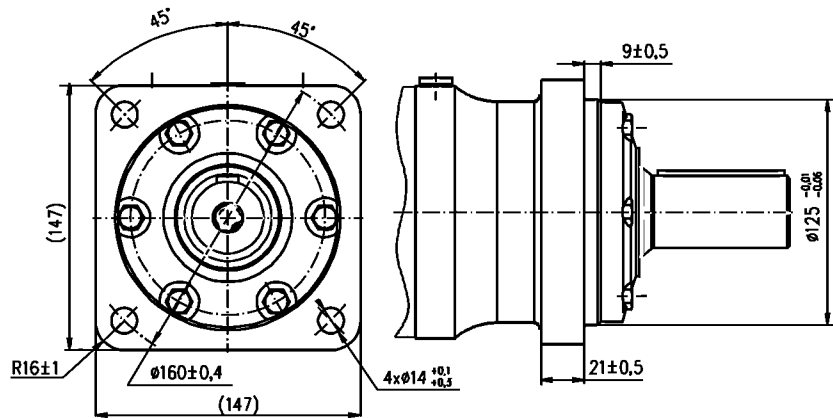


4-Bolt flange, Wheel Motor spigot diameter $\varnothing 160$ mm - BC $\varnothing 200$ mm

DIMENSIONS OF MOUNTING FOR OTM W

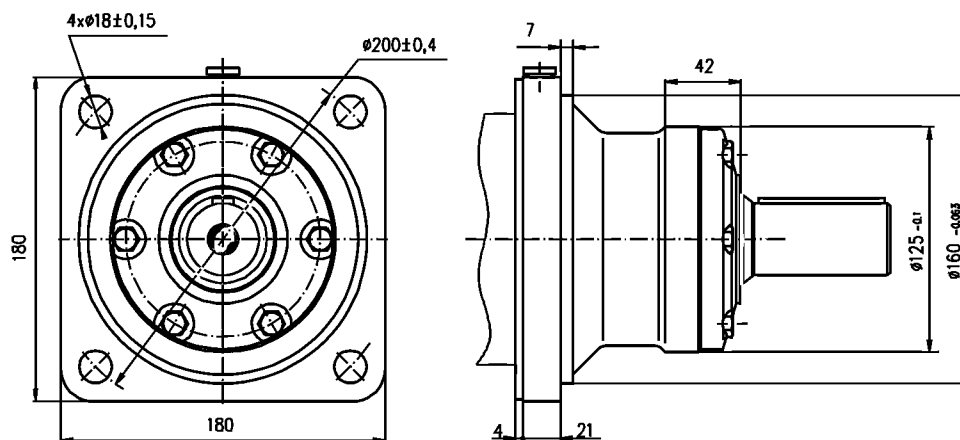


[SHAFT EXTENSIONS]


C - \varnothing 40 straight, Parallel key A12x8x70 DIN 6885
Max. Torque 132,8 daNm

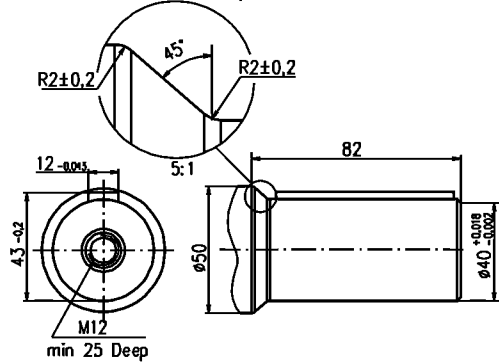

SH - \varnothing 1½" splined 17T, DP 12/24 ANSI B92.1-1976
Max. Torque 132,8 daNm



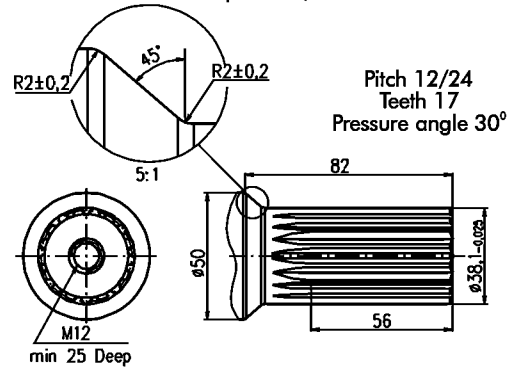


K -tapered 1:10, Parallel key B12x8x28 DIN 6885
Max. Torque 210,7 daNm

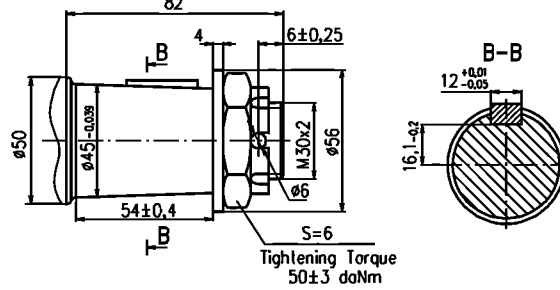


[PERMISSIBLE SHAFT LOADS]

The curves apply to a B10 bearing life (ISO281) of 2000 hours at 200 RPM.

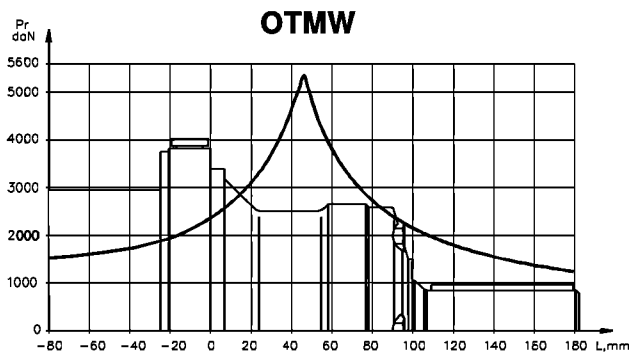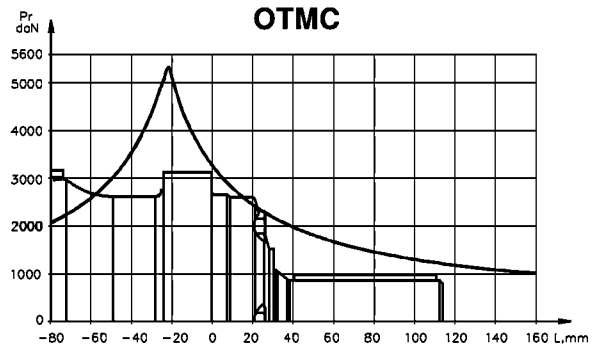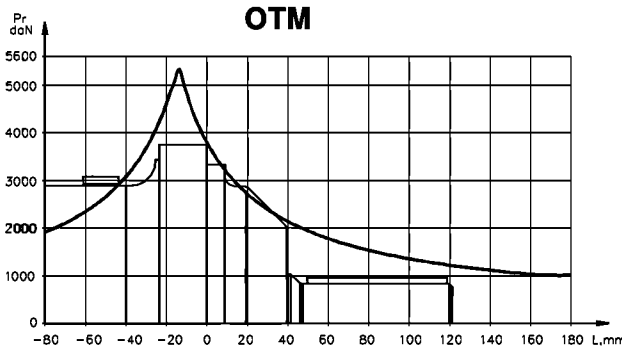

OUTLINE DIMENSIONS REFERENCE FOR OTMV

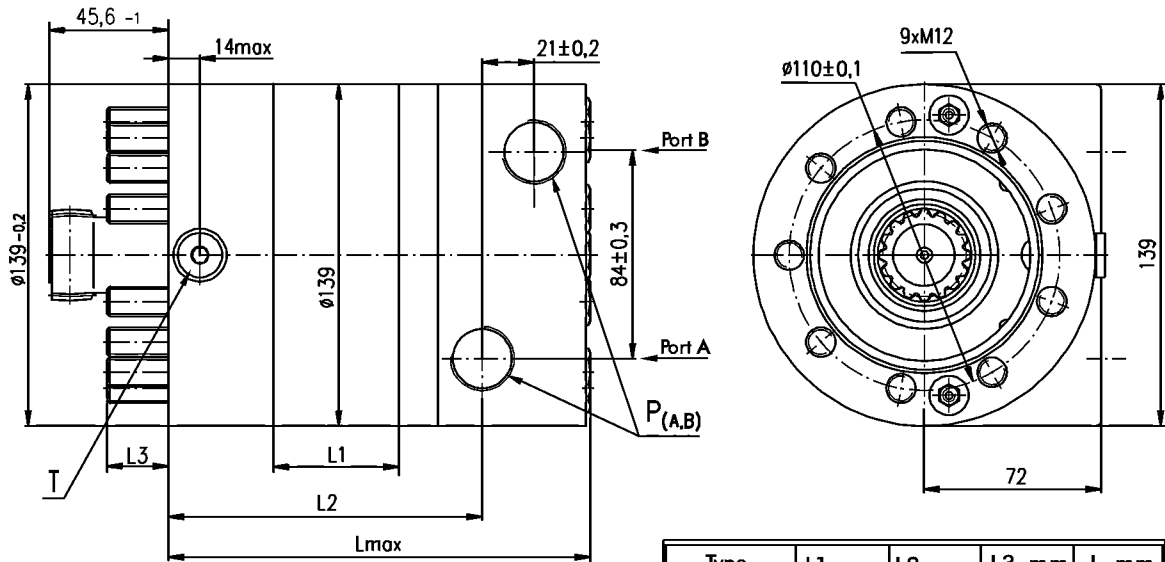


$P_{(A, B)}$: 2xG3/4 - 17 mm depth
T : G1/4 12 mm depth (plugged)

Standard Rotation Viewed from Shaft End Port A Pressurized - CW Port B Pressurized - CCW	Reverse Rotation Viewed from Shaft End Port A Pressurized - CCW Port B Pressurized - CW
--	---

Type	L1, mm	L2, mm	L3, mm	L, mm
OTMV 200	25	106,5	27,8	151
OTMV 350	31,3	112,8	26,5	157
OTMV 315	40,5	122	22,3	167
OTMV 400	51	132,5	21,8	177
OTMV 470	59	140,5	23,8	185
OTMV 500	65	146,5	27,8	191


DIMENSIONS OF THE ATTACHED COMPONENT FOR OTMV

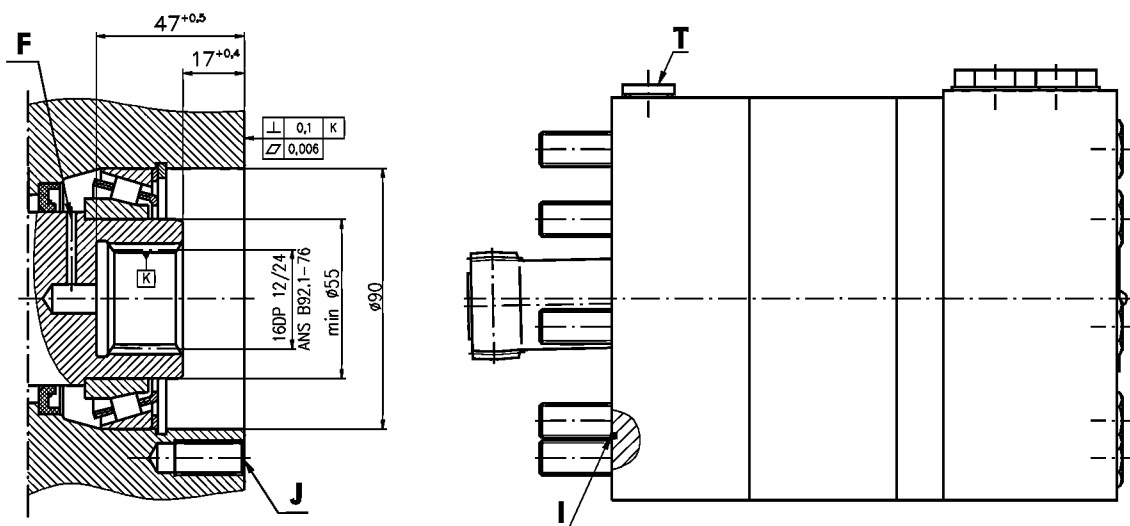

F: Oil circulation hole
J: 9xM12-30 mm depth, 40°, ø110±0,1

I: O- Ring 93x1,5mm
T: Drain connection G1/4

OUTLINE DIMENSIONS REFERENCE FOR OTM6V

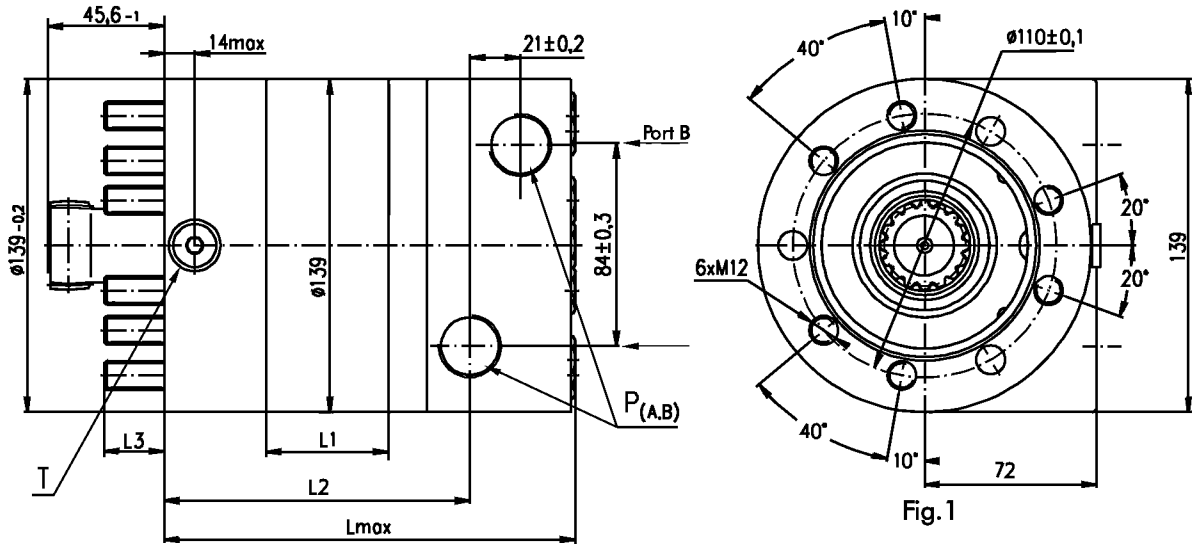


$P_{(A,B)}$: 2xG3/4 - 17 mm depth
T : G1/4 12 mm depth (plugged)

Standard Rotation Viewed from Shaft End Port A Pressurized - CW Port B Pressurized - CCW	Reverse Rotation Viewed from Shaft End Port A Pressurized - CCW Port B Pressurized - CW
--	---

Type	L1, mm	L2, mm	L3, mm	L, mm
OTM6V 200	25	106,5	27,8	151
OTM6V 350	31,3	112,8	26,5	157
OTM6V 315	40,5	122	22,3	167
OTM6V 400	51	132,5	21,8	177
OTM6V 470	59	140,5	23,8	185
OTM6V 500	65	146,5	27,8	191

DIMENSIONS OF THE ATTACHED COMPONENT FOR OTM6V

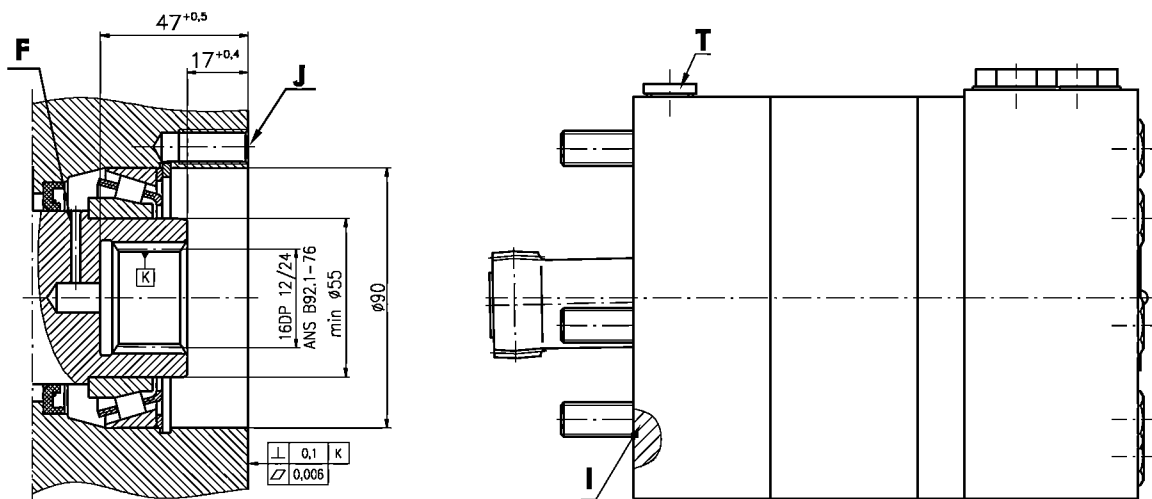

F: Oil circulation hole
J: 9xM12-30 mm depth, 40°, $\varnothing 110 \pm 0,1$
 or 6xM12-30 mm depth, situated in accordance with the bolts M12, shown on Fig.1, $\varnothing 110 \pm 0,1$

I: O- Ring 93x1,5mm
T: Drain connection G1/4

DRAIN CONNECTION


A drain line ought to be used when pressure in the return line can exceed the permissible pressure. It can be connected at the drain connection of the attached component. The maximum pressure in the drain line is limited by the attached component and its shaft seal.

The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

[INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT]

Standard ANS B92.1-1976, class 5
[$m=2.1166$; corrected $x.m=+1,0$]

Fillet Root Side Fit		mm
Number of Teeth	z	16
Pitch DP		12/24
Pressure Angle		30°
Pitch Dia.	D	33,8656
Major Dia.	D _{ri}	38,4 ^{+0,4}
Minor Dia.	D _i	32,15 ^{+0,04}
Space Width [Circular]	L _o	4,516±0,037
Fillet Radius	R	0,5
Max. Measurement between Pin	L	26,9 ^{+0,10}
Pin Dia.	d	4,835±0,001

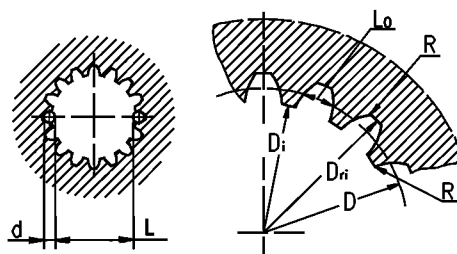

Hardening Specification:
 on the surface HV=750±50
 0,7±0,2 mm under the surface HV=560
 Material 20 MoCr4 DIN 17210 or better

[ORDER CODE]

	1	2	3	4	5	6	7	8
OTM								

Pos.1 - Mounting Flange

- omit - 4-Bolt flange, spigot dia. ø160, BC ø200
- C** - 4-Bolt flange, spigot dia. ø125, BC ø160
- W** - Wheel motor
- V** - Veryshort mount, 9xM12 mounting bolts
- 6V** - Veryshort mount, 6xM12 mounting bolts

Pos.2 - Displacement code

- 200** - 201,4[cm³/rev]
- 250** - 251,8[cm³/rev]
- 315** - 326,3[cm³/rev]
- 400** - 410,9[cm³/rev]
- 470** - 475,0[cm³/rev]
- 500** - 523,6[cm³/rev]

Pos.3 - Shaft Extensions*

- C** - ø40 straight, Parallel key A12x8x70 DIN6885
- K** - ø45 tapered 1:10, Parallel key B12x8x28 DIN6885
- SH** - ø1½" splined 17T ANSI B92.1-1976

Pos. 4 - Ports

- omit - BSPP (ISO 228)

Pos. 5 - Special Features

- omit - none
- LL** - Low Leakage
- LSV** - Low Speed Valve

Pos. 6 - Rotation

- omit - Standard Rotation
- R** - Reverse Rotation

Pos. 7 - Option (Paint)**

- omit - no Paint
- P** - Painted
- PC** - Corrosion Protected Paint

Pos. 8 - Design Series

- omit - Factory specified

NOTES:


* The permissible output torque for shafts must be not exceeded!

** Color at customer's request.

The hydraulic motors are mangano-phosphatized as standard.




HYDRAULIC MOTORS OV



APPLICATION

- » Conveyors;
- » Metal working machines;
- » Machines for agriculture;
- » Road building machines;
- » Mining machinery;
- » Food industries;
- » Special vehicles;
- » Plastic and rubber machinery etc.



CONTENTS

Specification data	OV-02
Function diagrams	OV-03+05
Permissible shaft loads	OV-05
Dimensions and mounting	OV-06
Dimensions and mounting- OVS	OV-06+08
Internal Spline data	OV-08
Tacho connection	OV-08
Shaft extensions	OV-11
Order code	OV-11

OPTIONS

- » Model- Disc valve, roll-gerotor
- » Flange and wheel mount;
- » Short motor;
- » Tacho and speed sensor connection;
- » Side ports;
- » Shafts- straight, splined and tapered;
- » Metric and BSPP ports;
- » Other special features.


GENERAL

Displacement, [cm ³ /rev.]	314,5÷801,8
Max. Speed, [RPM]	510÷250
Max. Torque, [daNm]	92÷188
Max. Output, [kW]	42,5÷53,5
Max. Pressure Drop, [bar]	200÷160
Max. Oil Flow, [l/min]	160÷200
Min. Speed, [RPM]	10÷5
Permissible Shaft Loads, [daN]	$P_{rad}=2800; P_a=1500$
Pressure fluid	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range, [°C]	-30÷90
Optimal Viscosity range, [mm ² /s]	20÷75
Filtration	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

Oil flow in drain line

Pressure Losses

Pressure drop (bar)	Viscosity (mm ² /s)	Oil flow in drain line (l/min)
140	20	3
	35	2
210	20	6
	35	4

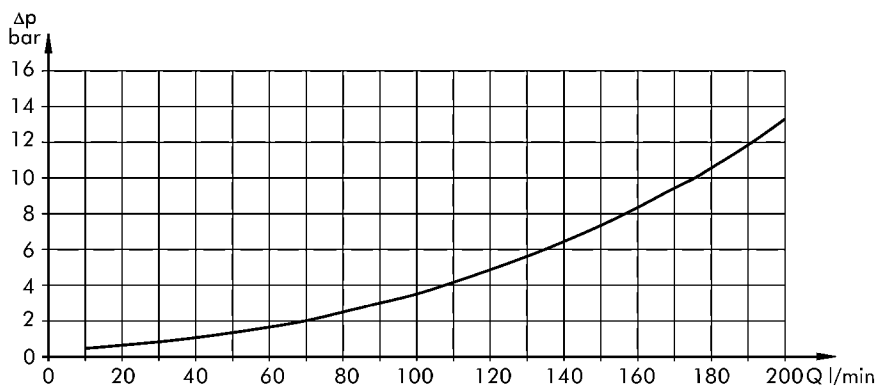

SPECIFICATION DATA

Type	OV 315	OV 400	OV 500	OV 630	OV 800	
Displacement [cm³/rev.]	314,5	400,9	499,6	629,1	801,8	
Max. Speed, [RPM]	cont.	510	500	400	315	250
	Int.*	630	600	480	380	300
Max. Torque [daNm]	cont.	92	118	146	166	188
	Int.*	111	141	176	194	211
	peak**	129	164	205	221	247
Max. Output [kW]	cont.	42,5	53,5	53,5	48	42,5
	int.*	51	64	64	56	48
Max. Pressure Drop [bar]	cont.	200	200	200	180	160
	Int.*	240	240	240	210	180
	peak**	280	280	280	240	210
Max. Oil Flow [l/min]	cont.	160	200	200	200	200
	Int.*	200	240	240	240	240
Max. Inlet Pressure [bar]	cont.	210	210	210	210	210
	Int.*	250	250	250	250	250
	peak**	300	300	300	300	300
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line, [bar]	cont. 0-100 RPM	60	60	60	60	60
	cont. 100-300 RPM	30	30	30	30	30
	cont. >300 RPM	20	20	20	20	20
	Int.* 0-max. RPM	75	75	75	75	75
Max. Return Pressure with Drain Line [bar]	cont.	140	140	140	140	140
	Int.*	175	175	175	175	175
	peak**	210	210	210	210	210
Max. Starting Pressure with Unloaded Shaft, [bar]		8	8	8	8	8
Min. Starting Torque [daNm]	at max. press. drop cont.	71	91	113	133	151
	at max. press. drop Int.*	85	109	136	155	170
Min. Speed***, [RPM]		10	9	8	6	5
Weight, [kg]	OV	31,8	32,6	33,5	34,9	36,5
	OVW	32,4	33,2	34,1	35,5	37,1
	OVS	22,7	23,5	24,4	25,6	27,7

* Intermittent operation: the permissible values may occur for max. 10% of every minute.


** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 5 RPM lower than given, consult factory or your regional manager.


- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil, HLP(DIN51524) or HM(ISO6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 13 mm²/s at 50°C.
- 5) Recommended maximum system operating temperature is 82°C.
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

FUNCTION DIAGRAMS

OV 315

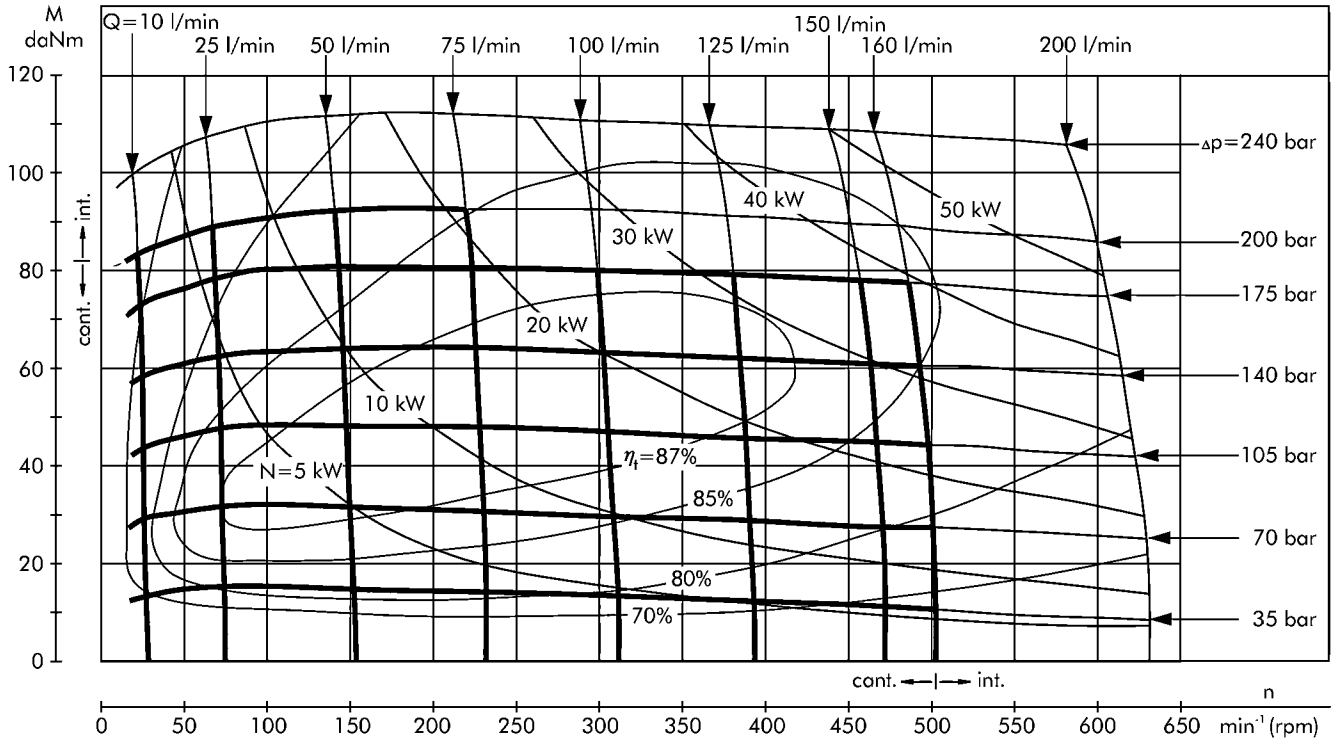


OV 400

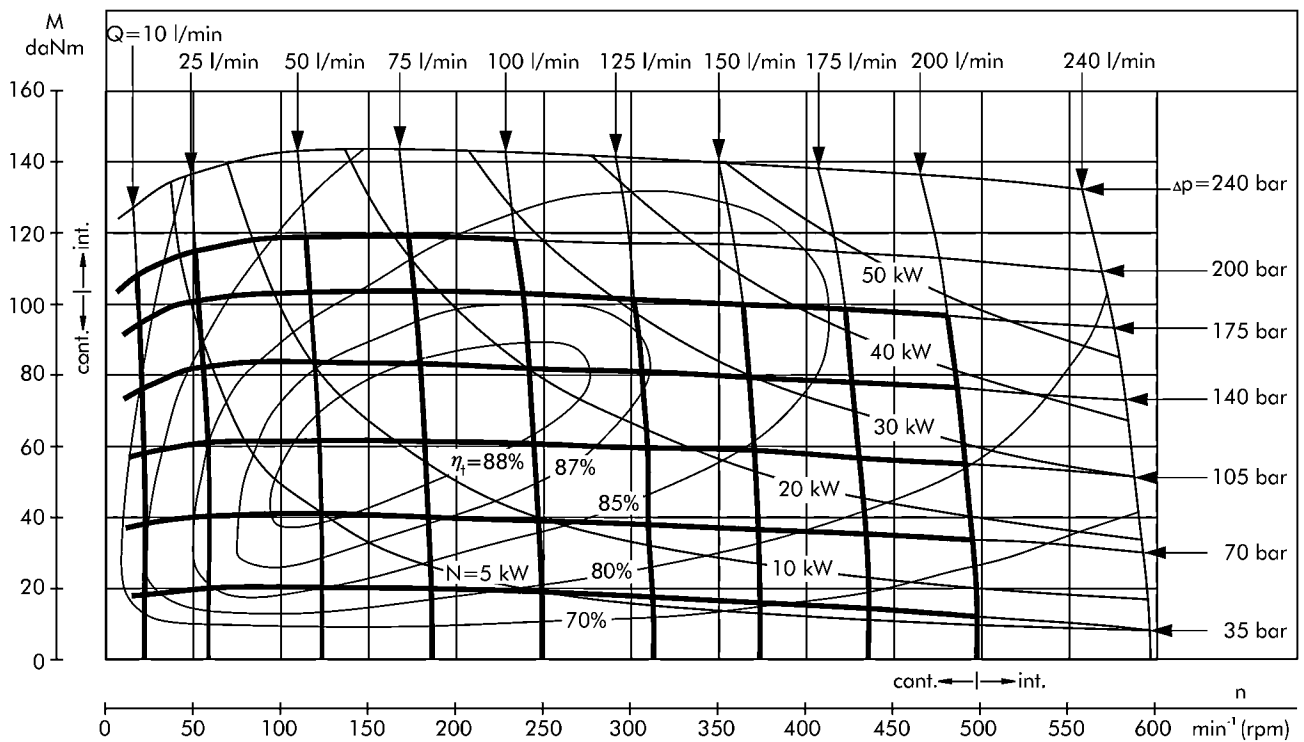


The function diagrams data was collected at back pressure 5±10 bar and oil with viscosity of 32 mm²/s at 50° C.

FUNCTION DIAGRAMS

OV 500

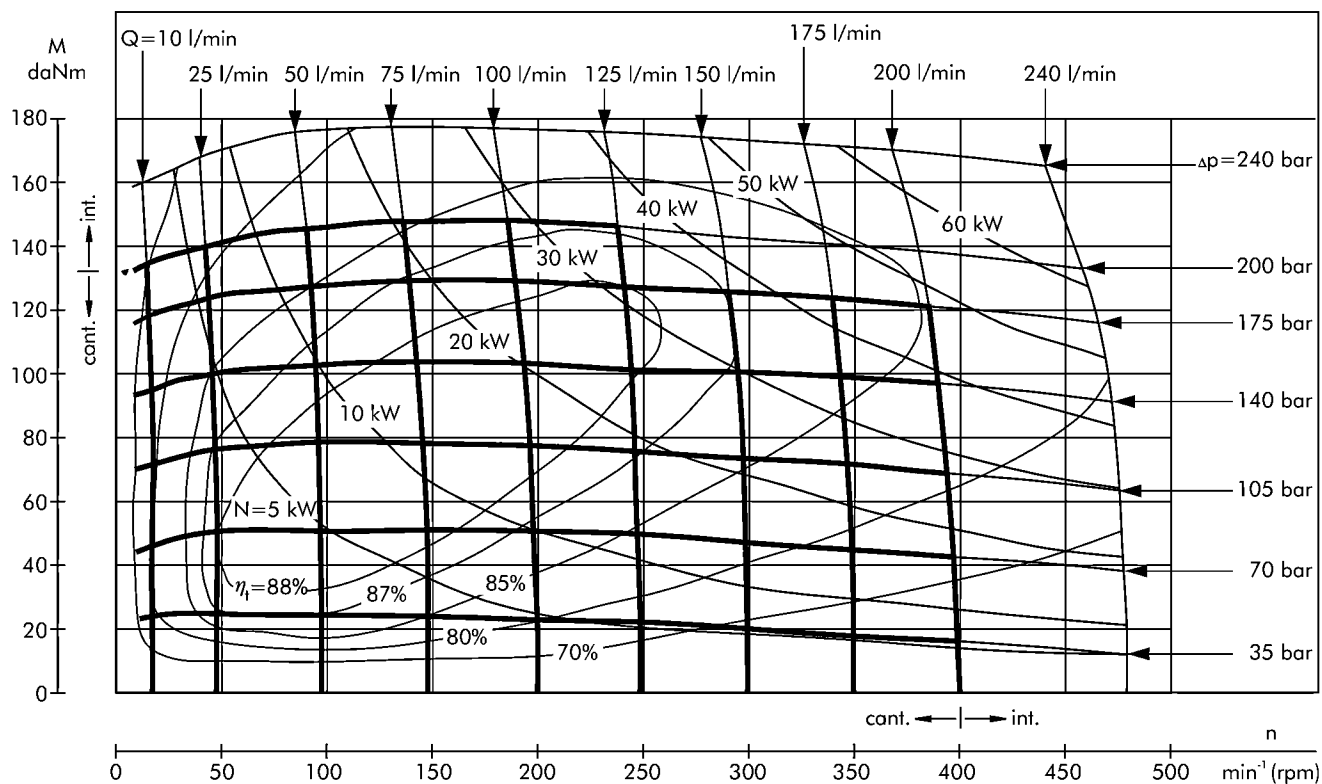


OV 630

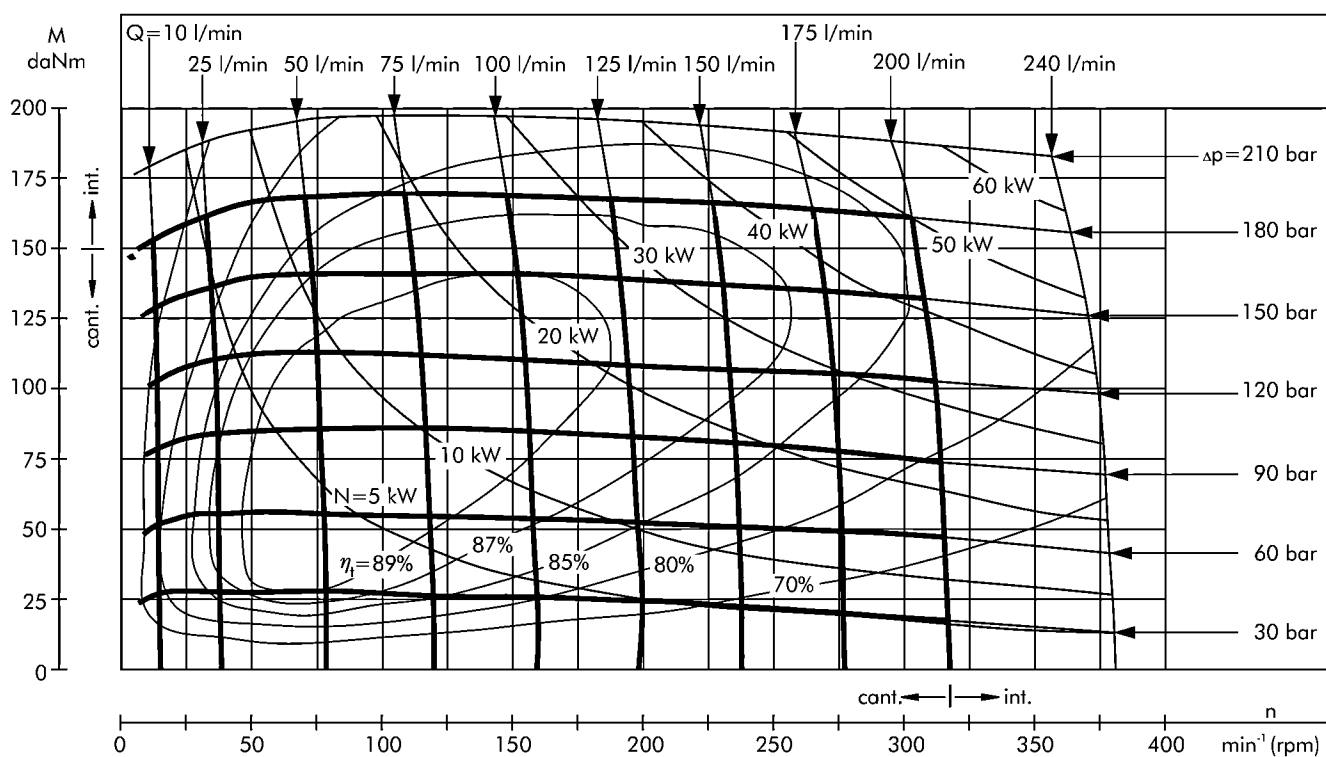

The function diagrams data was collected at back pressure 5±10 bar and oil with viscosity of 32 mm²/s at 50° C.


FUNCTION DIAGRAMS

OV 800

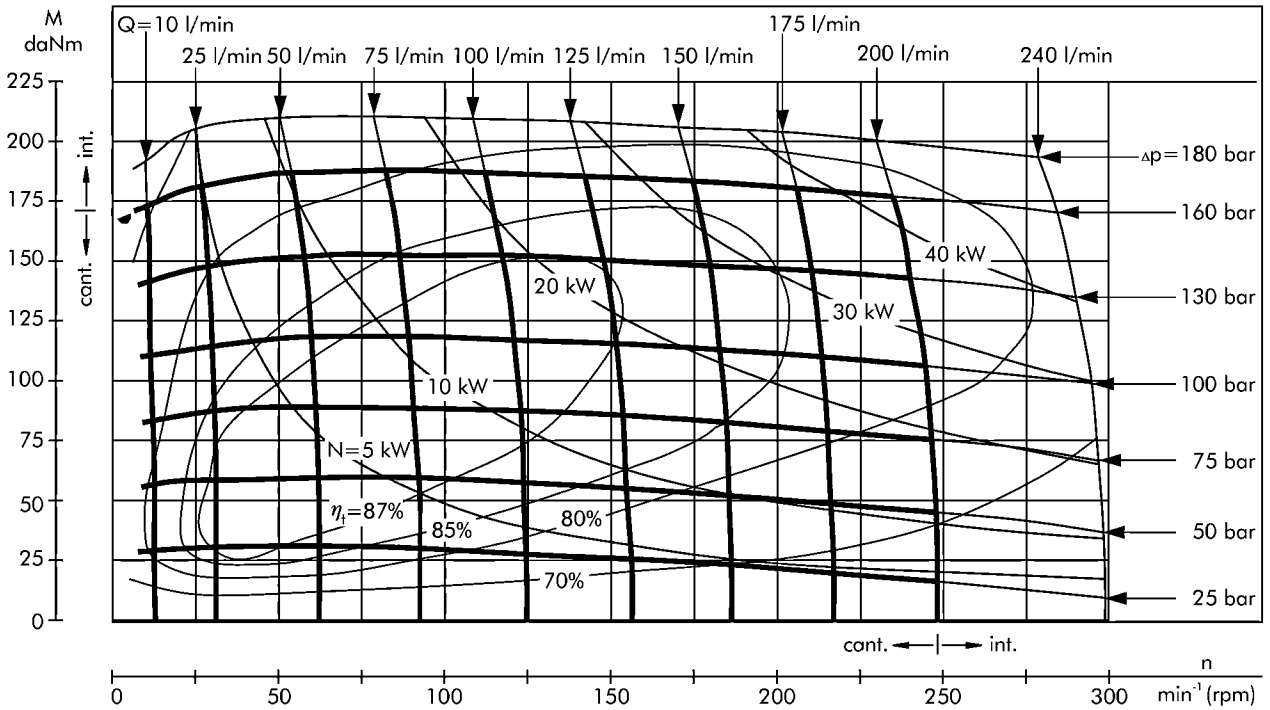


The function diagrams data was collected at back pressure 5 ± 10 bar and oil with viscosity of $32 \text{ mm}^2/\text{s}$ at 50°C .

PERMISSIBLE SHAFT LOADS

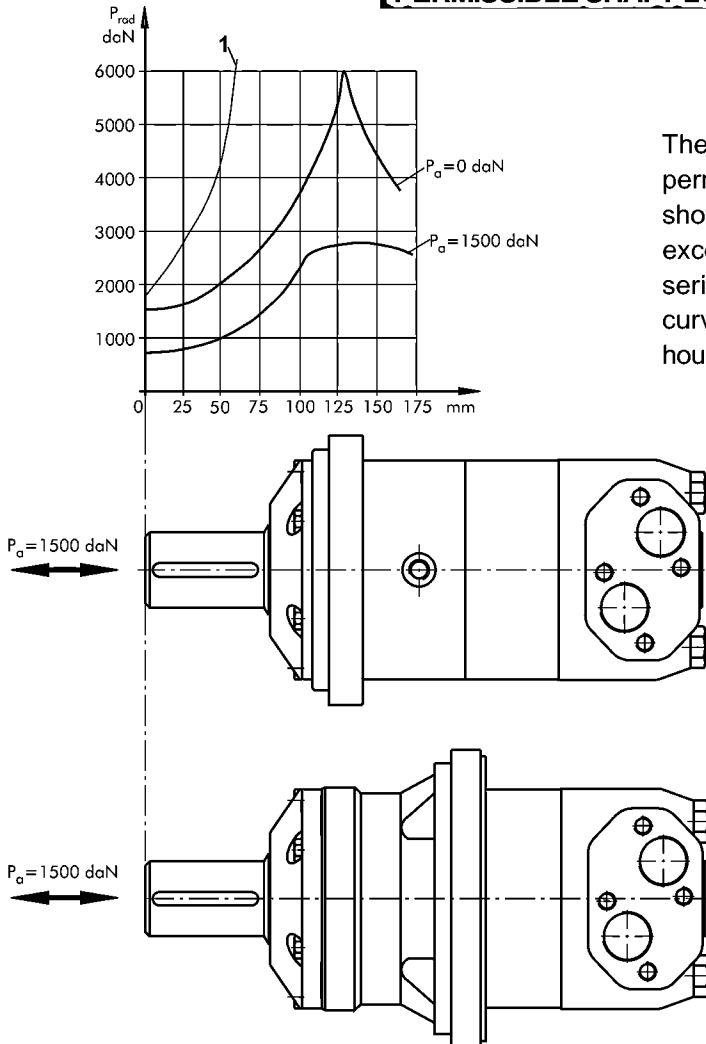


The output shaft runs in tapered bearings that permit high axial and radial forces. Curve "1" shows max. radial shaft load. Any shaft load exceeding the values quoted in the curve will seriously reduce motor life. The two other curves apply to a B10 bearing life of 3000 hours at 200 RPM.

DIMENSIONS AND MOUNTING DATA

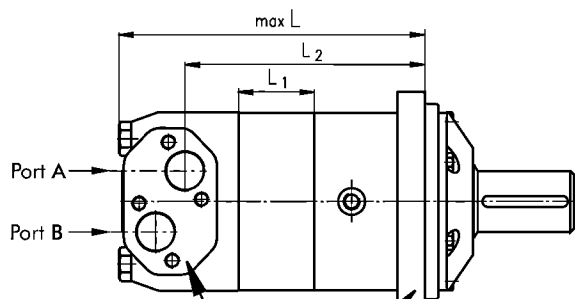


Porting



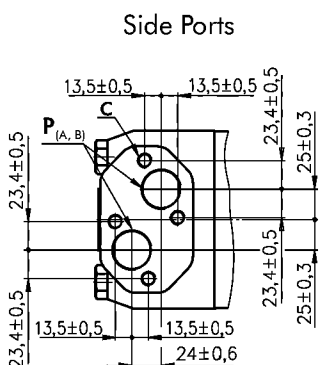


Mounting

Square Mount (4 Holes)

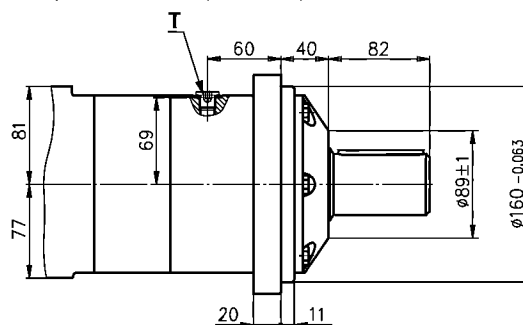

W Wheel Mount

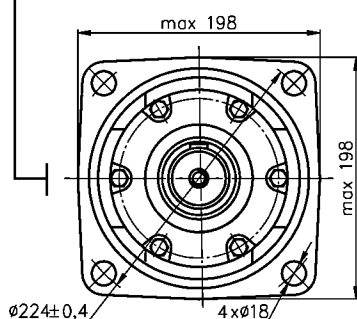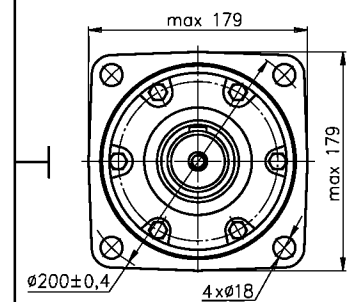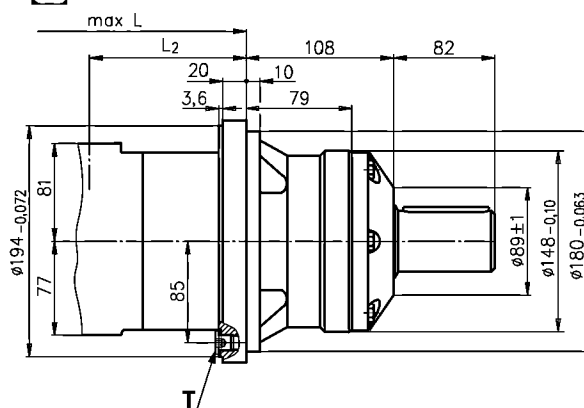

Standard Rotation

Viewed from Shaft End
 Port A Pressurized - CW
 Port B Pressurized - CCW

Reverse Rotation

Viewed from Shaft End
 Port A Pressurized - CCW
 Port B Pressurized - CW

C: 4xM12- 12 mm depth

P_(A,B): 2xG1 - 20 mm depth



T: G 1/4 - 12 mm depth

Type	L, mm	L ₂ , mm	Type	L, mm	L ₂ , mm	*L ₁ , mm
OV 315	214,5	160	OVW 315	146	92	22,0
OV 400	221,5	167	OVW 400	153	99	29,0
OV 500	229,5	175	OVW 500	161	107	37,0
OV 630	240,0	186	OVW 630	172	118	47,5
OV 800	254,0	200	OVW 800	185	132	61,5

* The width of the gerolor is 3,5 mm greater than L₁.


DIMENSIONS AND MOUNTING

S Short Mount

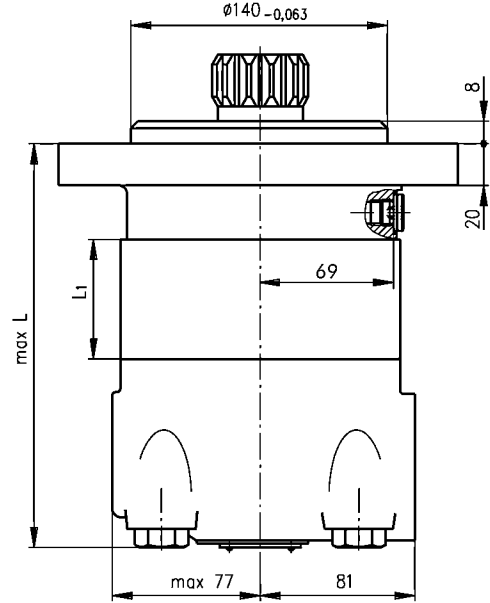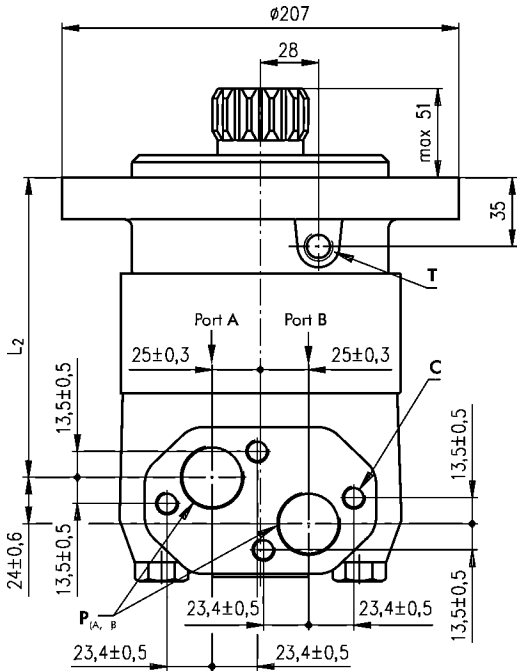

Type	L ₁ , mm	*L ₁ , mm	L ₂ , mm
OVS 315	171	22,0	117
OVS 400	179	29,0	124
OVS 500	186	37,0	132
OVS 630	197	47,5	143
OVS 800	211	61,5	157

C: 4xM12- 12 mm depth
P_(A,B): 2xG1 - 20 mm depth
T: G 1/4 - 12 mm depth

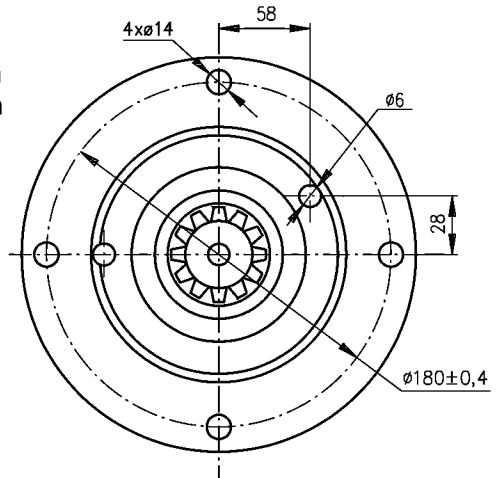

* The width of the gerotor is 3,5 mm greater than L₁.

Standard Rotation


Viewed from Shaft End
 Port A Pressurized - CW
 Port B Pressurized - CCW

Reverse Rotation


Viewed from Shaft End
 Port A Pressurized - CCW
 Port B Pressurized - CW

DIMENSIONS OF THE ATTACHED COMPONENT

OVS

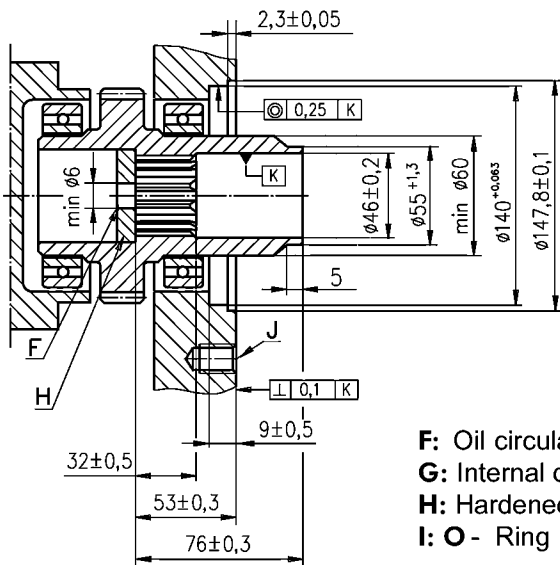

F: Oil circulation hole
G: Internal drain channel
H: Hardened stop plate
I: O - Ring 140x3mm

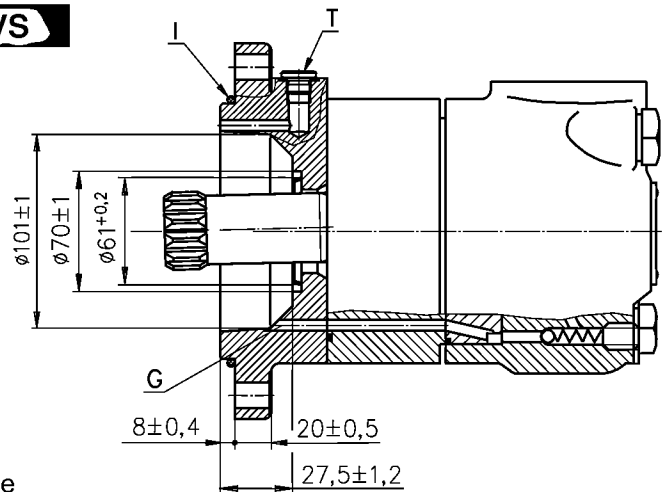

J: 4xM12-18 mm depth, 90°
T: Drain connection G1/4 - 12 mm depth

DRAIN CONNECTION


A drain line ought to be used when pressure in the return line can exceed the permissible pressure. It can be connected for OVS at the drain port of the motor.

The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT

Standard ANSI B92.1-1976, class 5
 [m=2.54; corrected x.m=+1,0]

Fillet Root Side Fit		mm
Number of Teeth	z	16
Diametral Pitch	DP	10/20
Pressure Angle		30°
Pitch Dia.	D	40,640
Major Dia.	D _{ri}	45,2 ^{+0,4}
Minor Dia.	D _i	38,5 ^{+0,039}
Space Width [Circular]	L _a	5,18±0,037
Fillet Radius	R _{min}	0,4
Max. Measurement between Pin	L	32,47 ^{+0,15}
Pin Dia.	d	5,5±0,001

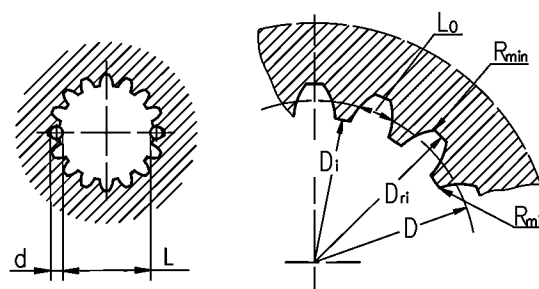

Hardening Specification:


HRC 60±2

HRC 52

0,7±0,2 mm effective case depth

Material 20 MoCr4 DIN 17210 or better


MOTORS WITH TACHO CONNECTION - Option "T"

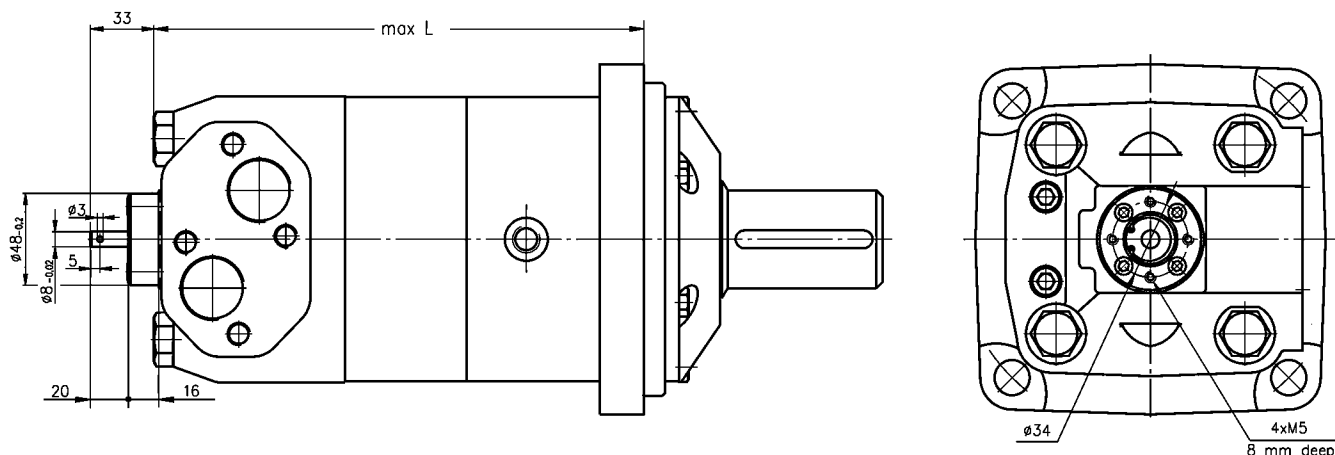

Hydraulic motors with speed sensor type OV...RS

MetaHydraulic is introducing hydraulic motor with a new generation of speed sensor. The electric output signal is a standard voltage signal that can be used for regulating the speed of a motor.

The speed is measured by a sensor in accordance with the Hall principle. Signal processing and amplification are performed in the sensor housing. A connection is provided in the housing by a Plug connector M12 Series.

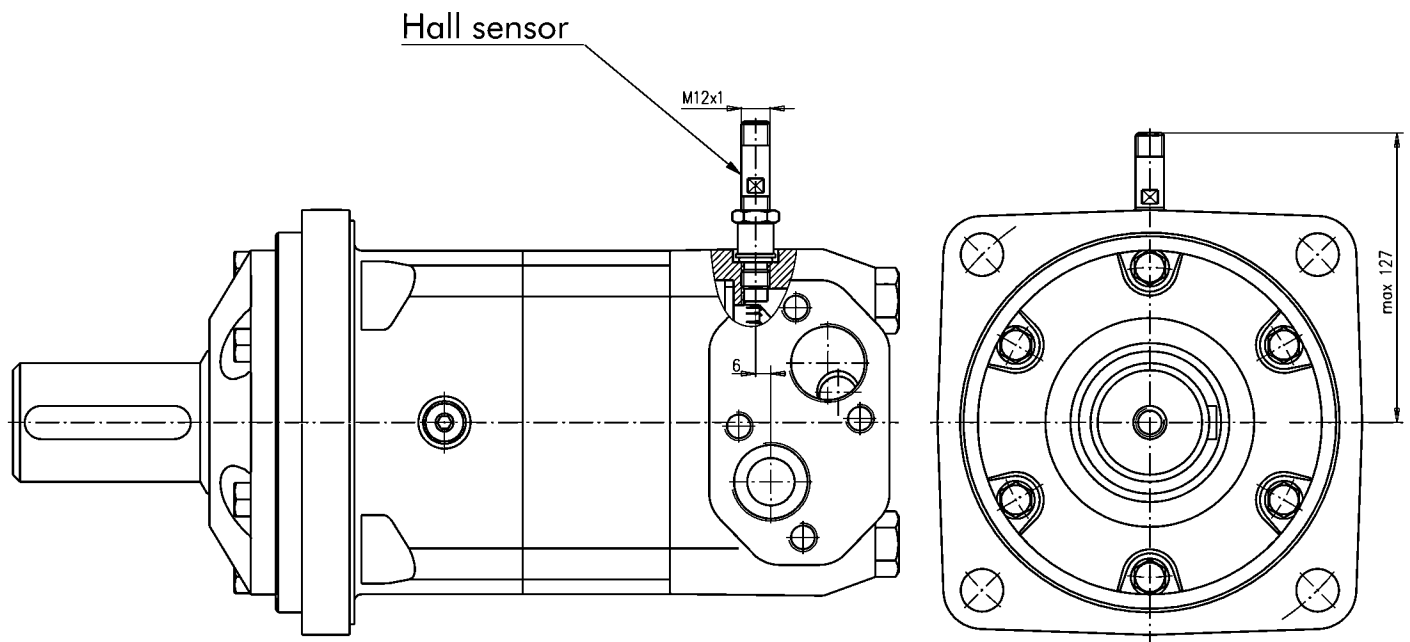


This performance is applicable for all motors of OV series. The main technical features correspond to the standard motors series OV.

DIFFERENTIAL HALL SENSOR

Technical data

Frequency range	3...20 000 Hz
Output	PNP
Power supply	10...36 VDC
Current input	20 mA (@24 VDC)
Current load	500 mA (@24 VDC; 24°C)
Ambient Temperature	minus 40... plus 125°C
Protection	IP 67
Plug connector	M12-Series
Mounting principle	ISO 6149
Pulses per revolution	102


Output signal

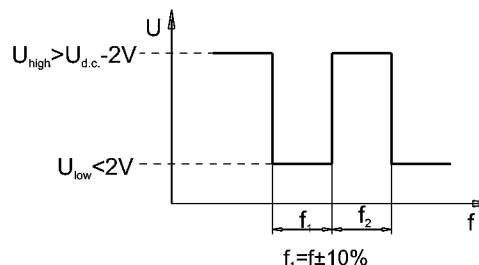


Load max.: $I_{high} = I_{low} < 50\text{mA}$
 No load current, max: 20 mA

Wiring diagram


PNP

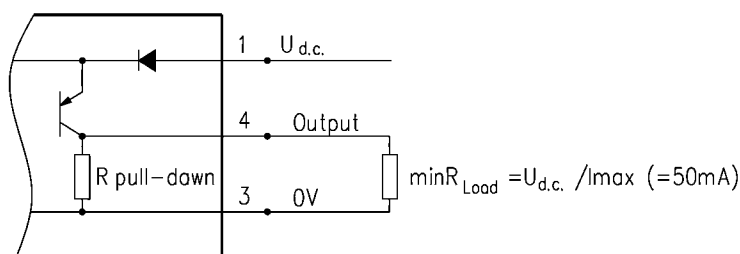

NPN

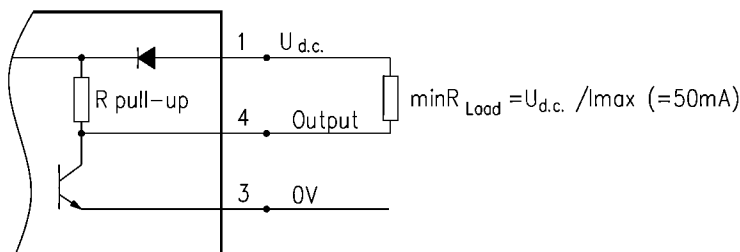


Stik type




Terminal No.	Connection
1	$U_{d.c.}$
2	No connection
3	0V
4	Output signal

SHAFT EXTENSIONS


C - $\varnothing 50$ straight, Parallel key A14x9x70 DIN 6885

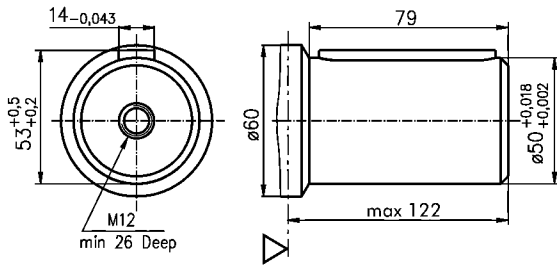


CO - $\varnothing 2\frac{1}{4}$ [57,15] straight, Parallel key $\frac{1}{2}$ "x $\frac{1}{2}$ "x $2\frac{1}{4}$ " BS46

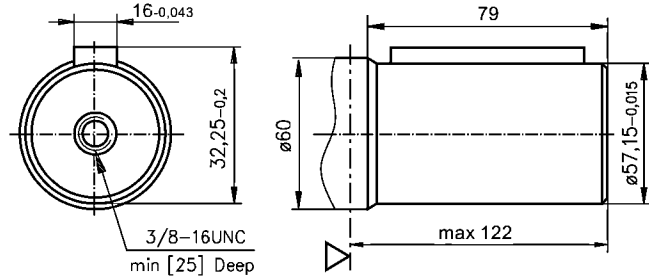

SH - $\varnothing 2\frac{1}{8}$ " splined, 16 DP 8/16 ANSI B92.1-1976

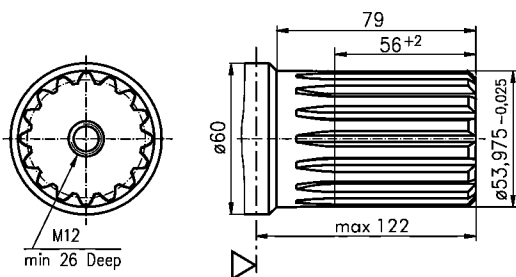

K - tapered 1:10, Parallel key B16x10x32 DIN 6885

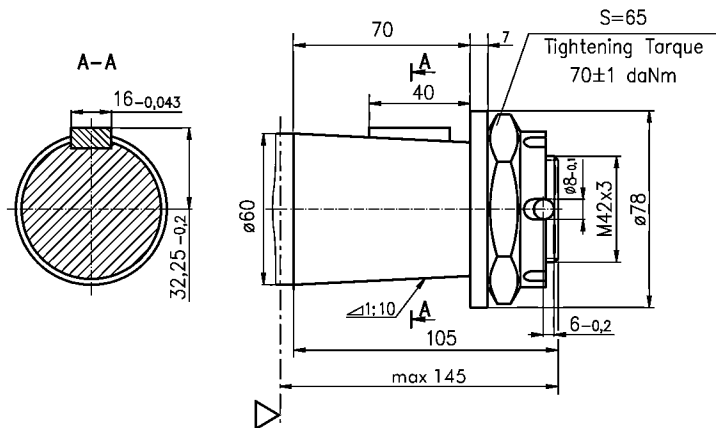

▽ - Motor Mounting Surface

ORDER CODE

1	2	3	4	5	6	7	8
O	V						

Pos.1 - Mounting Flange

omit - Square mount, four holes

S - Short mount

W* - Wheel mount

Pos.2 - Displacement code

315 - 314,5 [cm³/rev]

400 - 400,9 [cm³/rev]

500 - 499,6 [cm³/rev]

630 - 629,1 [cm³/rev]

800 - 801,8 [cm³/rev]

Pos.3 - Shaft extensions**

C - $\varnothing 50$ straight, Parallel key A14x9x70 DIN6885

CO - $\varnothing 2\frac{1}{4}$ straight, Parallel key $\frac{1}{2}$ "x $\frac{1}{2}$ "x $2\frac{1}{4}$ " BS46

K - $\varnothing 60$ tapered 1:10, Parallel key B16x10x32 DIN6885

SH - $\varnothing 2\frac{1}{8}$ " splined, ANSI B92.1-1976

Pos.4 - Speed Monitoring

omit - none

T - with tacho connection

RS-P - with speed sensor (PNP pull-down resistor)

RS-N - with speed sensor (NPN pull-up resistor)

Pos.5 - Special Features

omit - none

LL - Low Leakage

LSV - Low Speed Valve

Pos.6 - Rotation

omit - Standard Rotation

R - Reverse Rotation

Pos.7 - Option (Paint)***

omit - no Paint

P - Painted

PC - Corrosion Protected Paint

Pos.8 - Design Series

omit - Factory specified

NOTES:

* The motor type OVW is only available with shaft type **C**, **CO**, **K**

** The permissible output torque for shafts must be not exceeded!


*** Color at customer's request.

The hydraulic motors are mangano- phosphatized as standard.

Hydraulic motors with Dual shaft type ORB160

INTRODUCTION

Meta Hydraulic introduces a new series of hydraulic motors, type ORB with two shafts, which are based on well-known OR motors.



OPTIONS

- » Model-Spool valve, roll-gerotor;
- » Dual shaft;
- » Oval flange;
- » Side port;
- » Straight shafts;
- » BSPP ports;
- » Other special features




APPLICATION

- » Conveyors;
- » Feeding mechanism of robots and manipulators;
- » Metal working machines;
- » Textile machines;
- » Machines for agriculture;
- » Food industries;
- » Mining machinery, etc.

SPECIFICATION DATA

Type	ORB 160	ORB 160 LSV
Displacement, cm³/rev.	159,6	159,6
Max. Speed, RPM	cont. 375	200
	int. 470	300
Max. Torque, daNm	cont. 29	29
	int. 35	35
Max. Torque "A"Shaft, daNm	cont. 20	20
	int. 23	23
Max. Torque "B"Shaft, daNm	cont. 20	20
	int. 23	23
Max. Pressure Drop, bar	cont. 150	150
	int. 190	190
Max. Oil Flow, lpm	cont. 60	32
	int. 75	48
Max. Return Pressure without Drain Line, bar	cont. 0 - 100 RPM	75
	cont. 100-200 RPM	40
	cont. 200-500 RPM	20
	int. 0 - max RPM	75


OUTLINE DIMENSINS REFERENCE

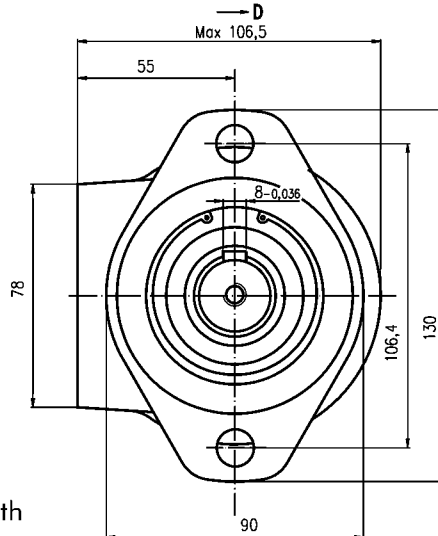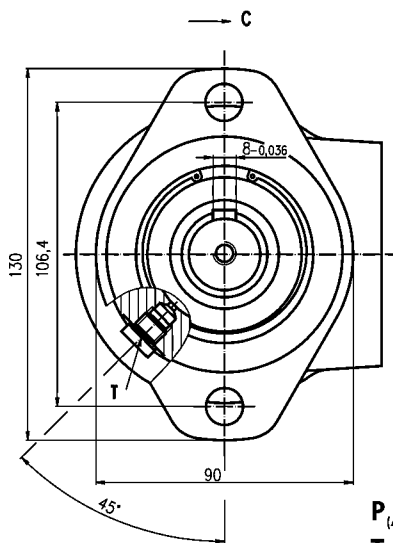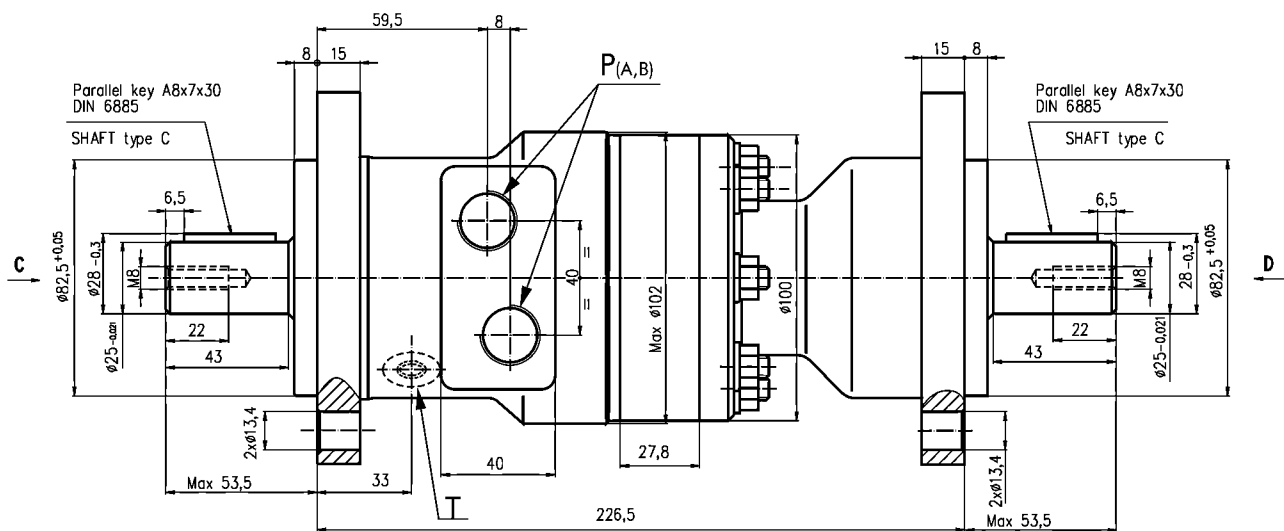


P_(A, B): 2xG1/2 - 18 mm depth
T : G1/8 - 9 mm depth (plugged)

PERMISSIBLE SHAFT LOADS

The load diagrams are valid for an average bearings life of 1600 hrs at 200 r.p.m. with mineral base lubricating containing antiwear additives (ref. ISO 281 (3.3) standard).
 The "A" curve gives the maximum static load affordable by the bearings.
 The "B" curve gives the radial load top limit without axial load of 200 daN.

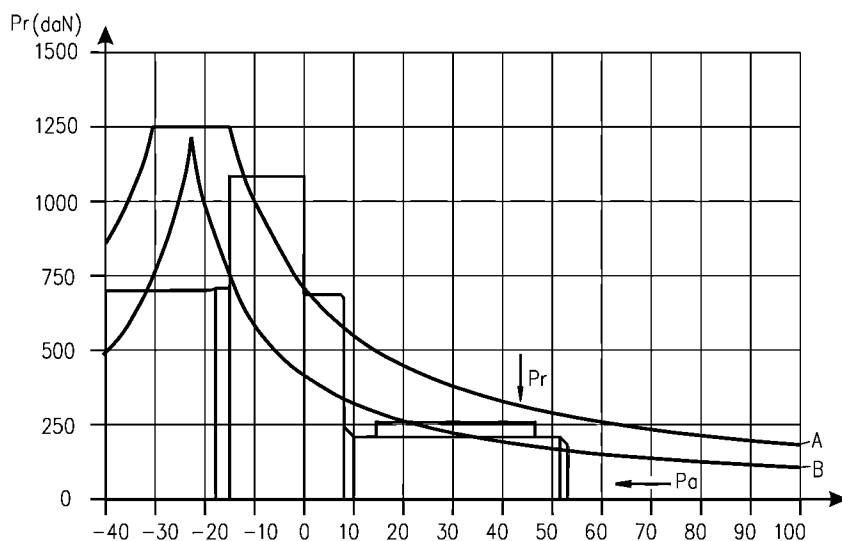


HYDRAULIC MOTOR-BRAKE ORBR



APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Machines for agriculture
- » Food industries
- » Mining machinery etc.



CONTENTS

Specification data	49÷50
Dimensions and mounting	51
Shaft extensions	51
Permissible shaft loads	52
Permissible shaft Seal Pressure ...	52
Order code	52

OPTIONS

- » Model- Spool valve, roll-gerotor;
- » Fully integrated friction disk brake;
- » Side port;
- » Shaft - straight;
- » BSPP ports.


GENERAL

Displacement, [cm ³ /rev.]	80,3 ÷ 397
Max. Speed, [RPM]	150 ÷ 500
Max. Torque, [daNm]	19,5 ÷ 55
Max. Output, [kW]	2,2 ÷ 16
Max. Pressure Drop, [bar]	45 ÷ 175
Max. Oil Flow, [l/min]	40 ÷ 60
Min. Speed, [RPM]	10
Permissible Shaft Loads, [daN]	P _a = 200
Pressure fluid	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range, [°C]	-30 ÷ 90
Optimal Viscosity range, [mm ² /s]	20 ÷ 75
Filtration	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

Oil flow in drain line

Pressure drop (bar)	Viscosity (mm ² /s)	Oil flow in drain line (l/min)
100	20	2,5
	35	1,8
140	20	3,5
	35	2,8

Pressure Losses

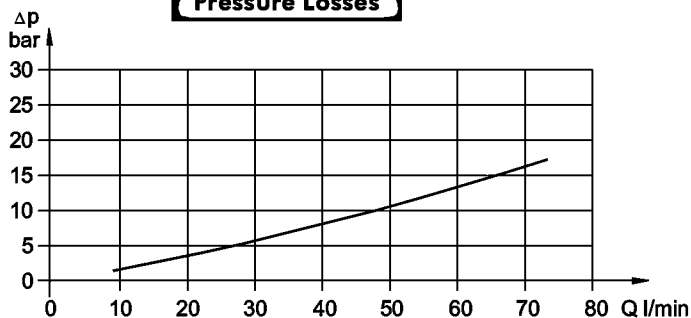



SPECIFICATION DATA

Type	ORBR 80	ORBR 100	ORBR 125	ORBR 160 C	ORBR 160 CB	ORBR 200 C	ORBR 200 CB	
Displacement, cm. ³ /rev.	80,3	99,8	125,7	159,6		199,8		
Max. Speed, [min ⁻¹]	Cont.	500	500	475	375		300	
	Int.*	600	600	600	470		375	
Max. Torque [daNm]	Cont.	19,5	24	30	30	39	30	45
	Int.*	22	28	34	39	43	39	50
	Peak**	27	32	37	46	46	56	56
Max. Output [kW]	Cont.	16,6	18,6	12,5	10	11,5	7,8	11
	Int.*	16	16	14,5	12,5	14	12,4	13
Max. Pressure Drop, [bar]	Cont.	175	175	175	135	175	105	175
	Int.*	200	200	200	175	200	145	200
	Peak**	225	225	225	225	225	225	225
Max. Oil Flow [l/min]	Cont.	40	50	60	60		60	
	Int.*	48	60	75	75		75	
Max. Inlet Pressure [bar]	Cont.	175						
	Int.*	200						
	Peak**	225						
Max. Starting Pressure [bar]	10	10	9	7		5		
Min. Starting Torque, [daNm]	At max.press.dropCont	15	20	25	24	32	26	41
	At max.press.dropInt.*	17	23	28	32	37	33	46
Min. Speed***, [min ⁻¹]	10	10	10	10	10	10	10	
Static Torque of Brake, [daNm]	55							
Min. Brake Release Pressure****, [bar]	21							
Max. Opening Pressure, [bar]	200							
Weight, [kg]	11,0	11,2	11,4	11,6	11,7	12,2	12,3	

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 10 RPM or lower, consult factory or your regional manager.

**** Motor-brakes must always have a drain line. The brake release pressure is the difference between the pressure in the brake release line and the pressure in the drain line.

1. Intermittent speed and intermittent pressure drop must not occur simultaneously.
2. Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
3. Recommended using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
4. Recommended minimum oil viscosity 13 mm²/s at operating temperatures.
5. Recommended maximum system operating temperature is 82°C.
6. To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

[SPECIFICATION DATA (continued)]

Type		ORBR 250 C	ORBR 250 CB	ORBR 315 C	ORBR 315 CB	ORBR 400 C	ORBR 400 CB
Displacement, cm. ³ /rev.		250,1		315,7		397	
Max. Speed, [min ⁻¹]	Cont.	240		190		150	
	Int.*	300		240		190	
Max. Torque [daNm]	Cont.	30	54	30	55	30	55
	Int.*	39	57	42	57	43	57
	Peak**)	60	71	61	71	60	70
Max. Output [kW]	Cont.	6,2	10	4,5	9	2,2	7
	Int.*	9,5	11	7,5	10	5,6	8,7
Max. Pressure Drop, [bar]	Cont.	85	175	65	135	45	105
	Int.*	115	185	90	145	75	115
	Peak**	200	225	150	180	120	140
Max. Oil Flow [l/min]	Cont.	60					
	Int.*	75					
Max. Inlet Pressure [bar]	Cont.	175					
	Int.*	200					
	Peak**	225					
Max. Starting Pressure [bar]		5		5		5	
Min. Starting Torque, [daNm]	At max.press.drop Cont	24	50	26	50	24	44
	At max.press.drop Int.*	31	51,5	35	51,8	38	50
Min. Speed***, [min ⁻¹]		10	10	10	10	10	10
Static Torque of Brake, [daNm]		55					
Min. Brake Release Pressure****, [bar]		21					
Max. Opening Pressure, [bar]		200					
Weight, [kg]		12,6	12,7	13,3	13,4	14	14,1

* Intermittent operation: the permissible values may occur for max. 10% of every minute.


** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds of 10 RPM or lower, consult factory or your regional manager.

**** Motor-brakes must always have a drain line. The brake release pressure is the difference between the pressure in the brake release line and the pressure in the drain line.

- Intermittent speed and intermittent pressure drop must not occur simultaneously.
- Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- Recommended using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
- Recommended minimum oil viscosity 13 mm²/s at operating temperatures.
- Recommended maximum system operating temperature is 82°C.
- To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.


[OUTLINE DIMENSIONS REFERENCE]

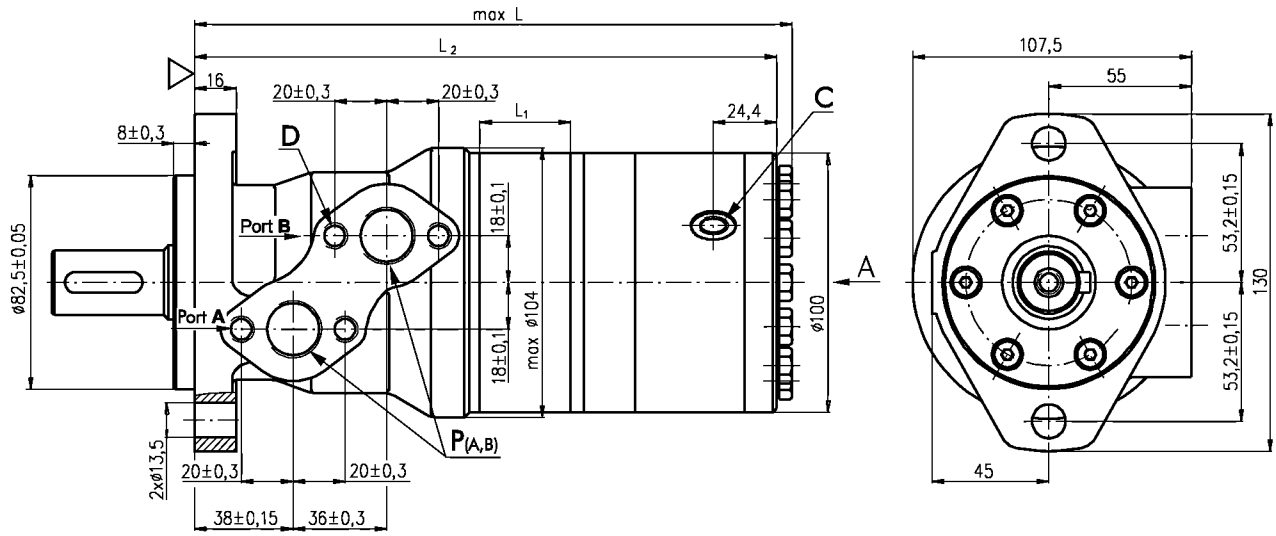

- D** : 4xM8 - 13 mm depth
- C** : G1/4 - 12 mm depth
- P_(A,B)** : 2xG1/2 - 15 mm depth
- T** : G1/4 - 10 mm depth

Type	L ₁ , mm	L ₂ , mm	L _{max} , mm
ORBR 80	14,0	205,5	213,5
ORBR 100	17,4	209,0	217,0
ORBR 125	21,8	213,5	221,5
ORBR 160	27,8	219,5	227,5
ORBR 200	34,8	226,5	234,5
ORBR 260	43,5	235,0	243,0
ORBR 315	54,8	246,5	254,5
ORBR 400	69,4	261,0	269,0


- Standard Rotation**
Viewed from Shaft End
Port A Pressurized - CW
Port B Pressurized - CCW
- Reverse Rotation**
Viewed from Shaft End
Port A Pressurized - CCW
Port B Pressurized - CW

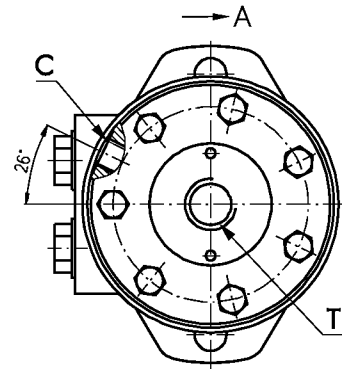


▽ - Motor Mounting Surface

[SHAFT EXTENSIONS]


[C] - ø25 straight, Parallel key A8x7x32 DIN 6885
Max. Torque 34 daNm

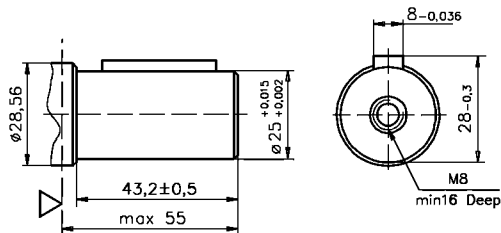

[CB] - ø32 straight, Parallel key A10x8x45 DIN 6885
Max. Torque 77 daNm

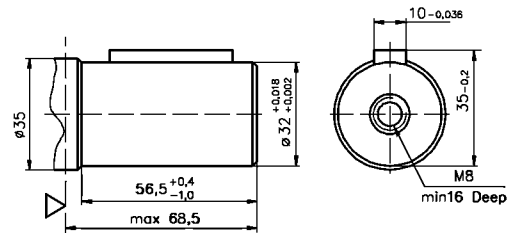


PERMISSIBLE SHAFT LOADS

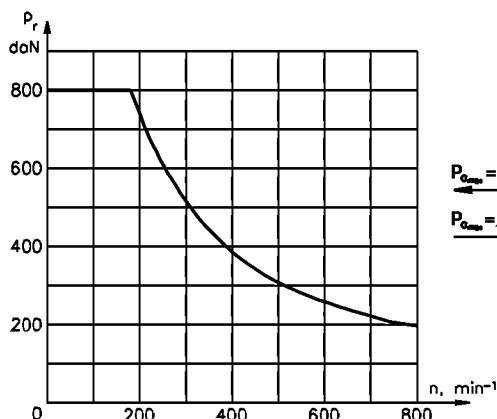

$P_{o_{max}} = 150$ daN


$P_{o_{max}} = 200$ daN

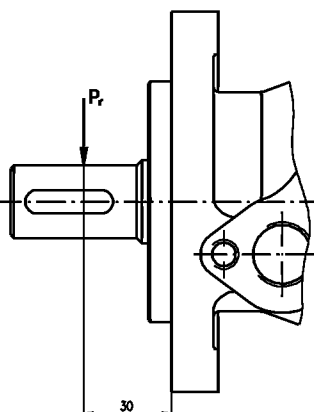

For Rotation speed $n \geq 200$ min⁻¹ and distance $L \neq 30$ mm the radial load could be calculated by

$$P_r = \frac{800}{n} \times \frac{25\,000}{95+L}, \text{ daN}$$

MAX. PERMISSIBLE SHAFT SEAL PRESSURE

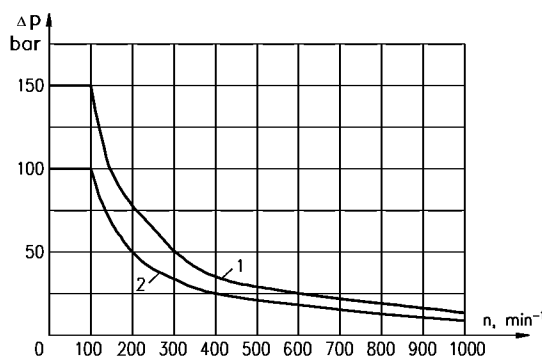

1: Drawing for "C" shaft

2: Drawing for "CB" shaft

ORDER CODE

	1	2	3	4
ORBR				

Pos. 1 - Displacement code

80	- 80,3 [cm ³ /rev]
100	- 99,8 [cm ³ /rev]
125	- 125,7 [cm ³ /rev]
160	- 159,6 [cm ³ /rev]
200	- 199,8 [cm ³ /rev]
250	- 250,1 [cm ³ /rev]
315	- 315,7 [cm ³ /rev]
400	- 397,0 [cm ³ /rev]

Pos. 2 - Shaft Extensions*

C	- $\varnothing 25$ straight, Parallel key A8x7x32 DIN 6885
CB	- $\varnothing 32$ straight, Parallel key A10x8x45 DIN 6885

Pos. 3 - Design Series

omit - Factory specified

Pos. 4 - Design Series

omit - Factory specified

NOTES:

* The permissible output torque for shafts must be not exceeded!

The hydraulic motors are mangano phosphatized as standard.

MOTOR APPLICATION

VEHICLE DRIVE CALCULATIONS

1. Motorspeed: n , [min^{-1}]

$$n = \frac{2,65 \times v \times i}{R}$$

v - vehicle speed, [km/h];

R - wheel rolling radius, [m];

i - gear ratio between motor and wheels.

If no gearbox, use $i=1$.

2. Rolling resistance: RR , [daN]

The resistance force resulted in wheels contact with different surfaces:

$$RR = G \times \rho$$

G - total weight loaded on vehicle, [daN];

ρ - rolling resistance coefficient (Table 1).

Table 1

Rolling resistance coefficient In case of rubber tire rolling on different surfaces	
Surface	ρ
Concrete- faultless	0,010
Concrete- good	0,015
Concrete- bad	0,020
Asphalt- faultless	0,012
Asphalt- good	0,017
Asphalt- bad	0,022
Mocodrom- faultless	0,015
Mocodrom- good	0,022
Mocodrom- bad	0,037
Snow- 5 cm	0,025
Snow- 10 cm	0,037
Polluted covering- smooth	0,025
Polluted covering- sandy	0,040
Mud	0,037 ÷ 0,150
Sand- Gravel	0,060 ÷ 0,150
Sand- loose	0,160 ÷ 0,300

3. Grade resistance: GR , [daN]

$$GR = G \times (\sin \alpha + \rho \times \cos \alpha)$$

α - gradient negotiation angle (Table 2)

Table 2

Grade %	α Degrees	Grade %	α Degrees
1%	0° 35'	12%	6° 5'
2%	1° 9'	15%	8° 31'
5%	2° 51'	20%	11° 19'
6%	3° 26'	25%	14° 3'
8%	4° 35'	32%	18°
10%	5° 43'	60%	31°

4. Accelerate force: FA , [daN]

Force FA necessary for acceleration from 0 to maximum speed v and time t can be calculated with a formula:

$$FA = \frac{v \times G}{3,6 \times t}, [\text{daN}]$$

FA - accelerate force, [daN];

t - time, [s].

5. Tractive effort: DP , [daN]

Tractive effort DP is the additional force of trailer. This value will be established as follows:

-according to constructor's assessment;

-as calculating forces in items 2, 3 and 4 of trailer; the calculated sum corresponds to the tractive effort requested.

6. Total tractive effort: TE , [daN]

Total tractive effort TE is total effort necessary for vehicle motion; that the sum of forces calculated in items from 2 to 5 and increased with 10 % because of air resistance.

$$TE = 1,1 \times (RR + GR + FA + DP)$$

RR - force acquired to overcome the rolling resistance;

GR - force acquired to slope upwards;

FA - force acquired to accelerate (acceleration force);

DP - additional tractive effort (trailer).

7. Motor Torque: M , [daNm]

Necessary torquemoment for every hydraulic motor:

$$M = \frac{TE \times R}{N \times i \times \eta_M}$$

N - motor numbers;

η_M - mechanical gear efficiency (if it is available).

8. Cohesion between tire and road covering: M_w , [daNm]

$$M_w = \frac{G_w \times f \times R}{i \times \eta_M}$$

To avoid wheel slipping, it should be observed the following condition $M_w > M$

f - frictional factor;

G_w - total weight over the wheels, [daN].

Table 3

Surface	Frictional factor f
Steel on steel	0,15 ÷ 0,20
Rubber tire on polluted surface	0,5 ÷ 0,7
Rubber tire on asphalt	0,8 ÷ 1,0
Rubber tire on concrete	0,8 ÷ 1,0
Rubber tire on grass	0,4


9.Radial motor loading: P_{rad} , [daN]

When motor is used for vehicle motion with wheels mounted directly on motor shaft, the total radial loading of motor shaft P_{rad} is a sum of motion force and weight force acting on one wheel.

G_w - Weight held by wheel;

P_{rad} - Total radial loading of motor shaft;

M/R - Motion force.





$$P_{rad} = \sqrt{G_w^2 + \left(\frac{M}{R}\right)^2}$$

In accordance with calculated loadings the suitable motor from the catalogue is selected.

DRAINAGE SPACE AND DRAINAGE PRESSURE

Advantages in oil drainage from drain space: Cleaning; Cooling and Seal lifetime prolonging.

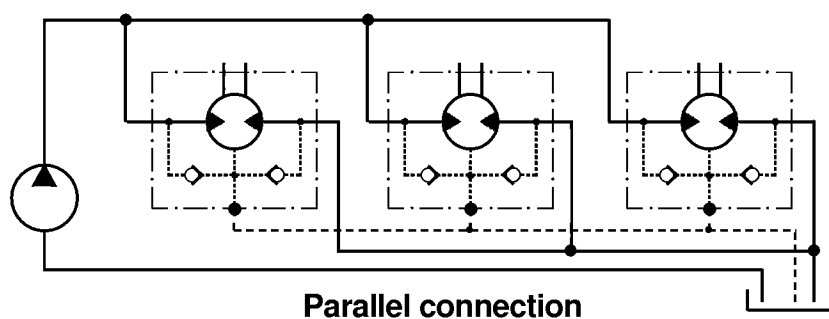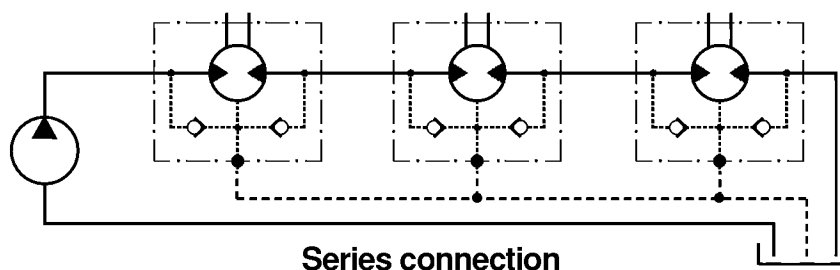




Infinite resources for multiple applications:



SINCE 1988 AT YOUR SERVICE

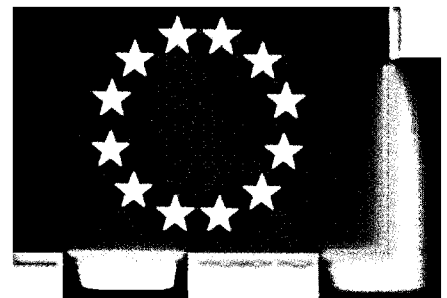


EUROPEAN TECHNOLOGY IN THE WORLD


Meta Hydraulic S.r.l.

Via Diogene, 3

42048 Rubiera (RE) - Italy

www.metahydraulic.com

 +39 0522 621228

 +39 0522 260385

e-mail: info@metahydraulic.com

The right modifications for technical improvement is reserved.